



RECOMMENDED PANEL CUTOUT
MAX. PANEL THICKNESS 1-6mm



SCHEMATIC
SPST - OFF-(ON)
() DENOTES MOMENTARY


NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. TERMINAL NUMBERS FOR REF ONLY
4. CONTACT MATERIAL: SILVER
5. RATING: 2A 36 VDC
6. ELECTRIC LIFE: 200,000 CYCLES
9. DIELECTRIC STRENGTH: 2,000 VAC MIN. FOR 1 MINUTE
10. CONTACT RESISTANCE: 50m Ω MAX. @ 1A 12VDC
11. OPERATING TEMP.: -20°C to 70°C
12. ▲ DENOTES CRITICAL PARAMETER.
- ▲ 13. LAMP VOLTAGE: 20mA 3.1V TYP.
14. TRAVEL: 1.80mm
15. ACTUATION FORCE: 4.5 ± 1.5 N
16. MOUNTING NUT TORQUE: 1-3 Nm
17. INGRESS PROTECTION: IP67, IK10
18. HARDWARE SUPPLIED: O-RING AND HEXNUT

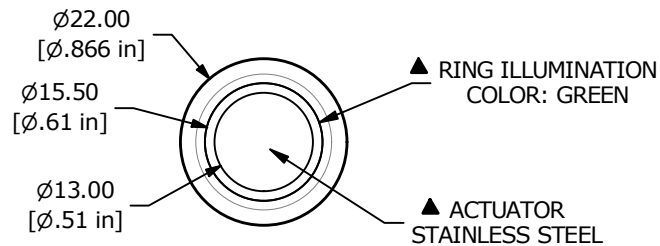


▲ RING ILLUMINATION
COLOR: GREEN


▲ ACTUATOR
STAINLESS STEEL

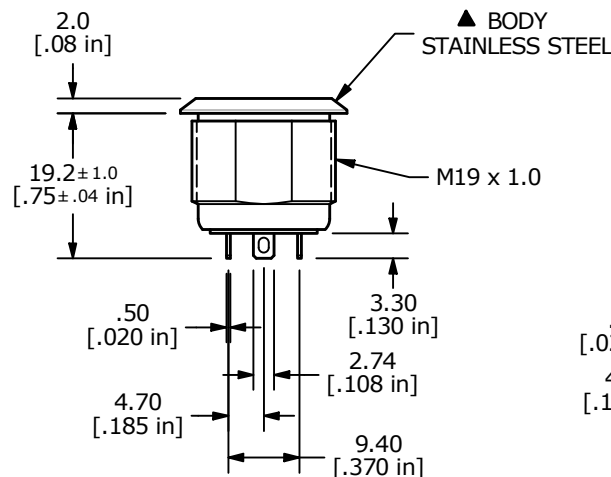

▲ BODY
STAINLESS STEEL

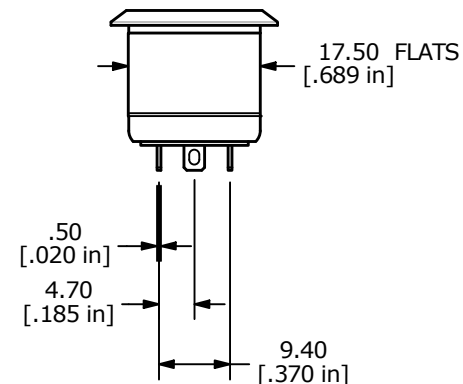

17.50 FLATS
[.689 in]

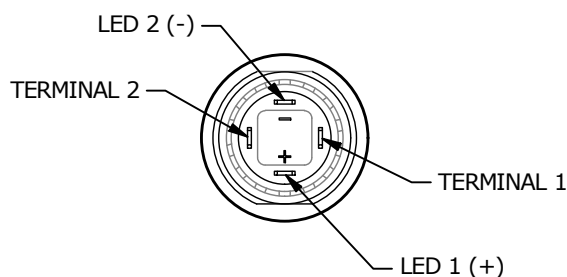

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
C	ECO-101692	print update	03/20/23	MW	TITLE SV4F23SS-331				100119982
					SCALE	DATE	DR	DWG	REV
					1:1	11/5/2021	MW	T840007	C

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO
E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED