SHEET 1 OF 1

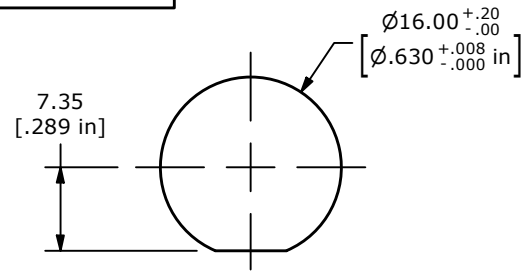

RECOMMENDED PANEL CUTOUT
PANEL THICKNESS 1.0 - 6.0 [.04 -.24in]

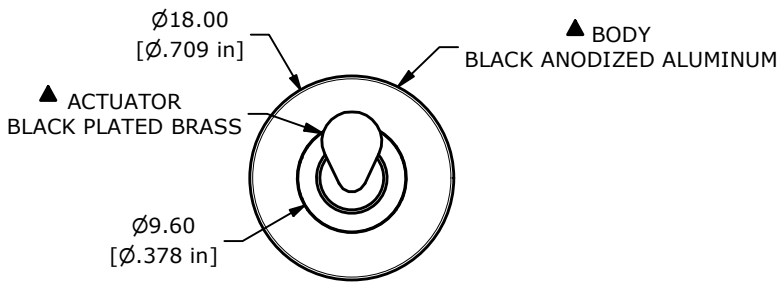

▲

SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
ON	NONE	ON
2-1	N/A	3-1



▲ CIRCUIT: SPDT

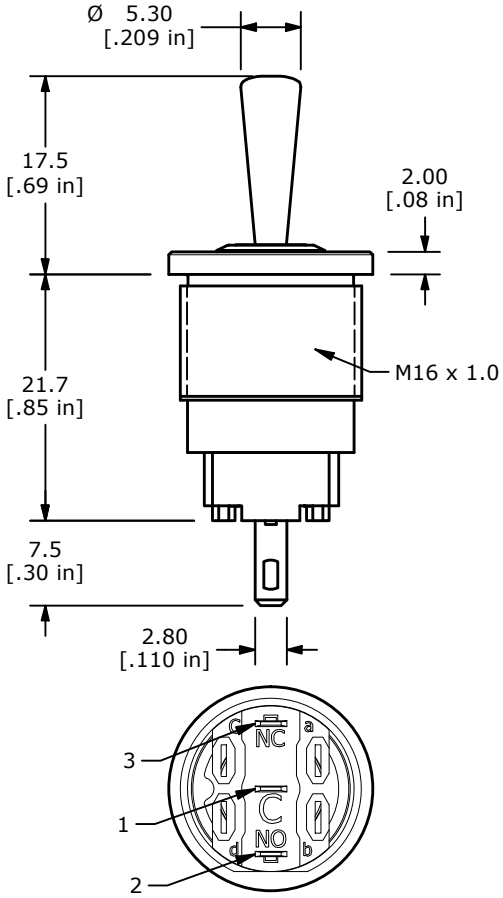

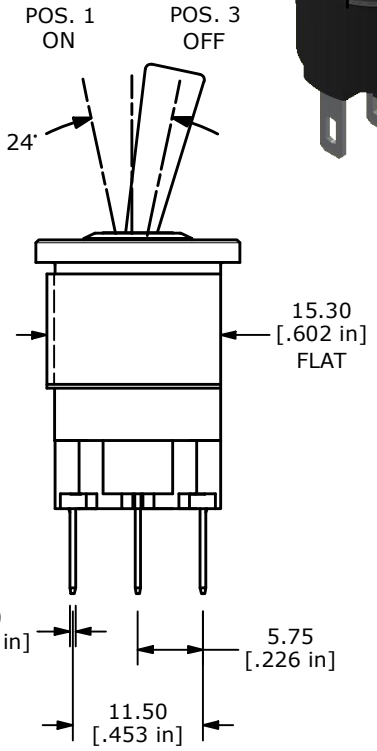

NOTE:
1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ±0.4
   X.XX = ±0.25
3. TERMINAL NUMBERS FOR REF ONLY
4. CONTACT MATERIAL: SILVER
▲ 5. RATING: 12:250V @ 15A, 15:250V @ 3A
6. ELECTRIC LIFE: 50,000 CYCLES AT FULL LOAD.
7. INSULATION RESISTANCE: 1,000 MΩ MIN.
8. DIELECTRIC STRENGTH: 1,500 VAC MIN. FOR 1 MINUTE
9. CONTACT RESISTANCE: 50mΩ MAX.
▲ 10. OPERATING TEMP.: -40°C TO 85°C (NO FREEZING
KEEP THE AIR MOVING AROUND THE ACTUATOR)
11. ▲ DENOTES CRITICAL PARAMETER.
12. HARDWARE SUPPLIED: O-RING AND HEXNUT
13. INGRESS RATING: IP67
▲ 14. LAMP VOLTAGE: NON-ILLUMINATED

REV	ECO NO	DESCRIPTION	DATE	BY
A	ECO-104160	RELEASE	09/03/26	MR

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E·SWITCH®

OBJECT ID 100132913

TITLE TAV16S2311

SCALE	DATE	DR	DWG	REV
3:2	6/2/2026	JS	52-TAV16S2311	A