

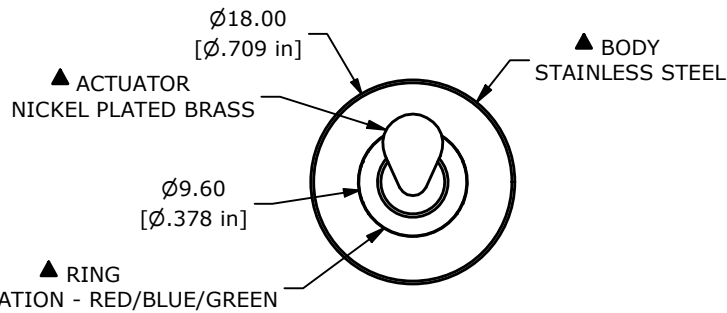

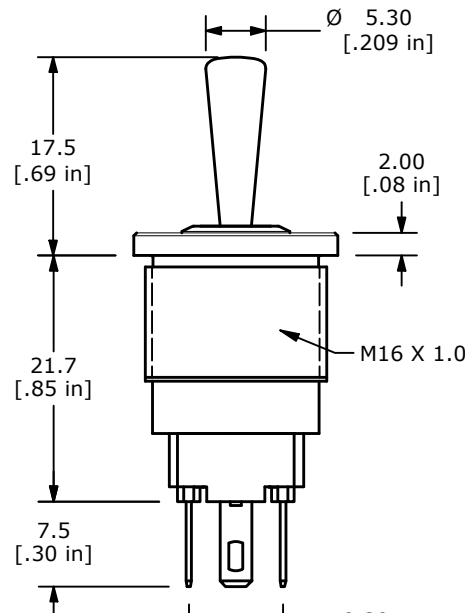


RECOMMENDED PANEL CUTOUT
PANEL THICKNESS 1.0 - 6.0 [.04 -.24 in]

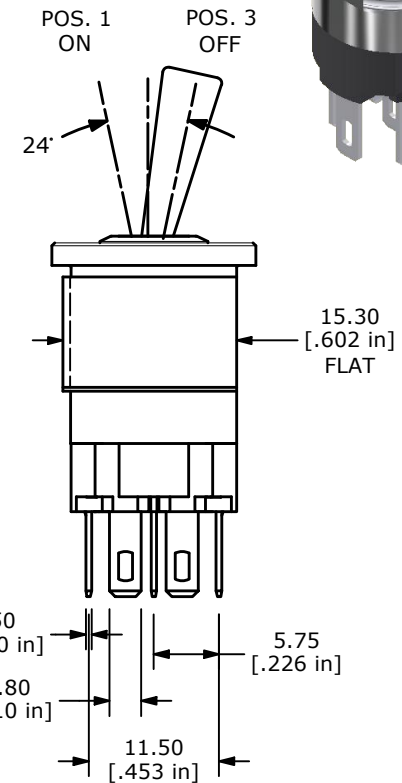

SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
ON	NONE	ON
2-1	N/A	3-1

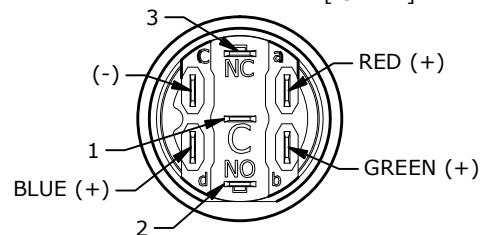

NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. TERMINAL NUMBERS FOR REF ONLY
4. CONTACT MATERIAL: SILVER
- ▲ 5. RATING: 12:250V @ 15A, 15:250V @ 3A
6. ELECTRIC LIFE: 50,000 CYCLES AT FULL LOAD.
7. INSULATION RESISTANCE: 1,000 M Ω MIN.
8. DIELECTRIC STRENGTH: 1,500 VAC MIN. FOR 1 MINUTE
9. CONTACT RESISTANCE: 50m Ω MAX.
- ▲ 10. OPERATING TEMP.: -40°C TO 85°C (NO FREEZING
KEEP THE AIR MOVING AROUND THE ACTUATOR)
11. ▲ DENOTES CRITICAL PARAMETER.
12. HARDWARE SUPPLIED: O-RING AND HEXNUT
13. INGRESS RATING: IP67
- ▲ 14. LAMP VOLTAGE: RED - 1.8V, GREEN - 2.8V, BLUE - 2.8V

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
A	ECO-104160	RELEASE	09/03/26	MR	TITLE TAV16S23SSR1				100132923
					SCALE	DATE	DR	DWG	REV
					3:2	6/8/2026	JS	52-TAV16S23SSR1	A

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO
E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED