


RECOMMENDED
PCB LAYOUT

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. TERM. NUMBERS FOR REFERENCE ONLY.
4. CONTACT MATERIAL: SILVER
5. RATING: 1mA 5VDC, 50mA 16VDC
6. OPERATING FORCE: 500gf MAX.
7. ELECTRICAL LIFE: 150,000 CYCLES min.
8. INSULATION RESISTANCE: 100M OHMS min @500VDC
9. OPERATING TEMPERATURE: -40°C to 85°C
10. DIELECTRIC STRENGTH: 500VAC FOR 1 MINUTE
11. IP RATING: IP67
12. ▲ DENOTES CRITICAL PARAMETER

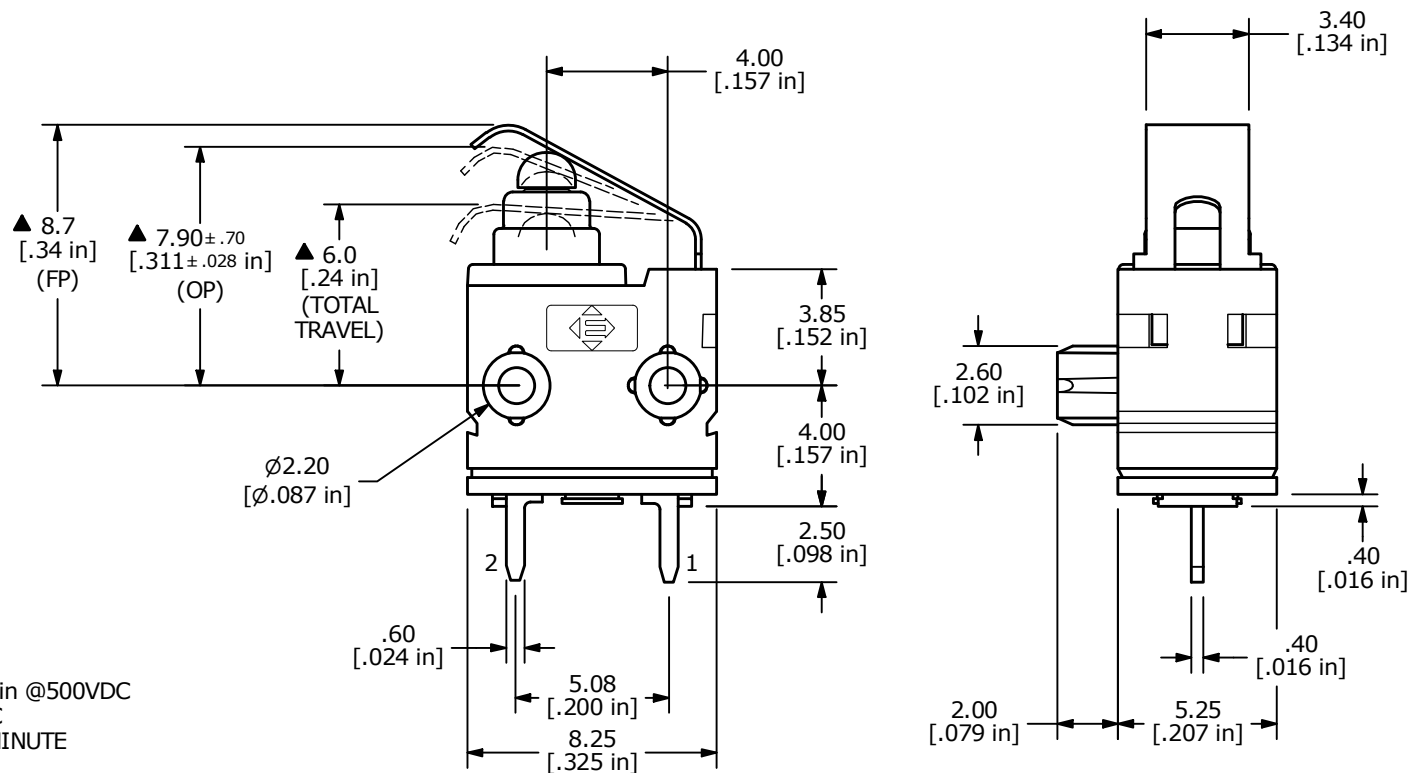

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
A	ECO-101638	Release	02/24/23	MW	TITLE TD1250BF160QP1				100123496
					SCALE	DATE	DR	DWG	REV
					4:1	1/17/2023	MW	N125003	A

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO
E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED