
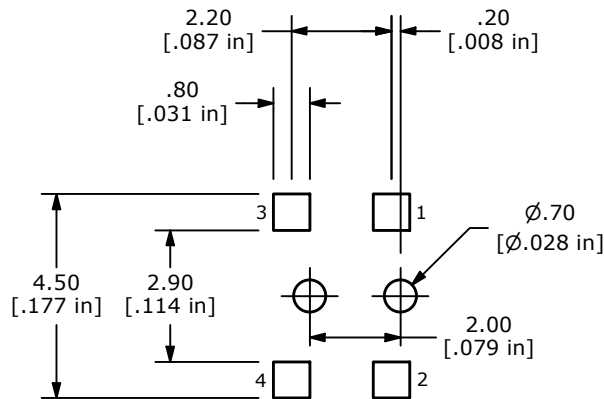
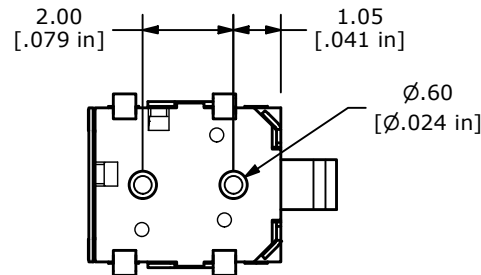
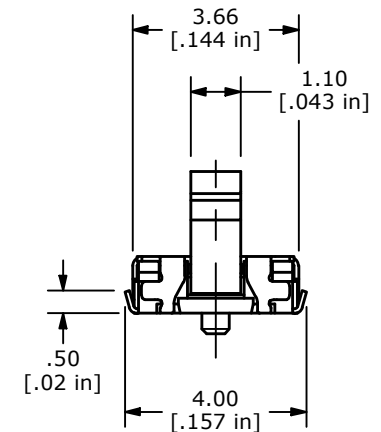
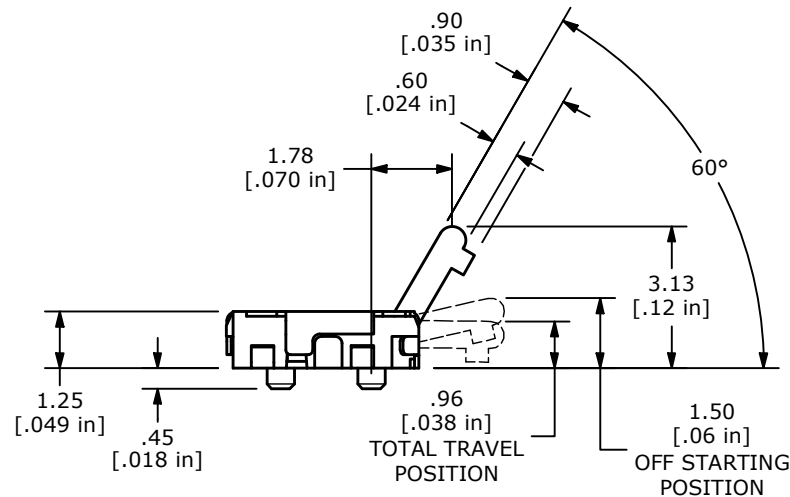



NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REFERENCE ONLY.
4. RATING: 1mA @ 5VDC MAX.
5. OPERATING FORCE: 35gf MAX
6. CONTACT RESISTANCE: 3Ω MAX.
7. OPERATING LIFE: 50,000 CYCLES
8. INSULATION RESISTANCE: 100MΩ min @ 100VDC
9. OPERATING TEMPERATURE: -40°C to 85°C
10. DIELECTRIC STRENGTH: 100VAC FOR 1 MINUTE
11. ▲ DENOTES CRITICAL PARAMETER
12. PACKAGING: TAPE AND REEL

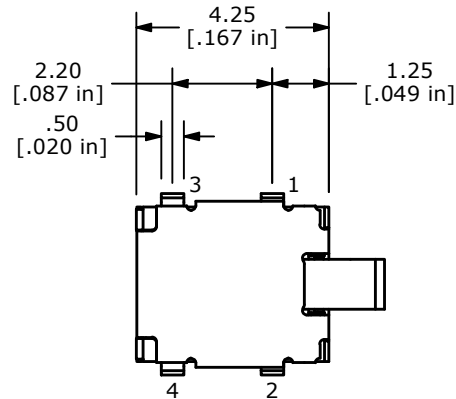

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
B	ECO-103122	update notes	12/16/24	MW	TITLE TD1260BGQJR				100127589
					SCALE	DATE	DR	DWG	REV
					6:1	6/24/2024	MW	N126001	B

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO
E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED