
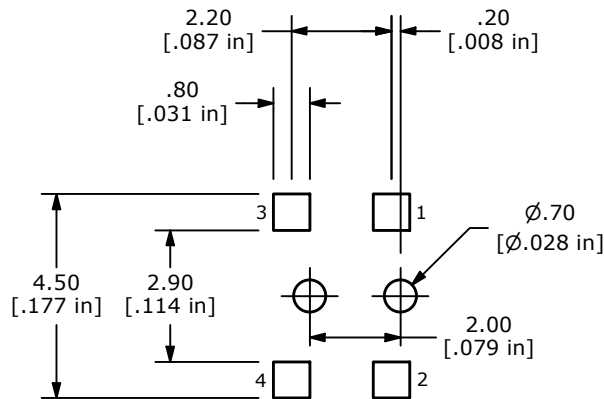
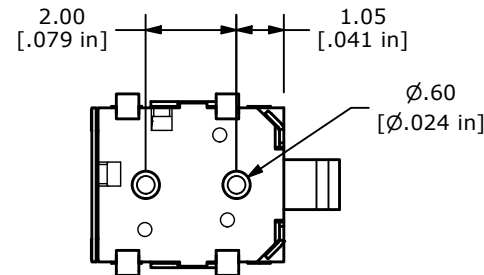
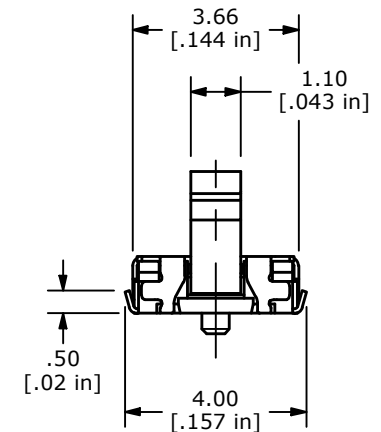
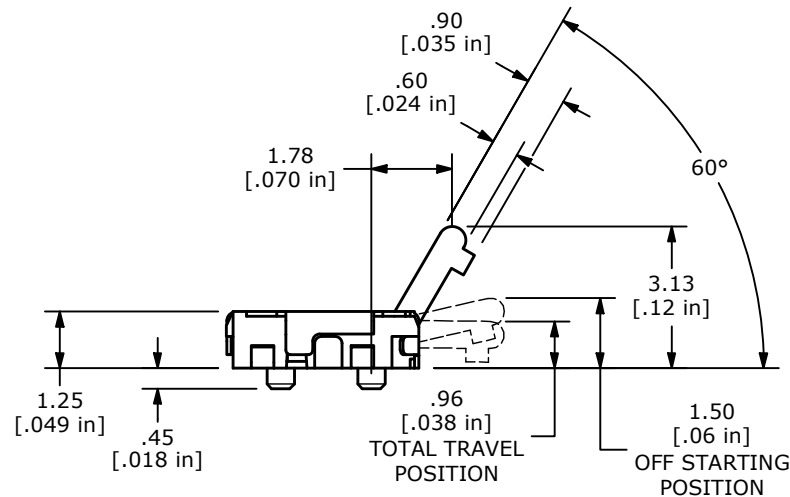



NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REFERENCE ONLY.
4. RATING: 1mA @ 5VDC MAX.
5. OPERATING FORCE: 35gf MAX
6. CONTACT RESISTANCE: 3Ω MAX.
7. OPERATING LIFE: 50,000 CYCLES
8. INSULATION RESISTANCE: 100MΩ min @ 100VDC
9. OPERATING TEMPERATURE: -40°C to 85°C
10. DIELECTRIC STRENGTH: 100VAC FOR 1 MINUTE
11. ▲ DENOTES CRITICAL PARAMETER
12. PACKAGING: TAPE AND REEL

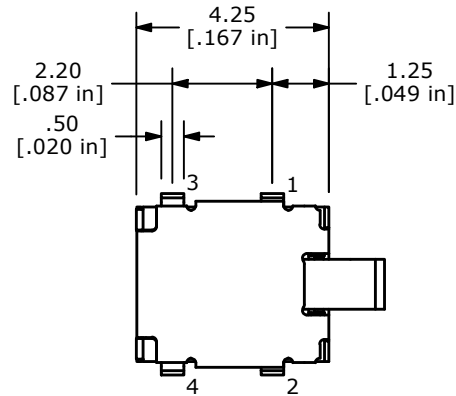

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
A	ECO-103326	RELEASE	03/26/25	JS	TITLE TD1260BHQJR				100129979
					SCALE	DATE	DR	DWG	REV
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED					6:1	3/24/2025	JS	N126002	A