
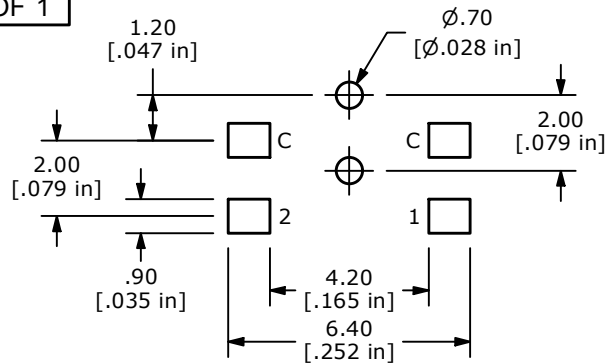









PCB LAYOUT

▲ SCHEMATIC
NORMALLY OPEN

LEVER POSITION	TERMINAL NO.
F	C
A	C, 1
B	C, 2

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. TERM. NUMBERS FOR REFERENCE ONLY.
4. RATING: 10mA @ 5VDC
5. OPERATING FORCE: 30gf max.
6. CONTACT RESISTANCE: 500m Ω max.
7. ELECTRICAL LIFE: 100,000
8. INSULATION RESISTANCE: 100M Ω MIN @ 100VDC
9. OPERATING TEMPERATURE: -40°C to 85°C
10. DIELECTRIC STRENGTH: 100VAC FOR 1 MINUTE
11. PACKAGING: 3,800 PER REEL
12. ▲ DENOTES CRITICAL PARAMETER

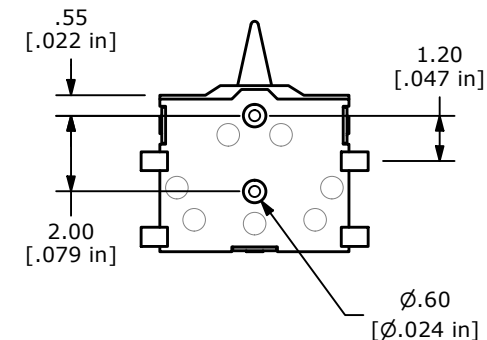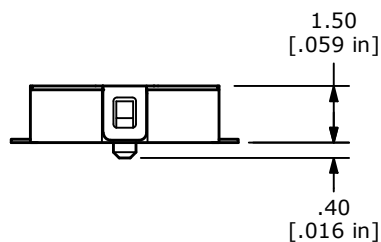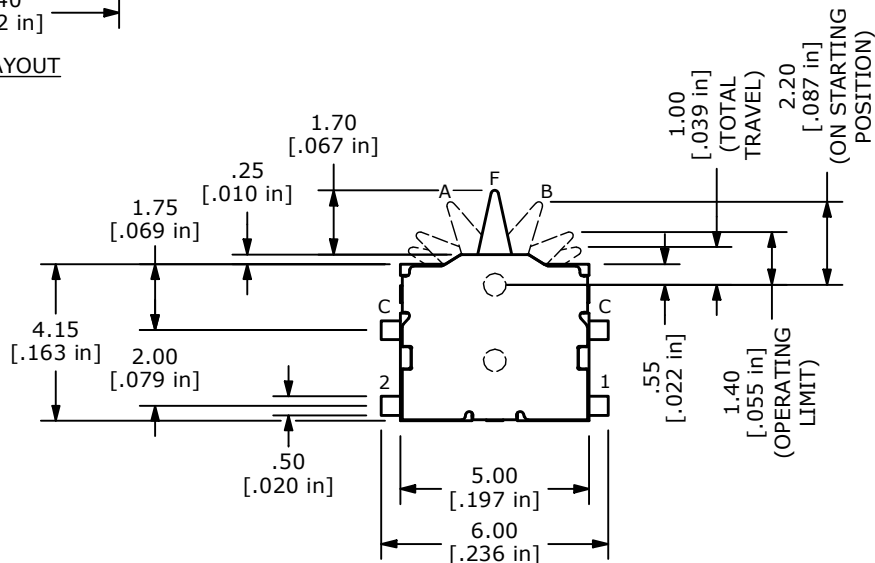

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
A	ECO-103719	Release	10/14/25	MW	TITLE TD1270BGQGR				100131138
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED					SCALE	DATE	DR	DWG	REV
					5:1	10/6/2025	MW	N127001	A