



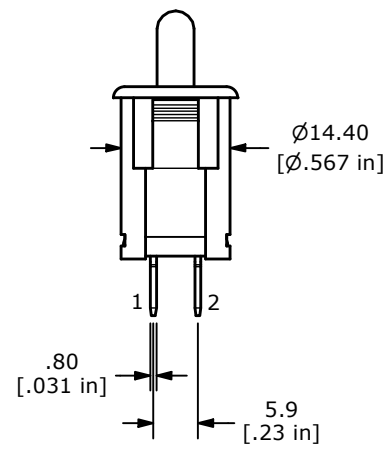


RECOMMENDED CUTOUT

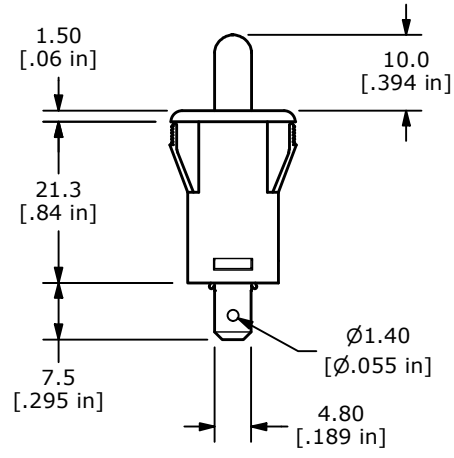

CIRCUIT: SPST
OFF (ON)

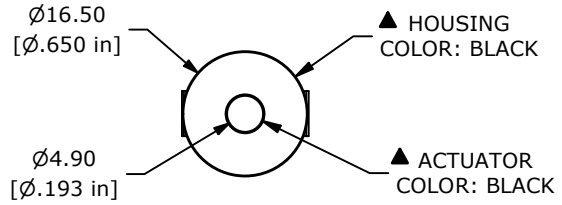

- NOTES:
1. ALL DIMENSIONS IN MM [INCH]
 2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
 - ▲ 3. RATING: 12A, GP/R, 125/250VAC, 50/60Hz
 4. CONTACT RESISTANCE: 20m Ω MAX.
 5. INSULATION RESISTANCE: 100M Ω MIN @ 500VDC
 6. ACTUATOR FORCE: 200 $\pm$ 30gf
 7. TRAVEL: 9mm
 8. OPERATING TEMPERATURE: -0°C to 105°C
 9. OPERATING LIFE: 10,000
 10. ▲ DENOTES CRITICAL PARAMETERS

REV	ECO NO	DESCRIPTION	DATE	BY	 E-SWITCH®				OBJECT ID
A	ECO-103404	Release	05/06/25	MW	TITLE TD13501A1ABB				100130143
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED					SCALE	DATE	DR	DWG	REV
					1:1	4/16/2025	MW	14-TD13501A1ABB	A