

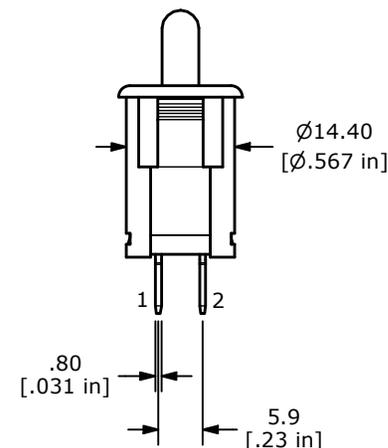
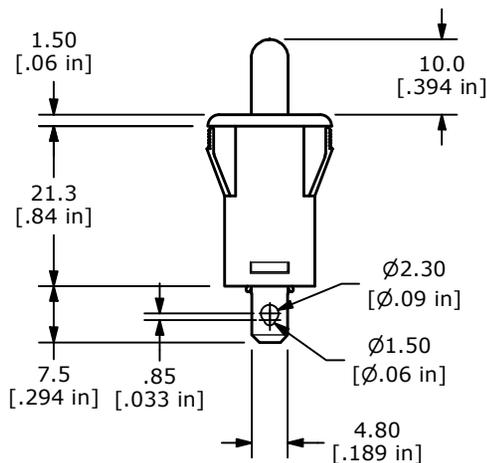

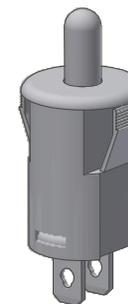


RECOMMENDED CUTOUT

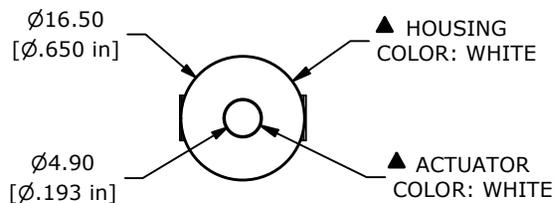

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ±0.4
X.XX = ±0.25
- ▲ 3. RATING: 12A, GP/R, 125/250VAC, 50/60Hz
4. CONTACT RESISTANCE: 20mΩ MAX.
5. INSULATION RESISTANCE: 100MΩ MIN @ 500VDC
6. ACTUATOR FORCE: 200 ±30gf
7. TRAVEL: 9mm
8. OPERATING TEMPERATURE: -0°C to 105°C
9. OPERATING LIFE: 10,000
10. ▲ DENOTES CRITICAL PARAMETERS

REV	ECO NO	DESCRIPTION	DATE	BY	 E-SWITCH®				OBJECT ID
A	ECO-103406	Release	05/14/25	MW	TITLE TD13502A1AWW				100130215
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED					SCALE	DATE	DR	DWG	REV
					1:1	4/22/2025	MW	14-TD13502A1AWW	A