



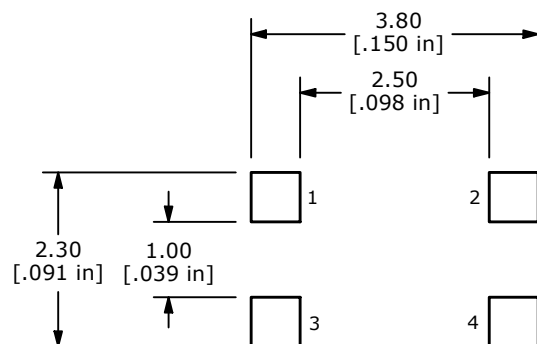






P.C.B LAYOUT



CIRCUIT: SPST

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. TERM. NUMBERS FOR REFERENCE ONLY.
4. RATING: 12VDC, 50mA
- ▲ 5. OPERATING FORCE: 160 $\pm$ 50gf
6. TRAVEL: 0.15 $\pm$ 0.1mm
7. CONTACT RESISTANCE: 100m Ω Max. Initial
8. MECHANICAL/ELECTRICAL LIFE: 500,000 CYCLES
9. PACKAGE: TAPE AND REEL
10. ▲ DENOTES CRITICAL PARAMETER

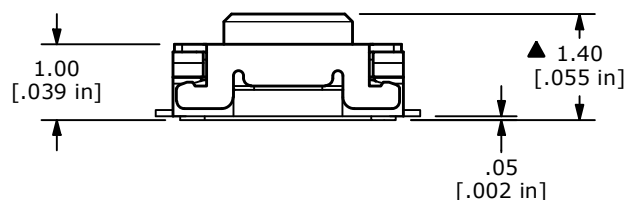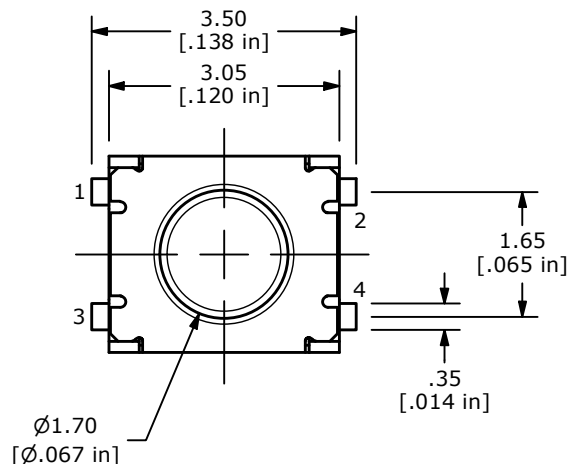

REV	ECO NO	DESCRIPTION	DATE	BY	 E-SWITCH®				OBJECT ID
A	ECO-102371	Release	11/28/23	MW	TITLE TL1018AAAF160QG				100125667
					SCALE	DATE	DR	DWG	REV
					10:1	9/15/2023	MW	P421801	A

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED