





P.C. MOUNTING

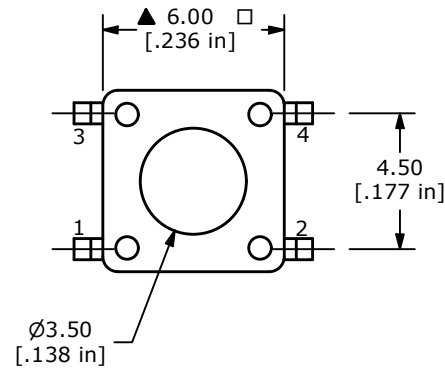

CIRCUIT: SPST ▲

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. TERMINAL NUMBERS FOR REF. ONLY
3. TOLERANCE: X.X=± 0.4
X.XX=± 0.25
4. RATING: 50mA @ 12VDC
- ▲ 5. TRAVEL: 0.25 +0.2/-0.1
6. OPERATING FORCE: 250 ± 50gf
7. ELECTRICAL LIFE: 100,000 CYCLES MIN.
8. CONTACT RESISTANCE: 100mΩ MAX.
- ▲ 9. CONTACT MATERIAL: GOLD
10. ▲ DENOTES CRITICAL PARAMETER
11. OPERATING TEMP: -40°C TO 85°C

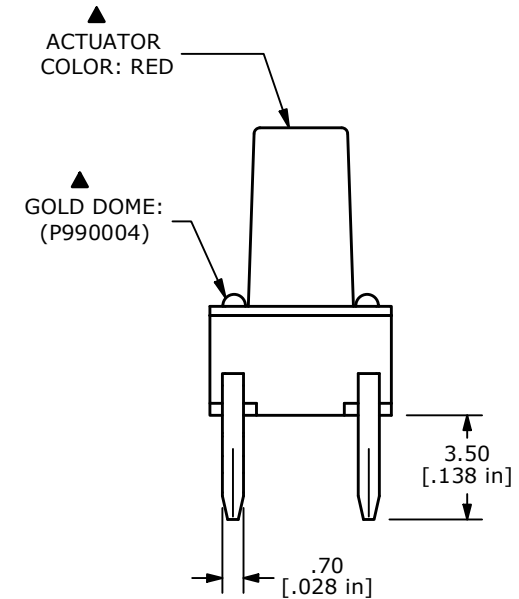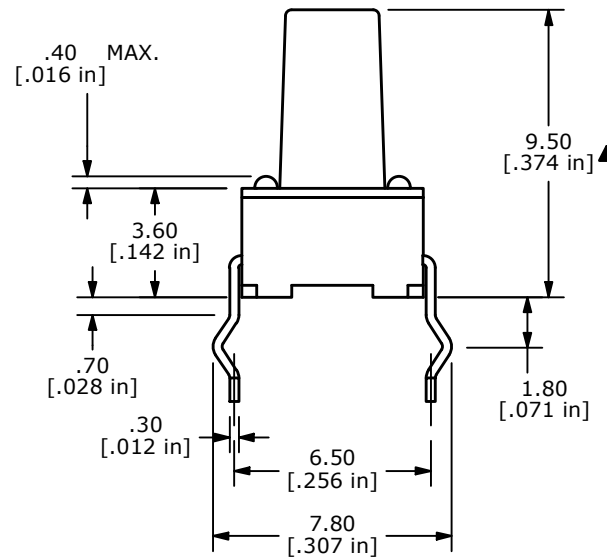

C	24546	CHANGED OPERATING TEMPERATURE	10/19/20	JM	 E-SWITCH®			
B	18714	CHANGE DOME # (WAS P990005 - 160gf)	11/17/09	BLR				
A	18689	Released For Production	10/23/09	BLR	TITLE TL1105BF250R			
REV	PCR NO	DESCRIPTION	DATE	BY	SCALE	DATE	DR	REV
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED					4:1	11/17/2009	BLR	C
							DWG P010050	