
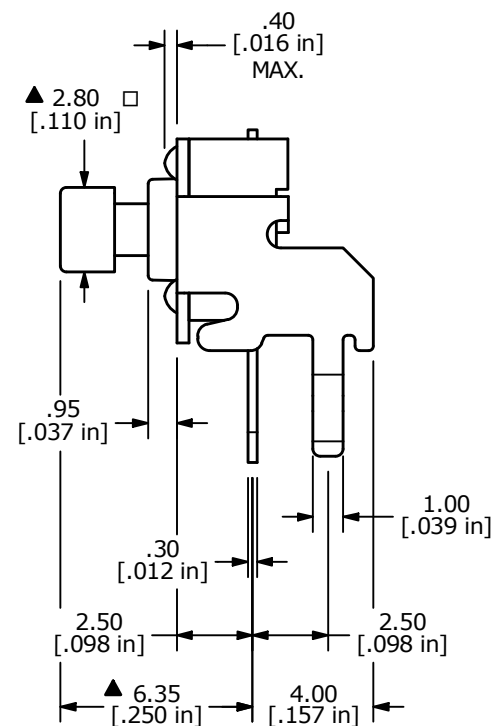
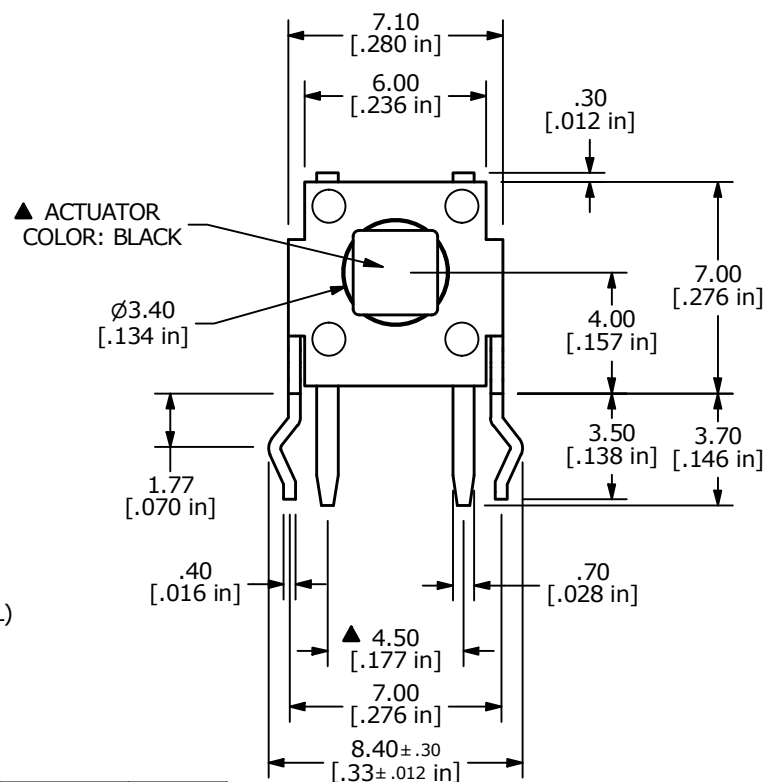
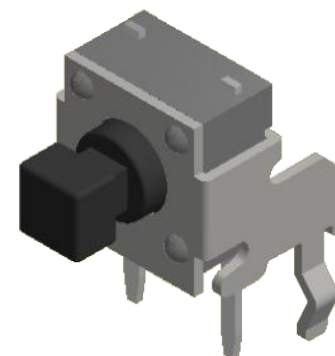
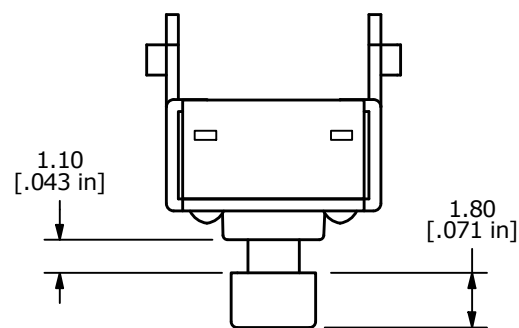



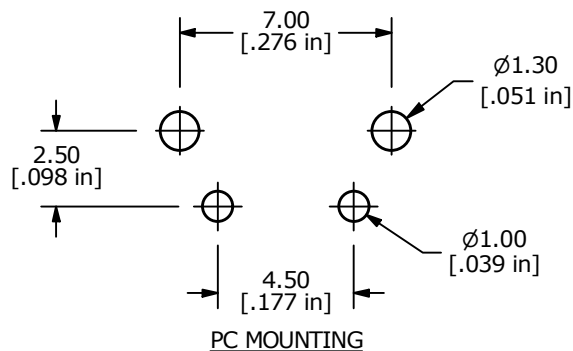

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. TERM. NOS. FOR REFERENCE ONLY.
4. RATING: 12VDC, 50mA
- ▲ 5. OPERATING FORCE: 160 $\pm$ 50gf
6. TRAVEL: 0.25mm +0.2/-0.1 mm
7. CONTACT RESISTANCE: 100 MILLI OHMS MAX. (INITIAL)
8. MECHANICAL/ELECTRICAL LIFE 100,000 CYCLES MIN.
- ▲ 9. CONTACT MATERIAL: SILVER
10. ▲ DENOTES CRITICAL PARAMETER
11. OPERATING TEMP: -40°C to 85°C

G	24728	update print and add term. length	2/2/21	MW
F	24548	REMOVE STEP IN HOUSING, CHANGE TEMP	10/19/20	JM
E	18742	LEG TOLERANCE WAS +/- 0.1	1/12/10	BLR
D	12357	ADD NOTE 12	8/7/02	CB
C	12354	ADD NOTCH	8/6/02	CB
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED



OBJECT ID
000017702

TITLE TL1105JAF160Q

SCALE
4:1

DATE
1/12/2010

DR
BLR

DWG
P010205

REV
G