
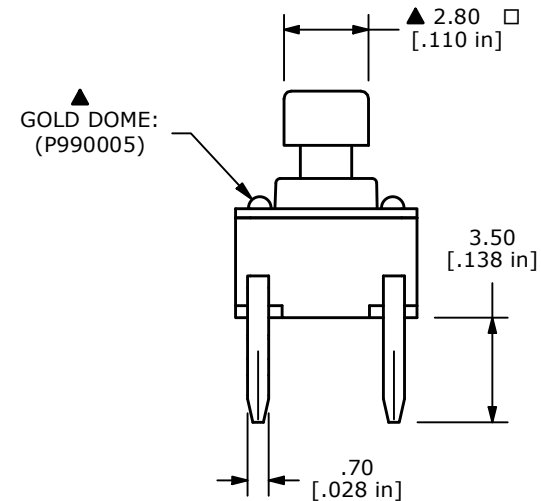
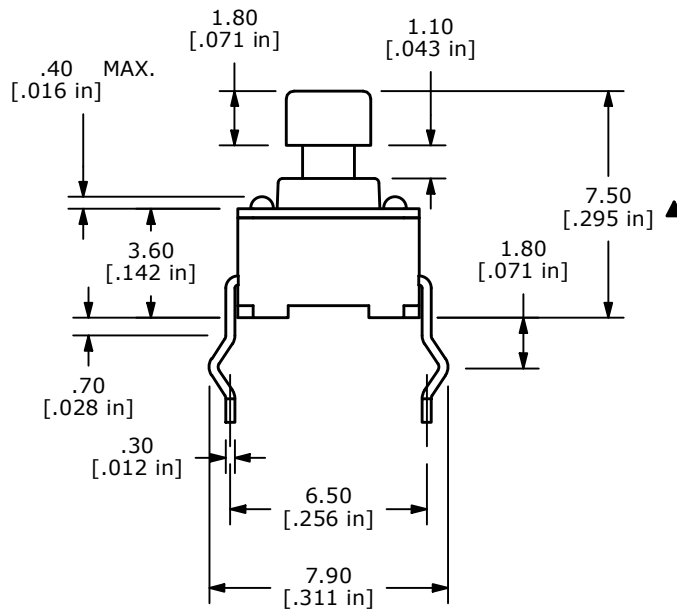

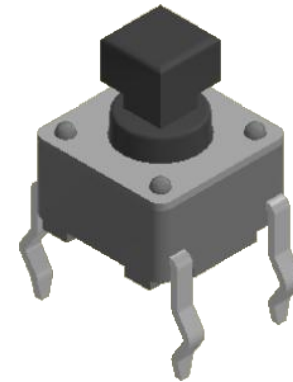
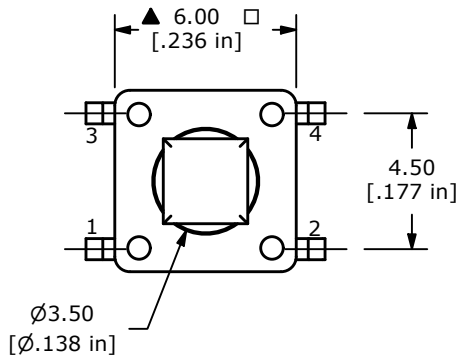


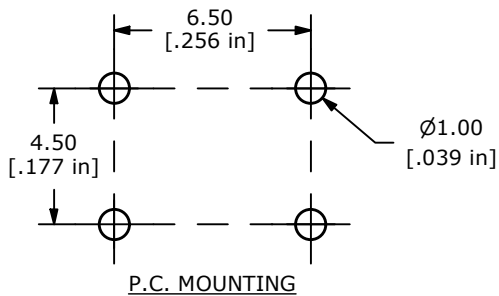

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. TERMINAL NUMBERS FOR REF. ONLY
3. TOLERANCE: X.X=± 0.4
X.XX=± 0.25
4. RATING: 50mA @ 12VDC
5. TRAVEL: 0.25mm +0.2/-0.1mm
- ▲ 6. OPERATING FORCE: 160± 50gf
7. ELECTRICAL LIFE: 100,000 CYCLES MIN.
8. CONTACT RESISTANCE: 100mΩ MAX.
- ▲ 9. CONTACT MATERIAL: GOLD
10. ▲ DENOTES CRITICAL PARAMETER
11. OPERATING TEMP: -40°C TO 85°C

F	24546	CHANGED OPERATING TEMPERATURE	10/19/20	JM
E	16433	CLEANED UP DWG.	9/7/06	BO
D	16090	ADD GOLD DOME NOTE	6/5/06	CT
C	15719	REVISE & REDRAWN (UPDATE NOTES)	1/31/06	PH
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED



E SWITCH®

TITLE	TL1105SPF160R
-------	---------------

SCALE 4:1

DATE 9/7/2006

DR	BO
----	----

DWG	P010204
-----	---------

REV
F