








▲ LED SPECS	UNITS	GREEN
FORWARD CURRENT	mA	20
FORWARD VOLTAGE @ 20mA	V	2.1 typ.-2.5 max.
LUMINOUS INTENSITY @ 20mA	mcd	55 typ.

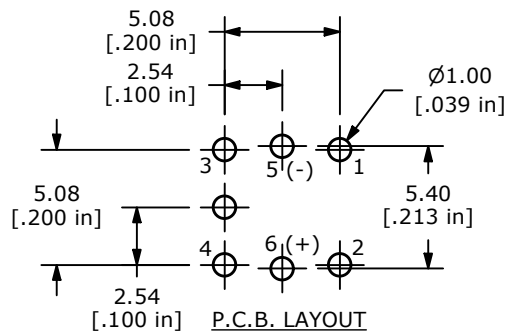

▲ CIRCUIT: SPST

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. RATING: 12VDC @ 50mA
4. CONTACT RESISTANCE: 100 Milli-OHMS MAX.
5. INSULATION RESISTANCE: 100 Mega-OHMS MIN.
- ▲ 6. OPERATING FORCE: 180 $\pm$ 50gf
7. TRAVEL: 0.2 $\pm$ 0.1mm
8. OPERATING TEMPERATURE: -40°C to 85°C
9. OPERATING LIFE: 500,000 CYCLES
- ▲ 10. LED: GREEN
11. ▲ DENOTES CRITICAL PARAMETERS
12. PARTS TO BE PACKAGE 100 PARTS PER TRAY.

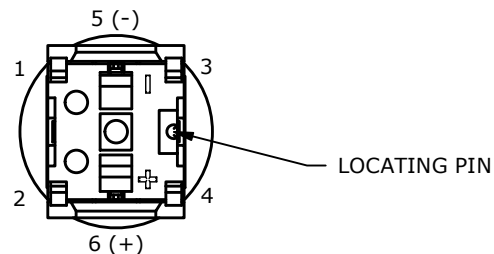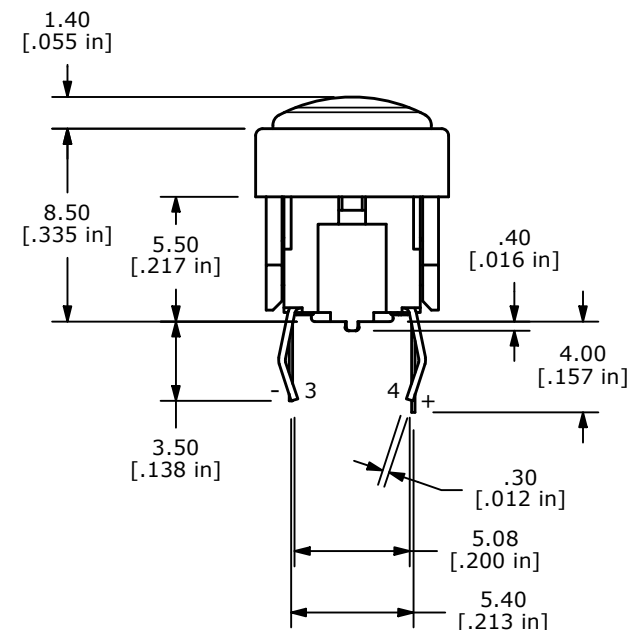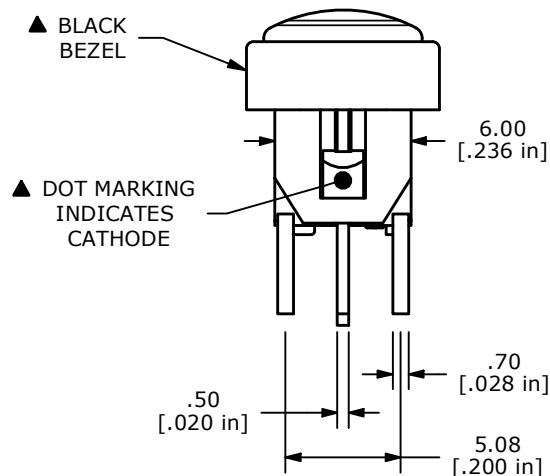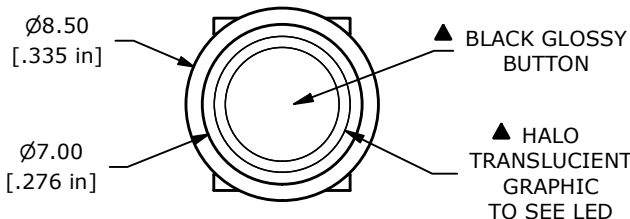

D	24295	update print	5/7/20	MW
C	22934	add Glossy Button as 2nd description	7/20/17	MW
B	22268	UPDATE DRAWING	4/14/16	MW
A	18431	Release for Production	3/4/09	BLR
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED



TITLE TL1220R1BBBG-HALO (Glossy Button)

SCALE 3:1

DATE 3/4/2009

DR BLR

DWG B260007

REV D