

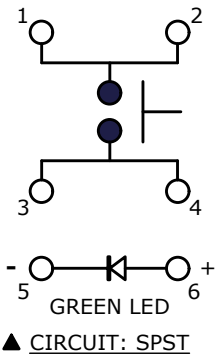
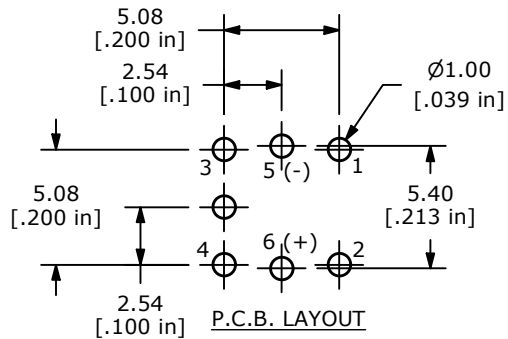
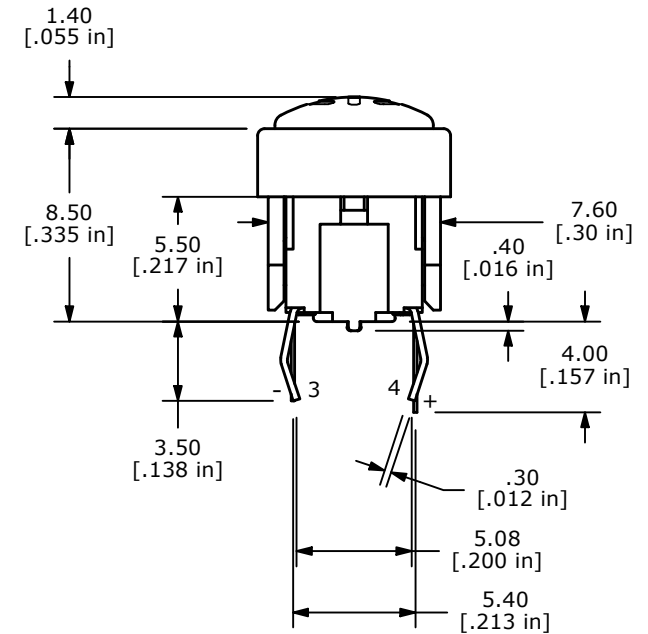

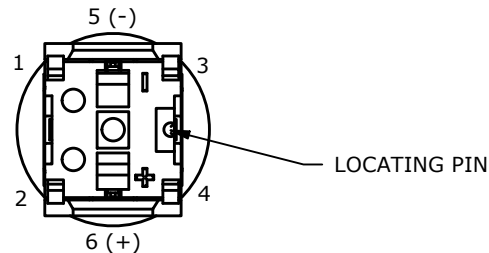


▲ LED SPECS	UNITS	GREEN
FORWARD CURRENT	mA	20
FORWARD VOLTAGE @ 20mA	V	2.1 typ.-2.5 max.
LUMINOUS INTENSITY @ 20mA	mcd	55 typ.

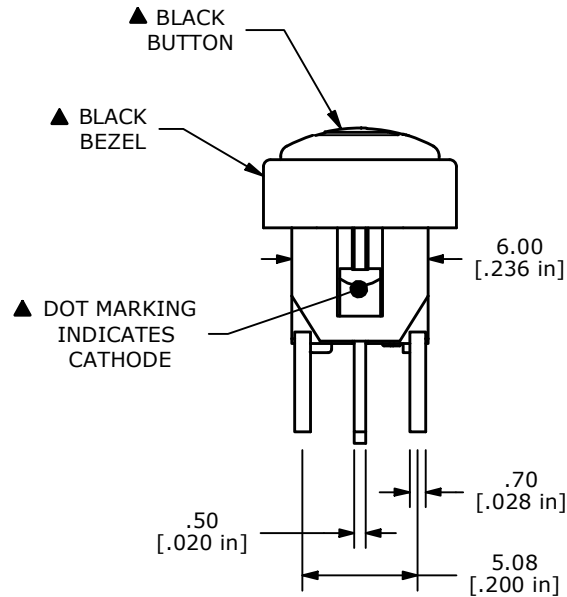

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. RATING: 12VDC @ 50mA
4. CONTACT RESISTANCE: 100 Milli-OHMS MAX.
5. INSULATION RESISTANCE: 100 Mega-OHMS MIN.
- ▲ 6. OPERATING FORCE: 180 $\pm$ 50gf
7. TRAVEL: 0.2 $\pm$ 0.1mm
8. OPERATING TEMPERATURE: -40°C TO 85°C
9. OPERATING LIFE: 500,000 CYCLES
- ▲ 10. LED: GREEN
11. ▲ DENOTES CRITICAL PARAMETERS
12. PARTS TO BE PACKAGE 100 PARTS PER TRAY.

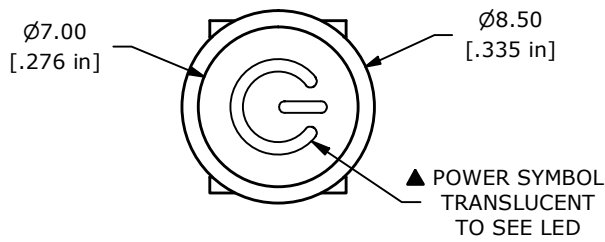

C	24295	update print	5/7/20	MW
B	22131	UPDATE LED SPEC	4/14/16	MW
A	22131	Release for Production	1/29/16	MW
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED



TITLE TL1220R1BBBG-POWER

SCALE 3:1

DATE 1/29/2016

DR MW

DWG B260033

REV C