
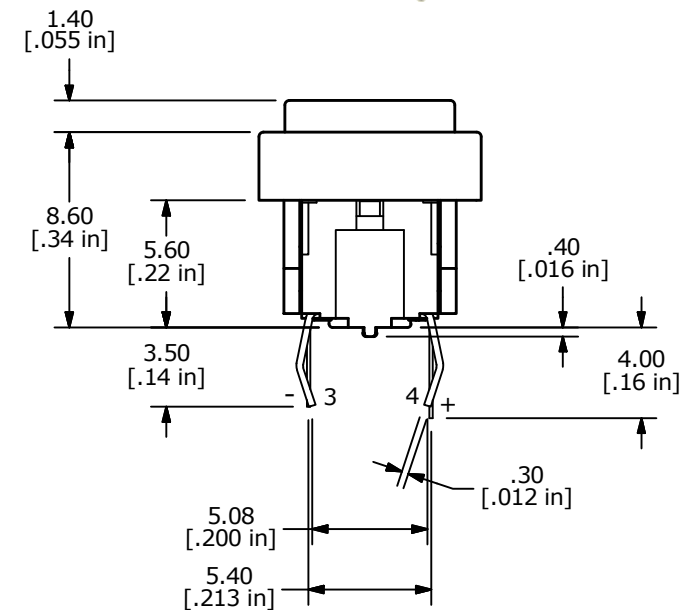
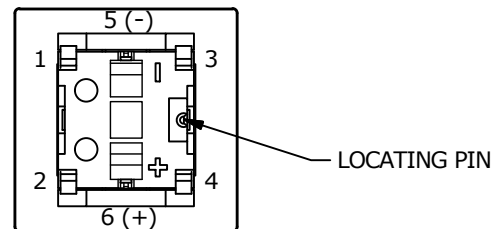


1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. RATING: 12VDC @ 50mA
4. CONTACT RESISTANCE: 100m Ω MAX.
5. INSULATION RESISTANCE: 100M Ω MIN.
- ▲ 6. OPERATING FORCE: 180 $\pm$ 50gf
7. TRAVEL: 0.2 $\pm$ 0.1mm
8. OPERATING TEMPERATURE: -40°C to 85°C
9. OPERATING LIFE: 500,000 CYCLES
- ▲ 10. LED: GREEN
11. ▲ DENOTES CRITICAL PARAMETERS
12. PARTS TO BE PACKAGED 100 PARTS PER TRAY.

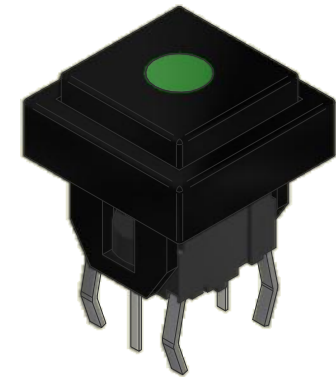

A	24083	New Release	11/1/19	MW
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

TITLE TL1220S1BBBGN				
SCALE 3:1	DATE 11/1/2019	DR MW	DWG B260063	REV A