
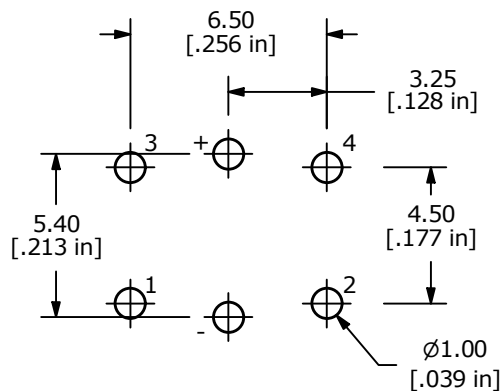
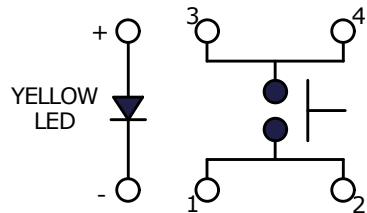
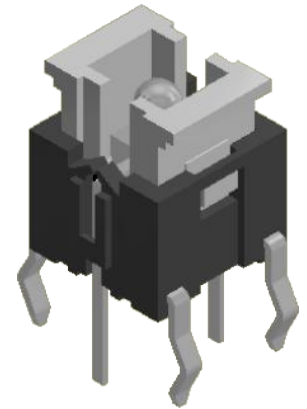



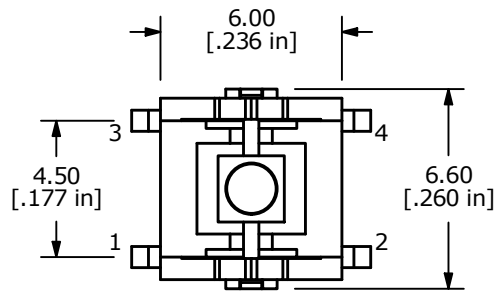


P.C.B. LAYOUT

▲ CIRCUIT: SPST

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. RATING: 50mA @ 12VDC
4. TRAVEL: 0.25 +0.2/0.1mm
- ▲ 5. OPERATING FORCE: 160±50gf
- ▲ 6. CONTACT RESISTANCE: 100 Milli-Ohms Max
- ▲ 7. SHORTER LEAD (WITH COLOR) IS NEGATIVE (CATHODE).
- ▲ 8. LED: YELLOW
9. ▲ DENOTES CRITICAL PARAMETER

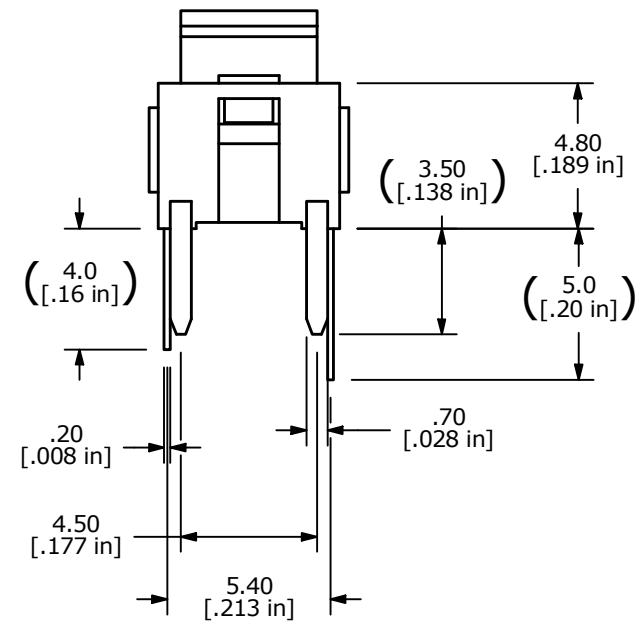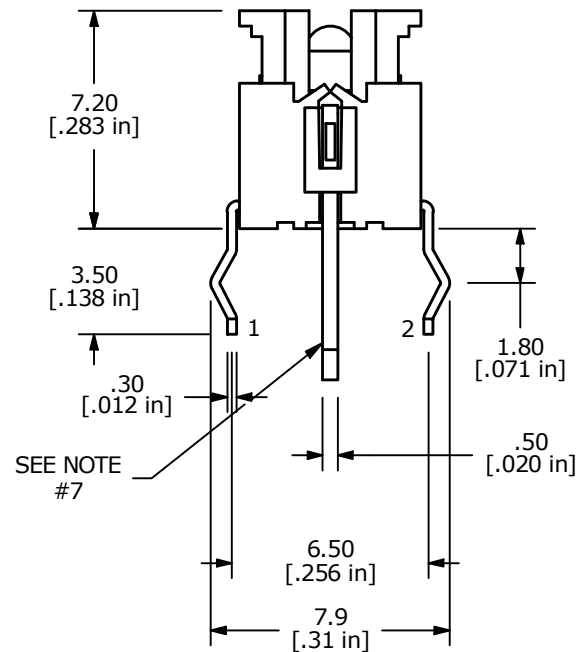

LED SPECS	UNITS	YELLOW
FORWARD CURRENT	mA	10
FORWARD VOLTAGE	V	2.5
LUMINOUS INTENSITY	MCD	60

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®			OBJECT ID
E	ECO-101715	PRINT UPDATE	04/04/23	JS				000017773
					TITLE TL1240YQ			
					SCALE 4:1	DATE 7/20/2001	DR CJB	DWG P010363
								REV E

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED