



SHEET 1 OF 1

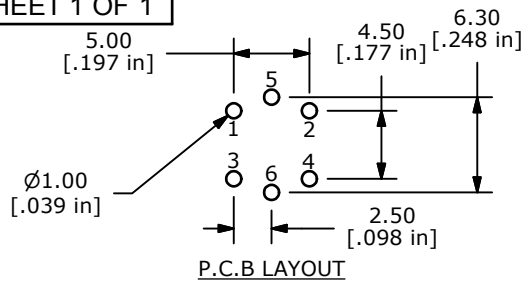




▲ CIRCUIT: SPST

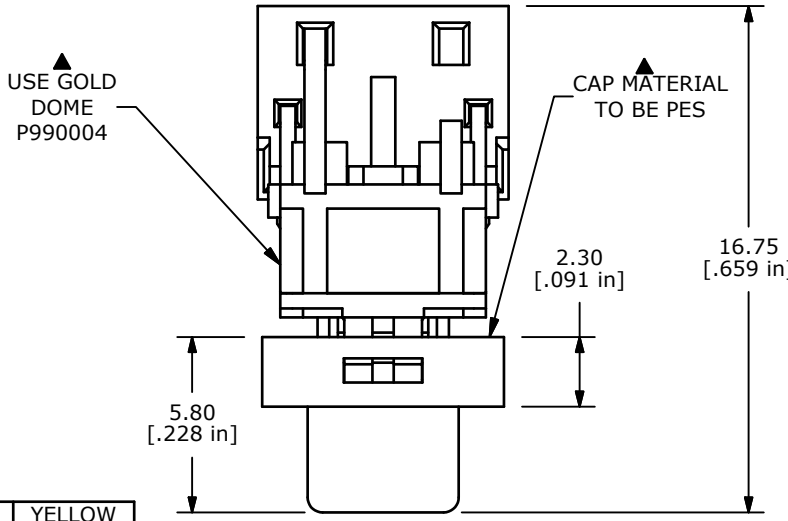


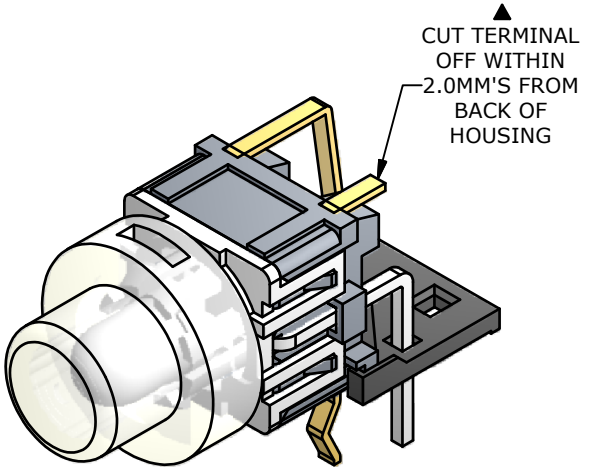

▲LED SPECS	UNITS	GREEN	YELLOW
FORWARD CURRENT	mA	20 NOM	20 NOM
FORWARD VOLTAGE @20mA	V	2.1 TYP 2.5 MAX	2.0 TYP 2.5 MAX
LUMINOUS INTENSITY @ 20mA	mcd	10 MIN 60 TYP	36 MIN 90 TYP

NOTES:
1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
   X.XX=±0.25
3. RATING: 12VDC @ 50mA
4. CONTACT RESISTANCE: 100 Milli-OHMS MAX.
5. INSULATION RESISTANCE: 100 Mega-OHMS MIN.
6. OPERATING FORCE: 280 ± 80gf
7. TRAVEL: 0.2 ± 0.1mm
8. OPERATING TEMPURATURE: -20˚C TO 70˚C
9. OPEREATING LIFE: 50,000 CYCLES
▲ 10. LED: BI-COLOR GREEN-YELLOW
▲ 11. GOLD CONTACTS:
   MOVING CONTACT: 10 MICRO INCHES MIN GOLD.
   STATIONARY CONTACT: 20 MICRO-INCHES MIN GOLD
   EXTERNAL TERMINAL: 10 MICRO-INCHES MIN GOLD
12. ▲ DENOTES CRITICAL PARAMETERS
13. PACKAGING: 100 Pcs. PER TRAY
14. 2002/95/EC (ROHS) COMPLIANT

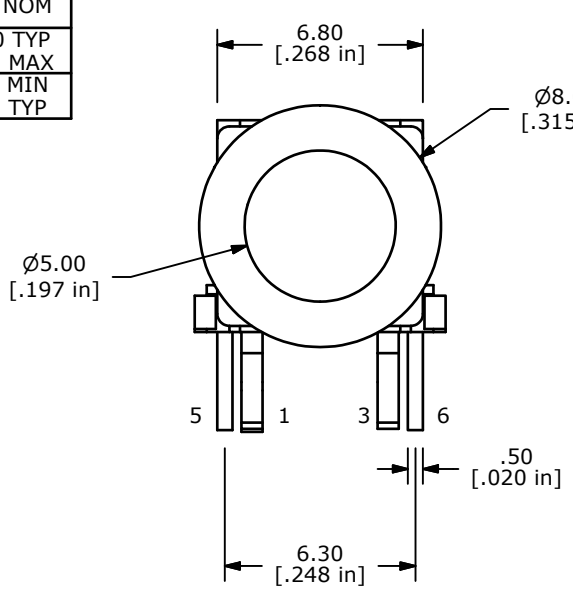

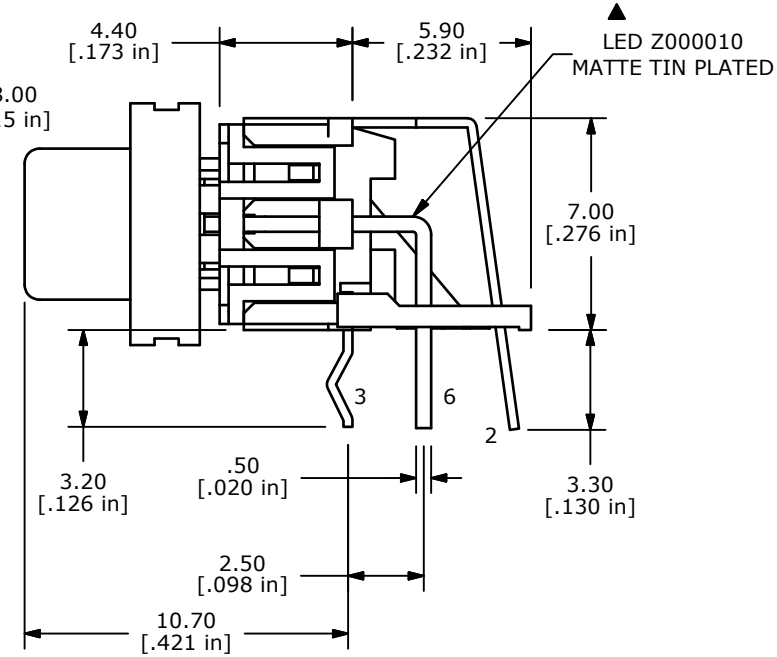

REV	PCR NO	DESCRIPTION	DATE	BY
A	20261	RELEASE FOR PRODUCTION	11/04/11	BMA

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E•SWITCH®

TITLE TL1245F280GYRRCLR

SCALE	DATE	DR	DWG	REV
4 =1	11/4/2011	rc	P010828	A