
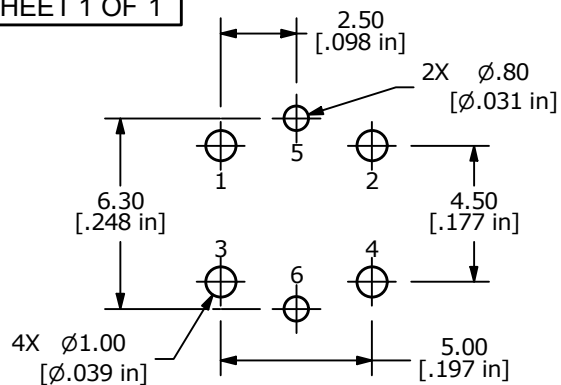
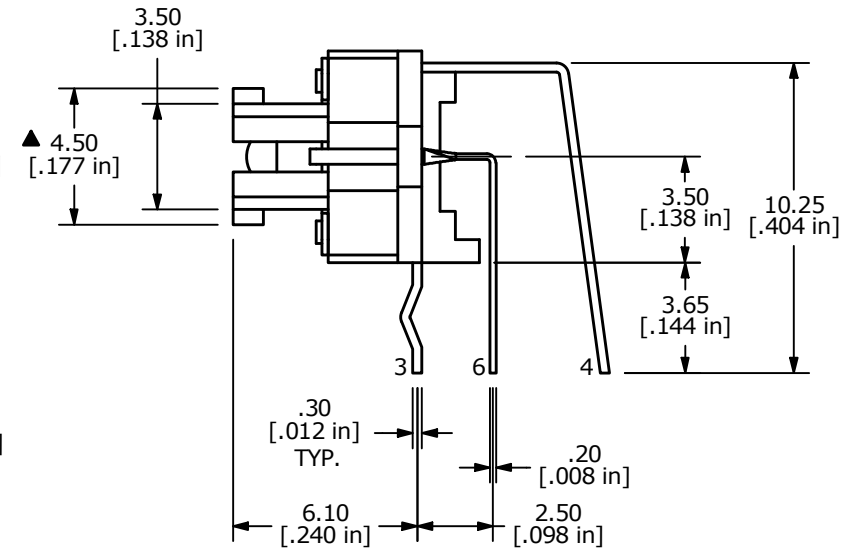
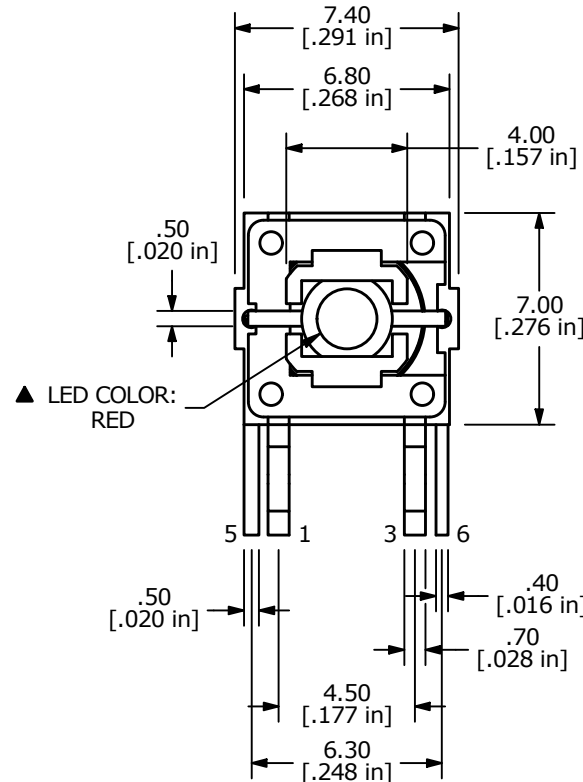


LED SPECS	UNITS	RED
FORWARD CURRENT	mA	30 TYP.
FORWARD VOLTAGE	V	2.0 TYP. - 2.5 MAX.
LUMINOUS INTENSITY	MCD	1800 TYP.

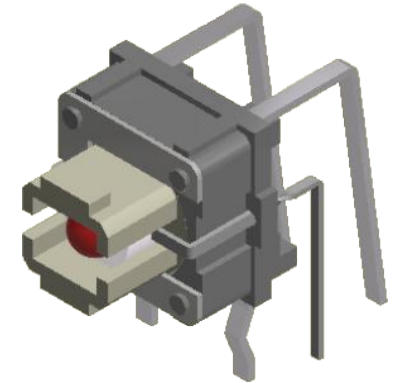

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. RATING: 12VDC @ 50mA
4. CONTACT RESISTANCE: 100m Ω MAX.
5. INSULATION RESISTANCE: 100M Ω MIN.
- ▲ 6. OPERATING FORCE: 160 $\pm$ 50gf
7. TRAVEL: 0.2 $\pm$ 0.1mm
8. OPERATING TEMPERATURE: -20°C to 70°C
9. OPERATING LIFE 500,000 CYCLES
- ▲ 10. LED COLOR: RED
11. ▲ DENOTED CRITICAL PARAMETER
12. PACKAGE: 100 PIECES PER TRAY

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
A	ECO-101088	RELEASE	07/05/22	JS	TITLE TL1260RQNOCAP				100122293
					SCALE	DATE	DR	DWG	REV
					4:1	6/30/2022	JS	B200063	A

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED