

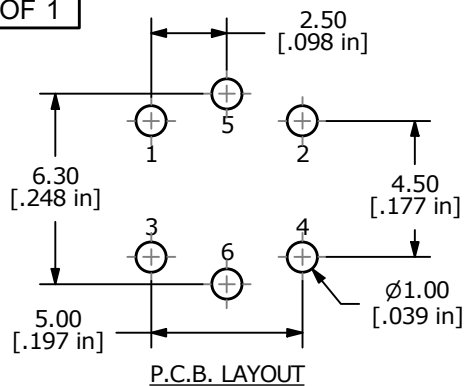
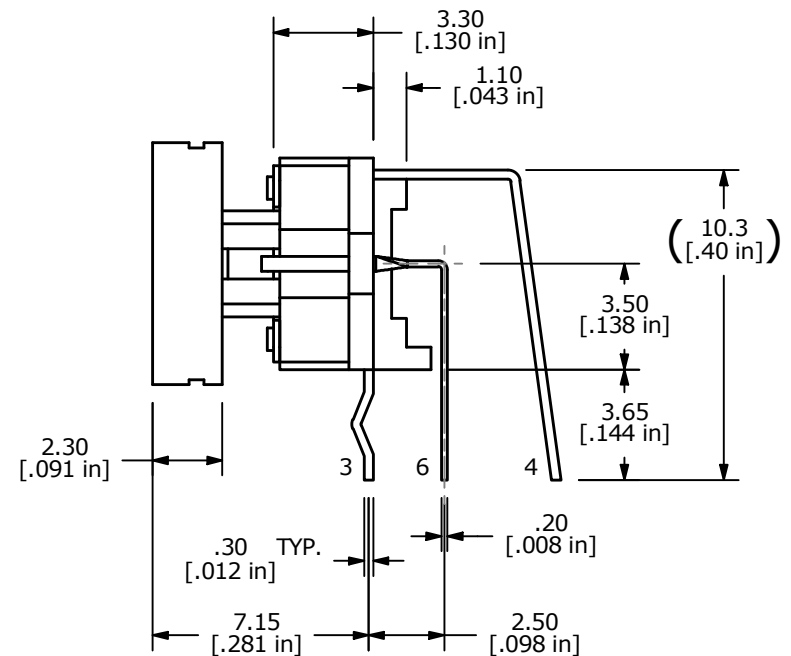
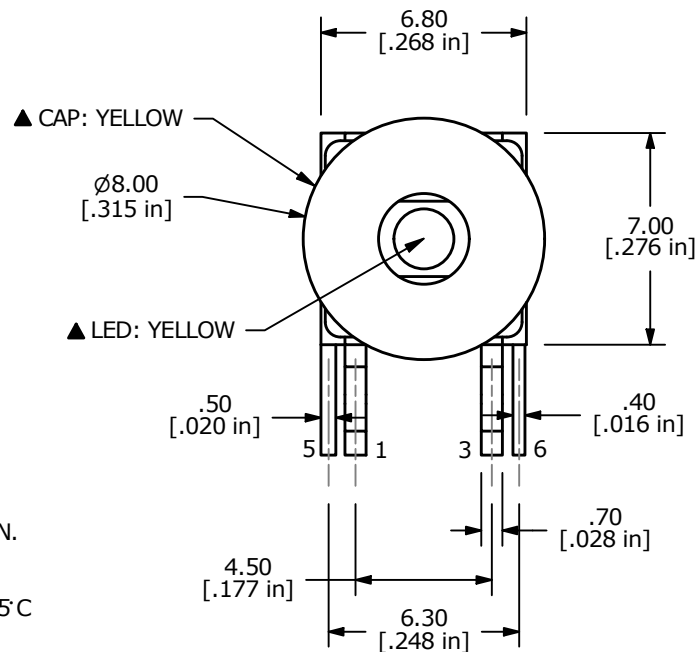




LED SPECS	UNITS	ULTRA YELLOW
FORWARD CURRENT	mA	20 TYP.
FORWARD VOLTAGE	V	2.0 TYP. - 2.5 MAX.
LUMINOUS INTENSITY	MCD	1800 TYP.

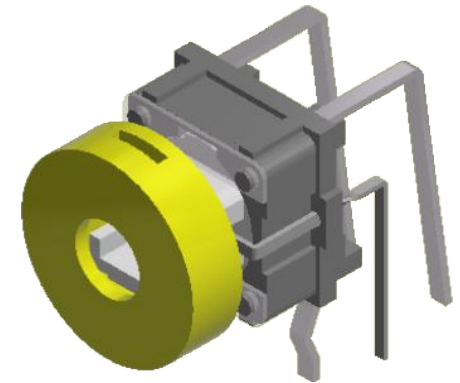

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. RATING: 12VDC @ 50mA
4. CONTACT RESISTANCE: 100m Ω MAX.
5. INSULATION RESISTANCE: 100M Ω MIN.
- ▲ 6. OPERATING FORCE: 160 $\pm$ 50gf
7. TRAVEL: 0.2 $\pm$ 0.1mm
8. OPERATING TEMPERATURE: -40°C to 85°C
9. OPERATING LIFE: 500,000 CYCLES
- ▲ 10. LED: ULTRA YELLOW
11. ▲ DENOTES CRITICAL PARAMETERS
12. PACKAGING: 100 PIECES PER TRAY

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
F	ECO-101964	DIM 7.15 WAS 6.85	05/24/23	JS	TITLE TL1260YQRYEL				000006462
					SCALE	DATE	DR	DWG	REV
					4:1	5/11/2007	TN	B200005	F

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED