



▲ CIRCUIT: SPST



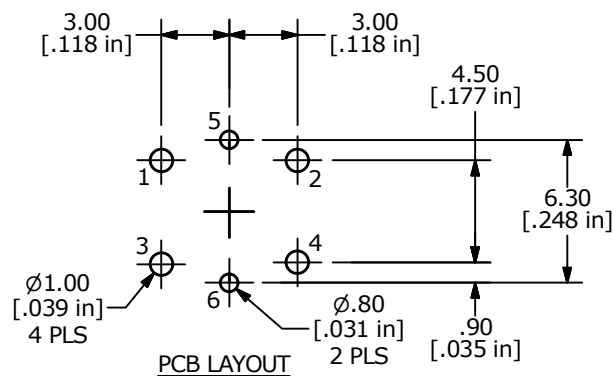


NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. RATING: 50mA, 12VDC
- ▲ 4. TRAVEL: 0.2 ± 0.1
5. OPERATING FORCE: $160 \pm 50\text{gf}$
6. CONTACT RESISTANCE: 100m-Ohms MAX
7. CONTACT MATERIAL: SILVER
8. OPERATING LIFE: 500,000 CYCLES
9. INSULATION RESISTANCE: 100M-Ohms MIN
10. DIELECTRIC STRENGTH: 500VDC FOR 1 MINUTE
- ▲ 11. LED COLOR: BLUE
12. OPERATING TEMPERATURE: -40°C to 85°C
13. 2002/95/EC (ROHS) COMPLIANT
14. ▲ DENOTES CRITICAL PARAMETER



▲ LED COLOR
BLUE

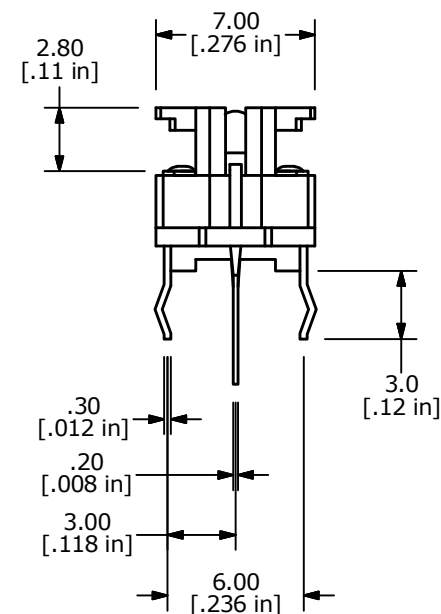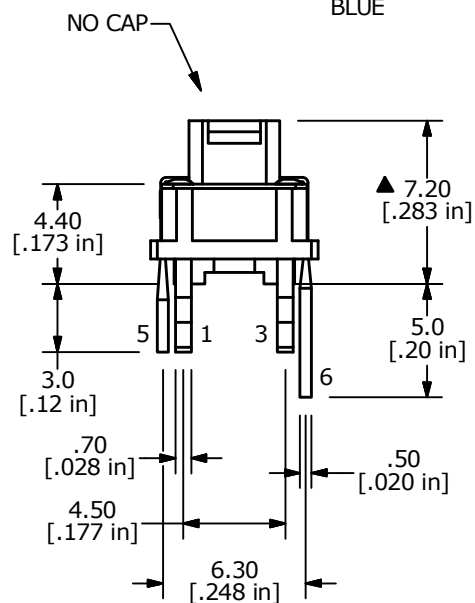

▲ LED SPECS	UNITS	BLUE LED
FORWARD CURRENT	mA	5
FORWARD VOLTAGE	V	2.9 TYP. - 4.0 MAX
LUMINOUS INTENSITY	mcd	150 TYP.



A	22217	Release for Production	3/29/16	MW
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

TITLE TL1265BQN				
SCALE 3:1	DATE 3/24/2016	DR MW	DWG B200040	REV A