




▲ CIRCUIT: SPSTPCB LAYOUT

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. RATING: 50mA, 12VDC
- ▲ 4. TRAVEL: 0.2 ± 0.1
5. OPERATING FORCE: 160 ± 50 gf
6. CONTACT RESISTANCE: 100m-Ohms MAX
7. CONTACT MATERIAL: SILVER
8. OPERATING LIFE: 500,000 CYCLES
9. INSULATION RESISTANCE: 100M-Ohms MIN
10. DIELECTRIC STRENGTH: 500VAC FOR 1 MINUTE
- ▲ 11. LED COLOR: WHITE
12. OPERATING TEMPERATURE: -40°C to 85°C
13. 2011/65/EU (ROHS) COMPLIANT
14. ▲ DENOTES CRITICAL PARAMETER

▲ LED COLOR
WHITE

NO CAP

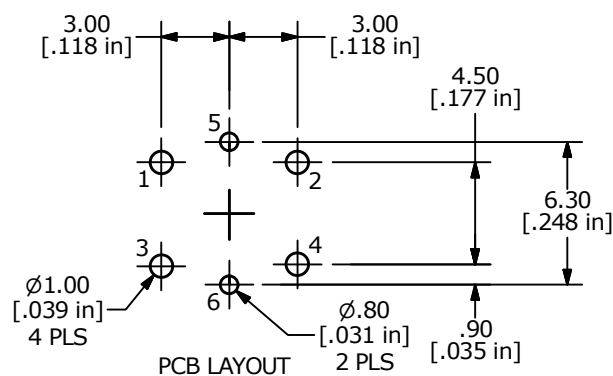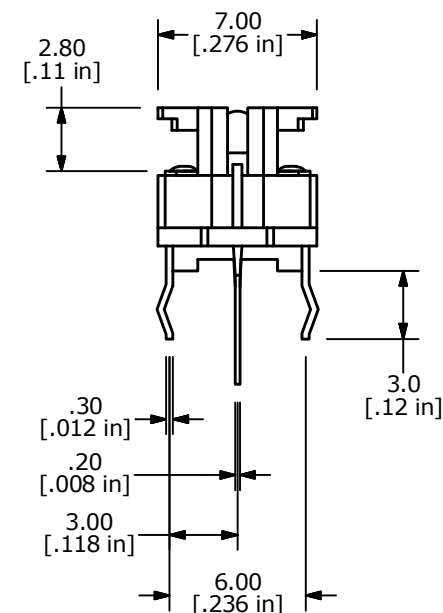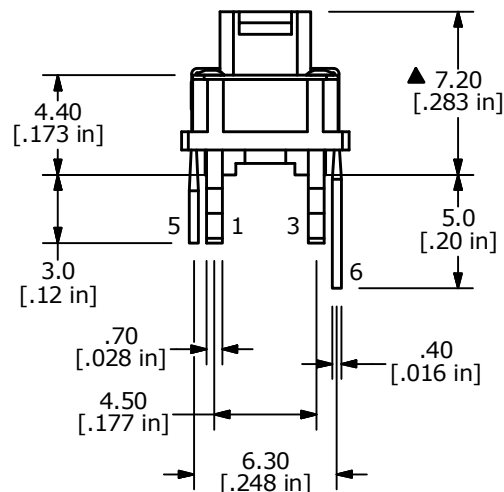

▲ LED SPECS	UNITS	WHITE LED
FORWARD CURRENT	mA	20
FORWARD VOLTAGE	V	3.2 TYP. - 4.0 MAX
LUMINOUS INTENSITY	mcd	150



E-SWITCH®

TITLE TL1265WQN

SCALE
3:1DATE
7/29/2016DR
MWDWG
B200041REV
A

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

A	22416	Release for Production	8/2/16	MW
REV	PCR NO	DESCRIPTION	DATE	BY