



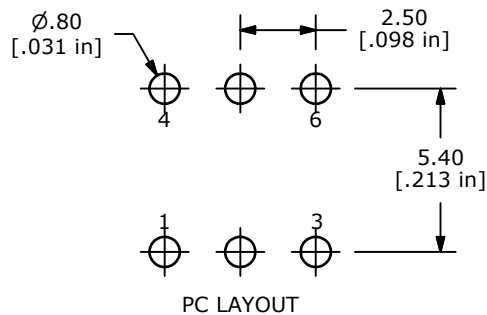




SWITCH FUNCTION	
POS. 1	POS. 2
ON	ON
2-1, 5-4	2-3, 5-6




▲ CIRCUIT DIAGRAM (DPDT)
MAKE BEFORE BREAK

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X $\pm$ 0.4
X.XX $\pm$ 0.25
3. TERMINAL NUMBERS FOR REF. ONLY
- ▲ 4. RATING: 0.1A @ 30VDC
5. TRAVEL: FULL = 2.5, LOCK = 1.5
6. OPERATING FORCE: 220 $\pm$ 50gf
7. ELECTRICAL LIFE: 10,000 CYCLES
8. ▲ DENOTES CRITICAL PARAMETER
9. CONTACT MATERIAL: SILVER
10. 2002/95/EC (RoHS) COMPLIANT

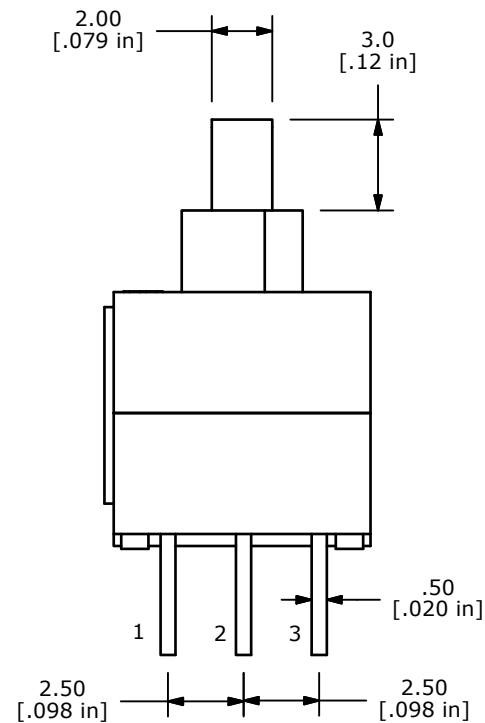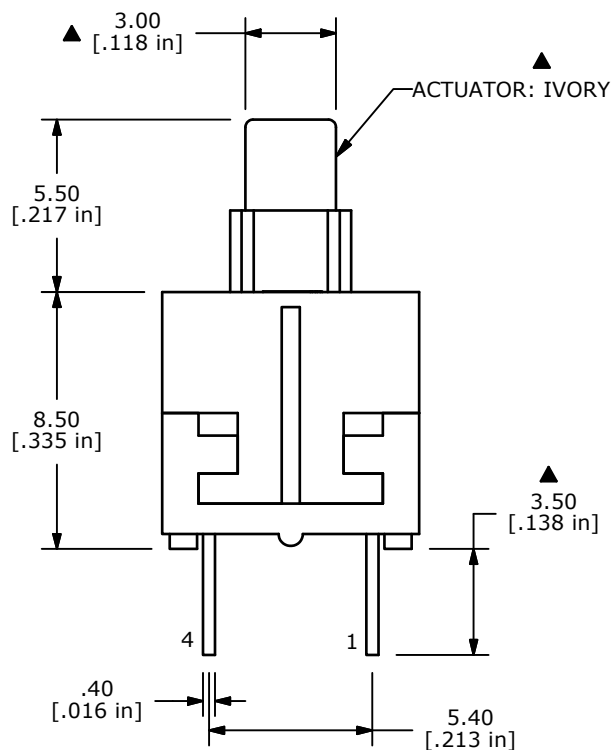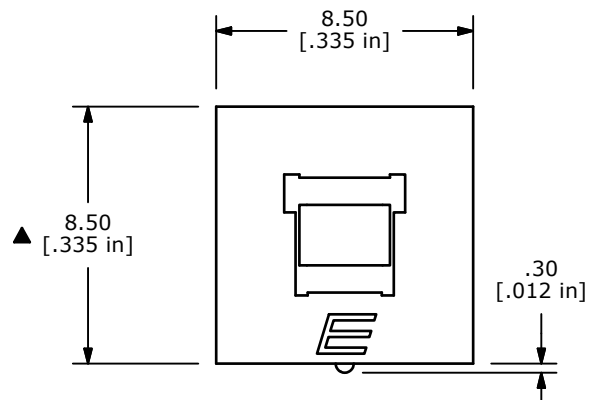

ISOMETRIC

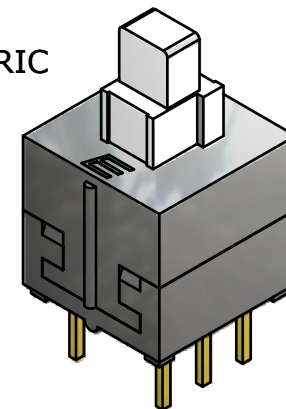

B	19719	CHANGED TERMINAL NUMBERS	2/25/11	BGL
A	17968	RELEASE FOR PRODUCTION	2/22/08	BLR
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

TITLE TL2202EEEXA

SCALE 2:1

DATE 2/22/2008

DR BLR

DWG P010394

REV B