

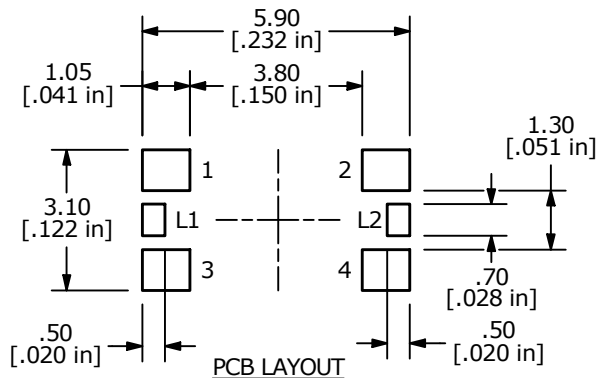
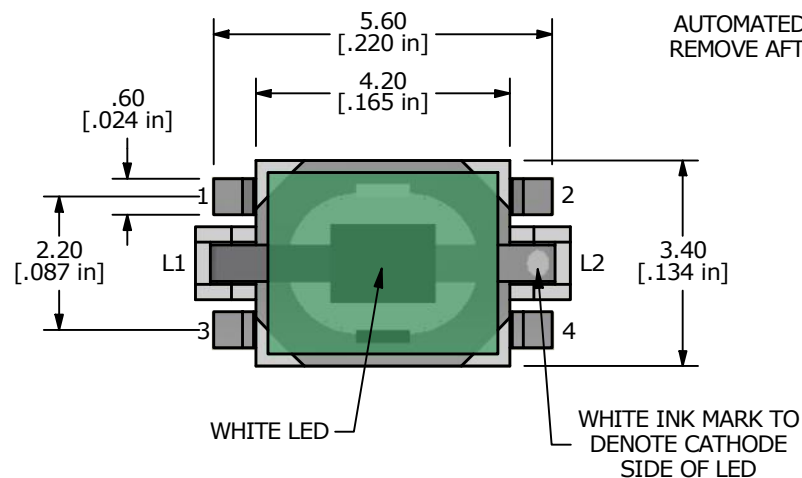
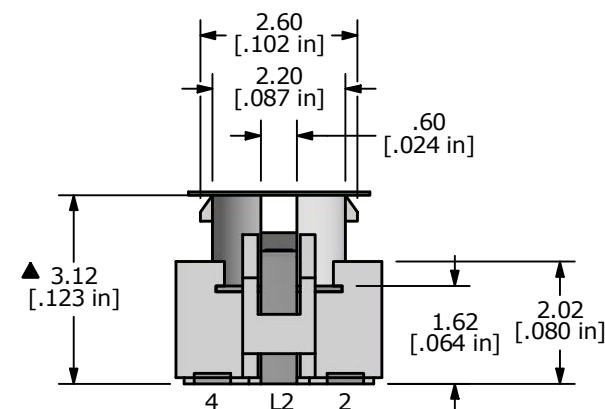


NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. RATING: 12VDC, 50mA MAX.
4. CONTACT RESISTANCE: 500m Ω MAX.
5. INSULATION RESISTANCE: 100M Ω MIN. @ 100VDC
6. TRAVEL: 0.2 ± 0.1 mm
7. DIELECTRIC STRENGTH: 250V AC FOR 1 MIN.
- ▲ 8. OPERATING FORCE: 160 ± 50 gf
9. OPERATING TEMPERATURE: -20°C to 70°C
10. OPERATING LIFE: 100,000 CYCLES.
11. PACKAGING: TAPE & REEL, 2000 PIECES PER REEL
12. ▲ DENOTES CRITICAL PARAMETER

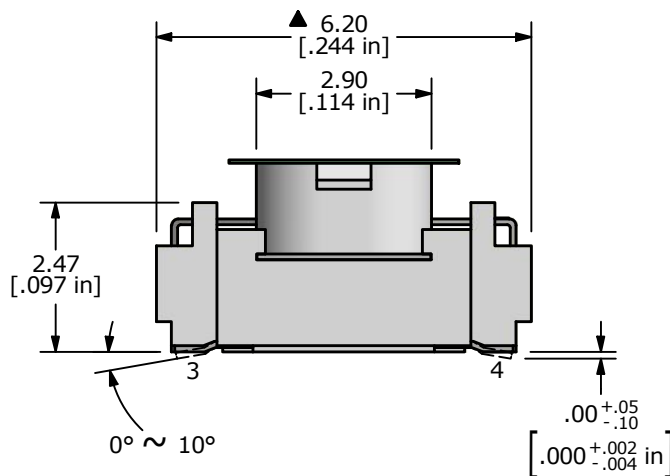

AUTOMATED PICKUP TAPE:
REMOVE AFTER SOLDERING

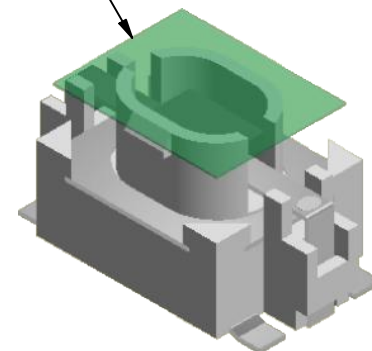

▲ LED SPECS	UNITS	WHITE
FORWARD CURRENT	mA	20
FORWARD VOLTAGE	V	2.8 MIN. - 4.0 MAX
LUMINOUS INTENSITY	mcd	450 TYP

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
E	ECO-100577	moved LED color markings to top view	01/13/22	MW	TITLE TL3210AF160WQ				000006552
					SCALE	DATE	DR	DWG	REV
					8:1	5/3/2012	rc	B200304	E

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO
E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED