

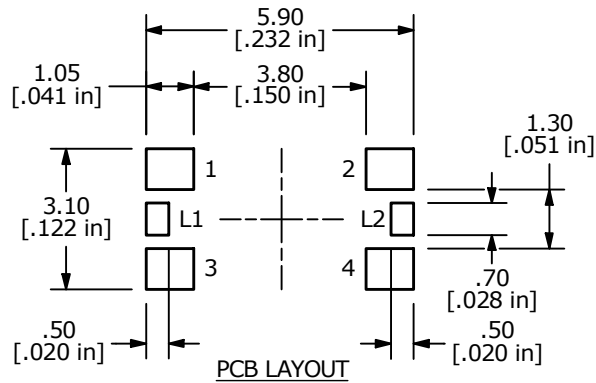
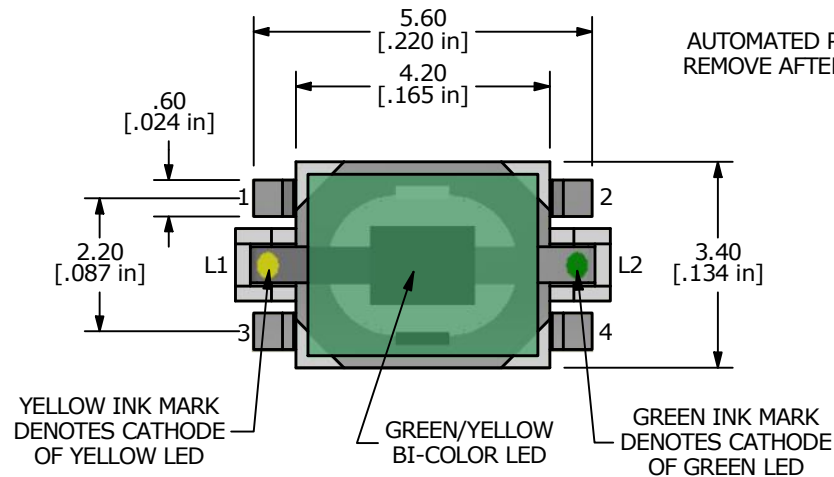


NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. RATING: 12VDC, 50mA MAX.
4. CONTACT RESISTANCE: 500m Ω MAX.
5. INSULATION RESISTANCE: 100M Ω MIN. @ 100VDC
6. TRAVEL: 0.2 $\pm$ 0.1 mm
7. DIELECTRIC STRENGTH: 250V AC FOR 1 MIN.
- ▲ 8. OPERATING FORCE: 160 $\pm$ 50gf
9. OPERATING TEMPERATURE: -20°C to 70°C
10. OPERATING LIFE: 100,000 CYCLES.
11. PACKAGING: TAPE & REEL, 2000 PIECES PER REEL
12. ▲ DENOTES CRITICAL PARAMETER

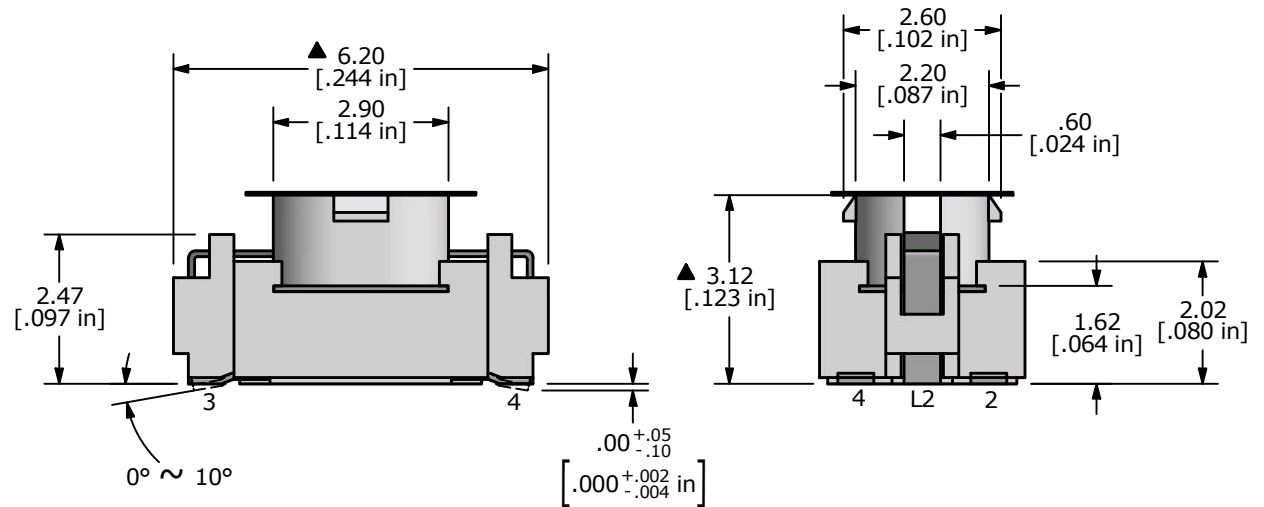

AUTOMATED PICKUP TAPE:
REMOVE AFTER SOLDERING

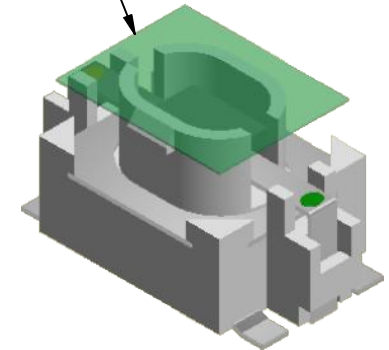

LED SPECS	UNITS	GREEN	YELLOW
FORWARD CURRENT	mA	20	20
FORWARD VOLTAGE	V	2.1 TYP - 2.5 MAX	2.0 TYP - 2.5 MAX
LUMINOUS INTENSITY	mcd	60	180
PEAK WAVELENGTH	nm	574	590

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
C	ECO-100577	moved LED color markings to top view	01/13/22	MW	TITLE TL3210AF160ZQ				000006554
					SCALE 8:1	DATE 4/25/2012	DR EBP	DWG B200306	REV C

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO
E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED