
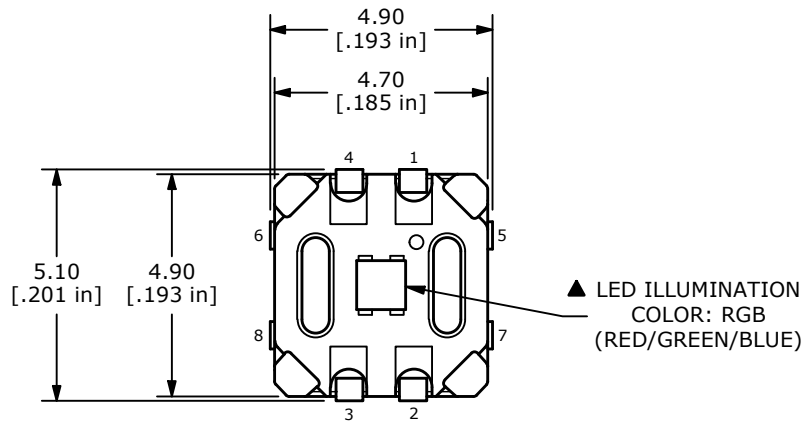
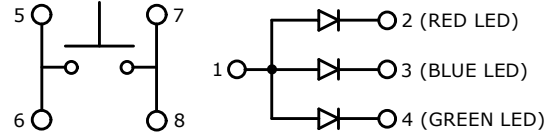
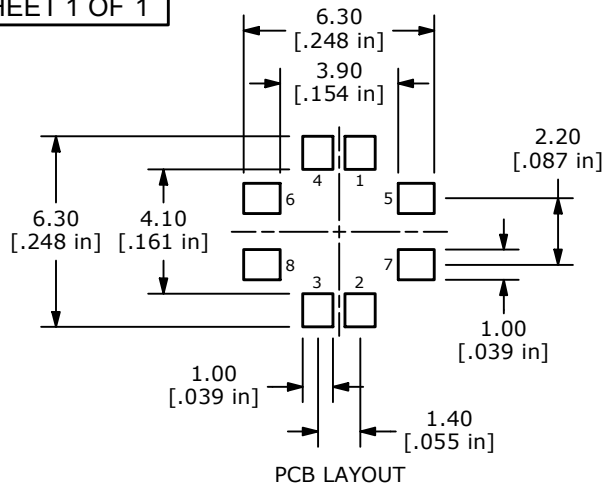
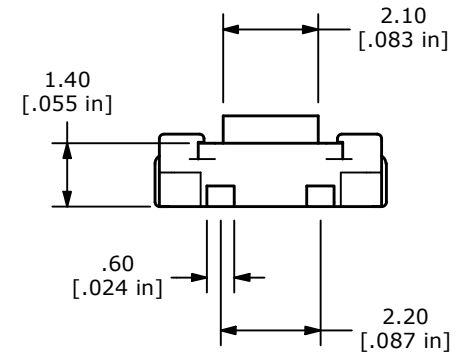


NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. TERM. NOS. FOR REFERENCE ONLY.
4. RATING: 12VDC 50mA Max.
5. CONTACT MATERIAL: GOLD FLASH
6. ELECTRICAL LIFE: 100,000 CYCLES
7. CONTACT RESISTANCE: 500m Ω MAX.
8. DIELECTRIC STRENGTH: 250VAC FOR 1 MIN.
9. TRAVEL: 0.20 ± 0.10 mm
10. OPERATING FORCE: 160 ± 50 gf
11. OPERATING TEMPERATURE: -40° to +85°C
12. ▲ DENOTES CRITICAL PARAMETER
- ▲ 13. ILLUMINATION VOLTAGE: RED: 1.3-2.3V @ 2mA
GREEN: 2.3-3.1V @ 2mA
BLUE: 2.2-3.0V @ 2mA

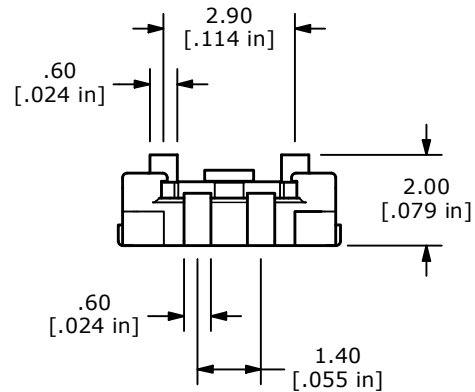

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
A	ECO-103430	Release	05/21/25	MW	TITLE TL3220AF160RGBR				100130232
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED					SCALE	DATE	DR	DWG	REV
					6:1	5/19/2025	MW	B322001	A