


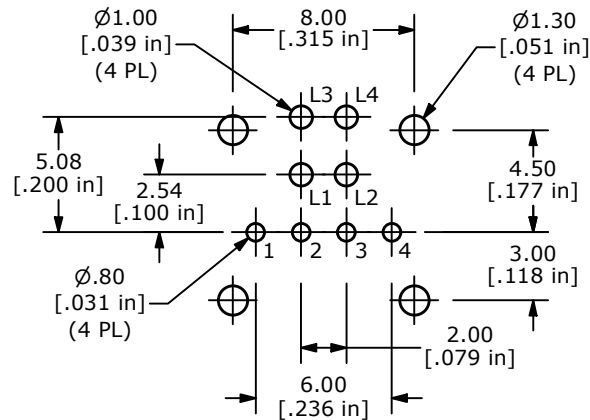
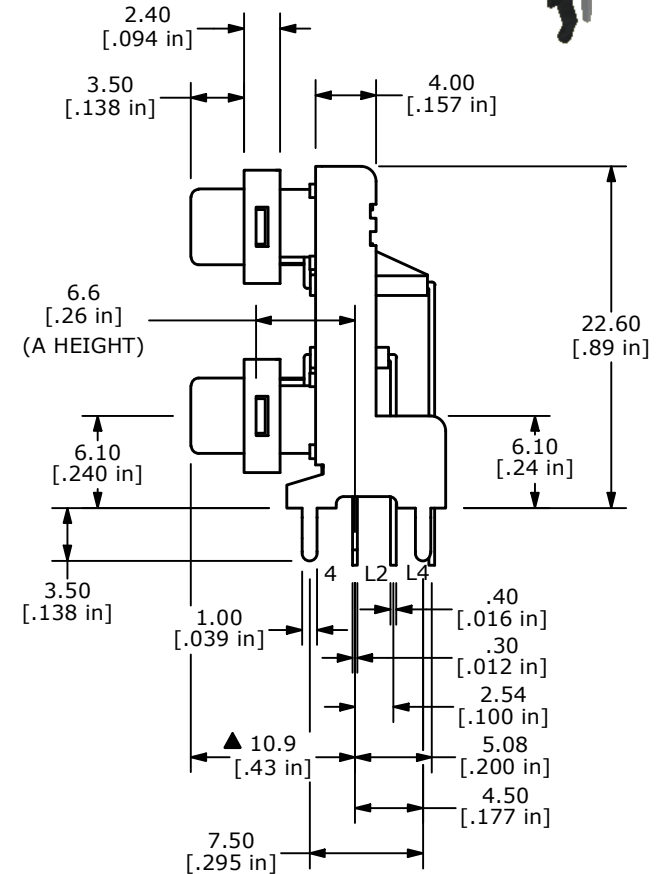
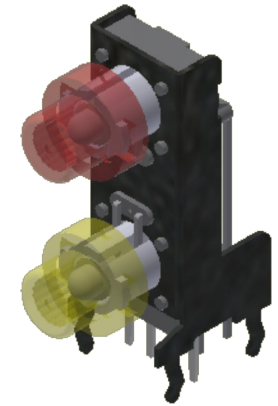


LED SPECS	UNITS	RED	YELLOW
FORWARD CURRENT	mA	20	20
FORWARD VOLTAGE	V	1.95 TYP - 2.5 MAX	2.0 TYP - 2.5 MAX
LUMINOUS INTENSITY	mcd	4000 TYP	2700 TYP

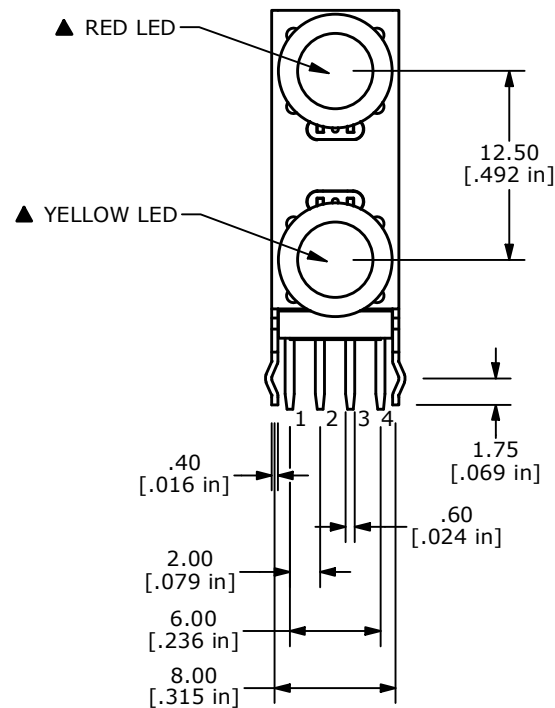

NOTES:

- ALL DIMENSIONS IN MM
- GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
- TERM. NOS. FOR REFERENCE ONLY.
- CONTACT RATING: 50mA @12VDC
- TRAVEL: 0.25 ± 0.1 mm
- CONTACT RESISTANCE: 100 Milli-Ohms Max.
- OPERATING FORCE: 160 ± 50 gf
- CONTACT MATERIAL: SILVER
- MECHANICAL LIFE: 500,000 CYCLES
- OPERATING TEMP: -40°C to 85°C
- ▲ DENOTES CRITICAL PARAMETER.
- PACKAGE: TRAY

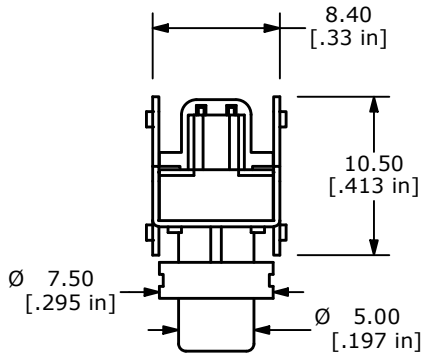

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
B	ECO-102232	NOTE 12 REMOVE PACKAGE QUANTITY	09/13/23	JS	TITLE TL3253ARAAAYAF160Q				000006194
					SCALE	DATE	DR	DWG	REV
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED					2:1	12/29/2016	MW	B060014	B