



LED SPECS	UNITS	GREEN	GREEN
FORWARD CURRENT	mA	20	20
FORWARD VOLTAGE	V	2.1 TYP - 2.5 MAX	2.1 TYP - 2.5 MAX
LUMINOUS INTENSITY	mcd	300 typ	300 typ

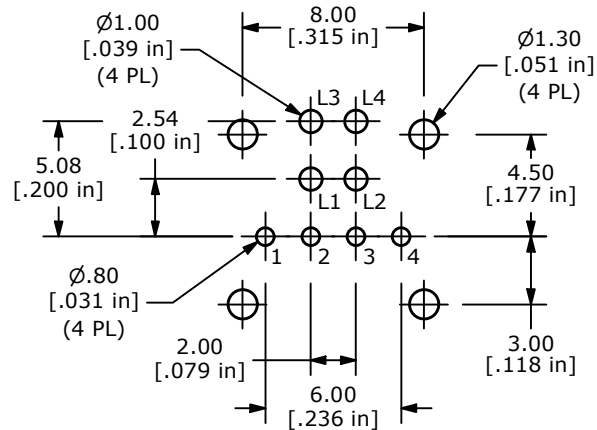





RECOMMENDED PCB LAYOUT



CIRCUIT DIAGRAM

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. TERM. NOS. FOR REFERENCE ONLY.
4. CONTACT RATING: 50mA @12VDC
5. TRAVEL: 0.25 ± 0.1 mm
6. CONTACT RESISTANCE: 100 Milli-Ohms Max.
7. OPERATING FORCE: 160 ± 50 gf
8. CONTACT MATERIAL: SILVER
9. MECHANICAL LIFE: 500,000 CYCLES
10. OPERATING TEMP: -40°C to 85°C
11. ▲ DENOTES CRITICAL PARAMETER.
12. PACKAGE: TRAY

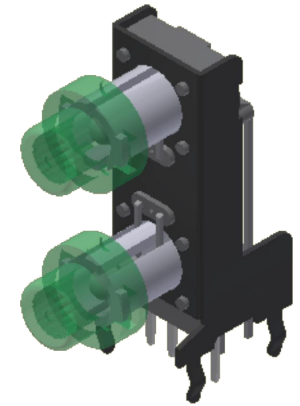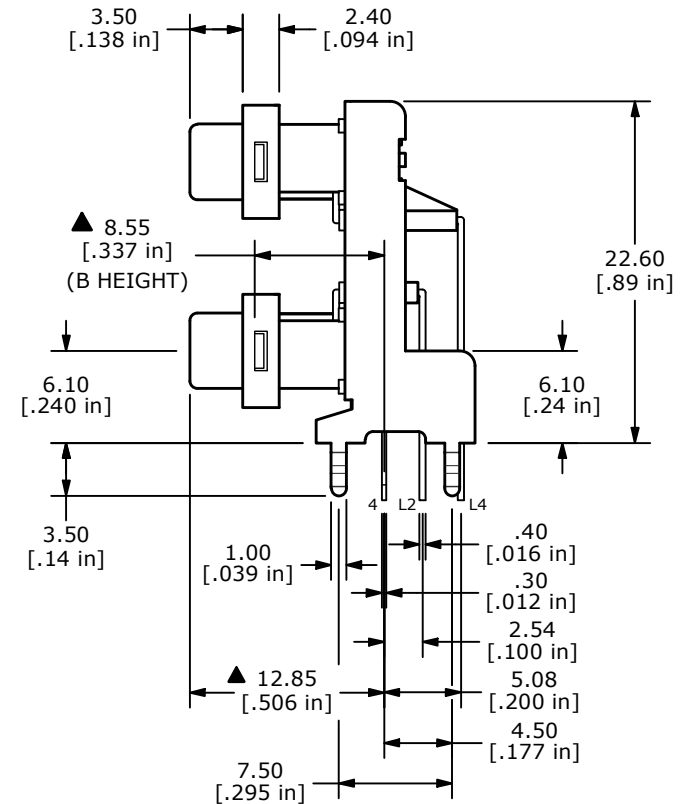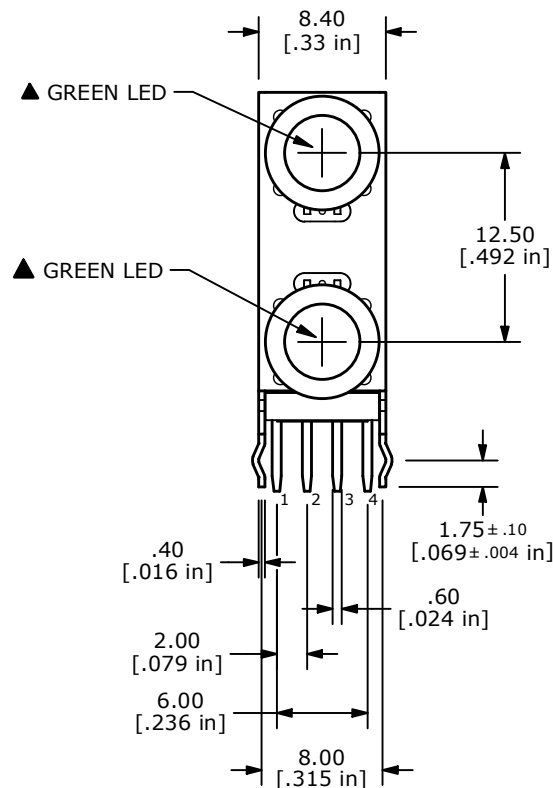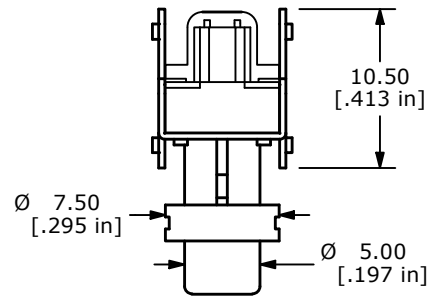

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
B	ECO-102232	NOTE 12 REMOVE PACKAGE QUANTITY	09/13/23	JS	TITLE TL3253BGABGAF160Q				000006200
					SCALE	DATE	DR	DWG	REV
					2:1	3/10/2020	MW	B060020	B

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED