



LED SPECS	UNITS	RED	WHITE
FORWARD CURRENT	mA	20	20
FORWARD VOLTAGE	V	1.95 TYP - 2.5 MAX	3.3 TYP - 4.0 MAX
LUMINOUS INTENSITY	mcd	4000 TYP	650 TYP

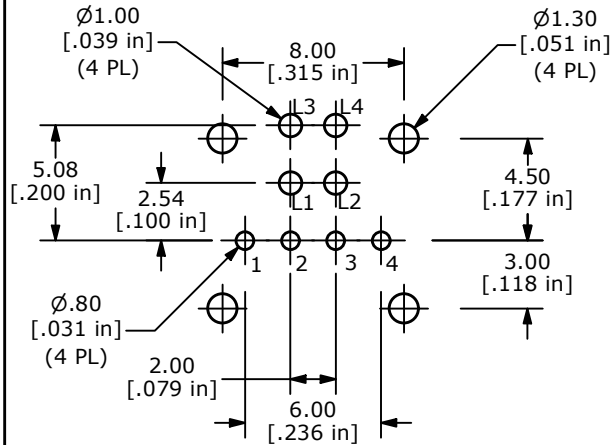



RECOMMENDED PCB LAYOUT



▲CIRCUIT DIAGRAM

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REFERENCE ONLY.
4. CONTACT RATING: 50mA @12VDC
5. TRAVEL: 0.25 ±0.1mm
6. CONTACT RESISTANCE: 100 Milli-Ohms Max.
7. OPERATING FORCE: 160 ± 50gf
- ▲8. CONTACT MATERIAL: SILVER
9. MECHANICAL LIFE: 500,000 CYCLES
10. OPERATING TEMP: -20°C TO 70°C
11. ▲DENOTES CRITICAL PARAMETER.
- ▲12. PACKAGE: TRAY

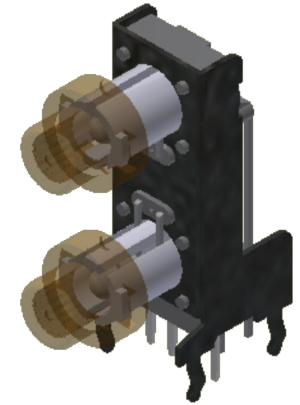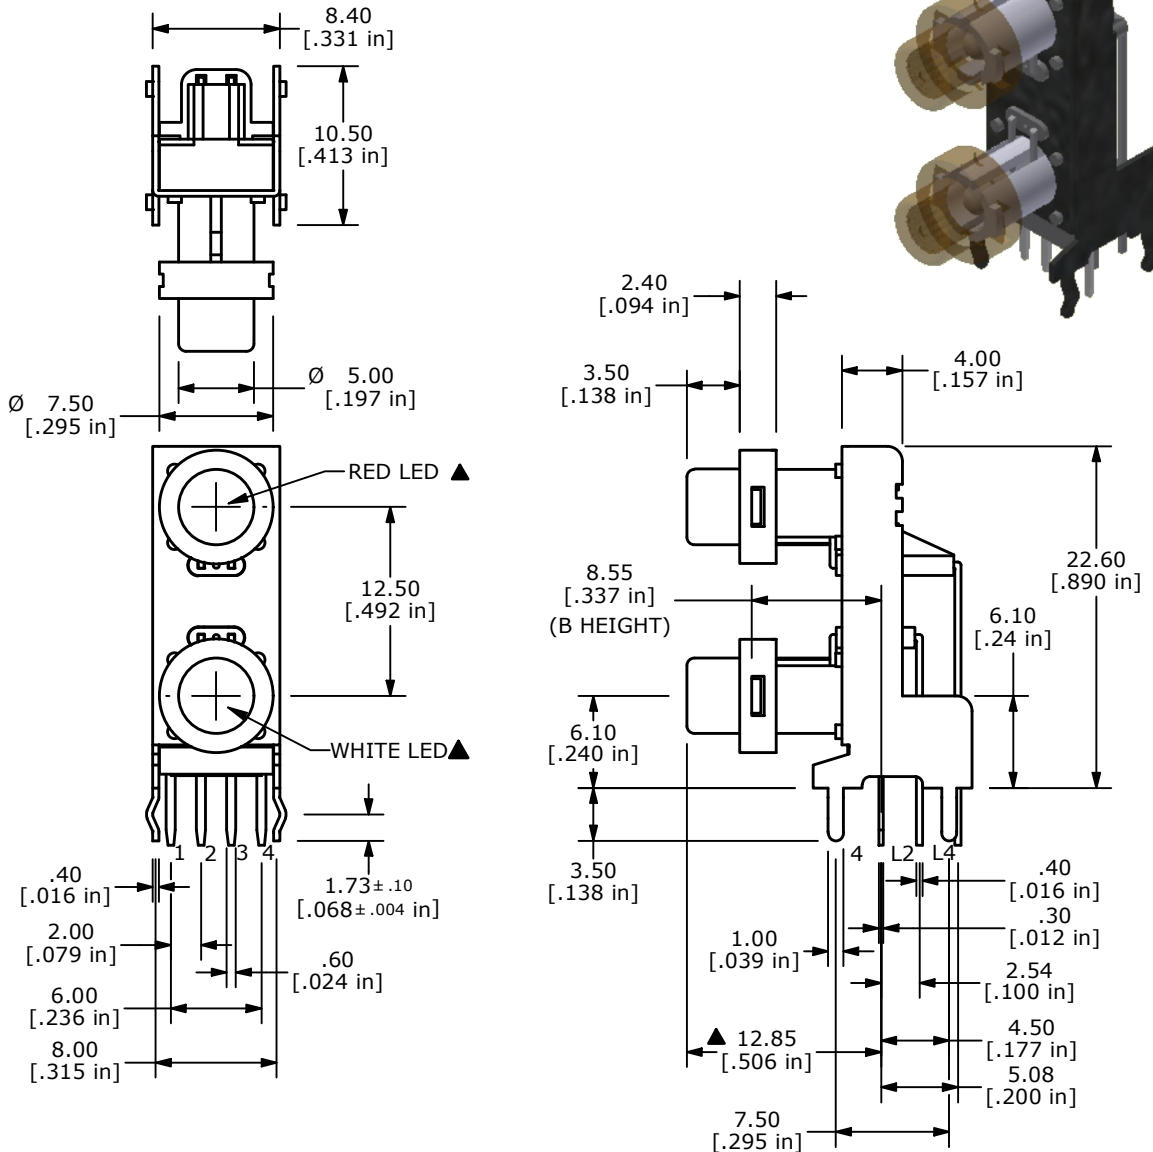

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
B	ECO-102232	NOTE 12 REMOVE PACKAGE QUANTITY	09/13/23	JS	TITLE TL3253BRABWAF160Q				000006188
					SCALE	DATE	DR	DWG	REV
					2:1	11/8/2012	EBP	B060008	B

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED