



SHEET 1 OF 1

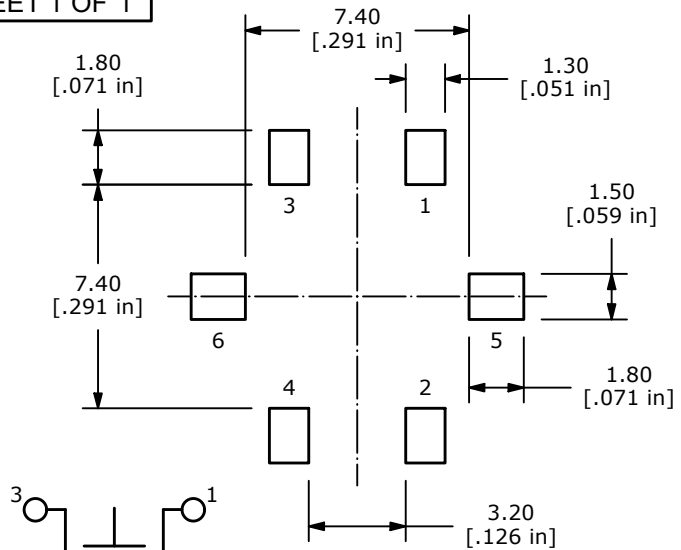





CIRCUIT: SPST
OFF - (ON)

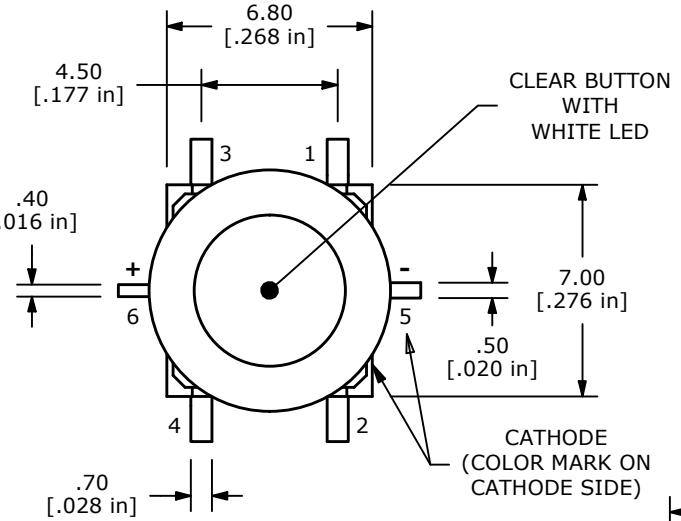



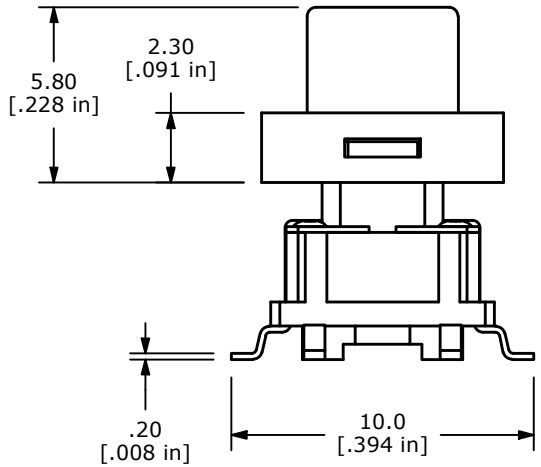

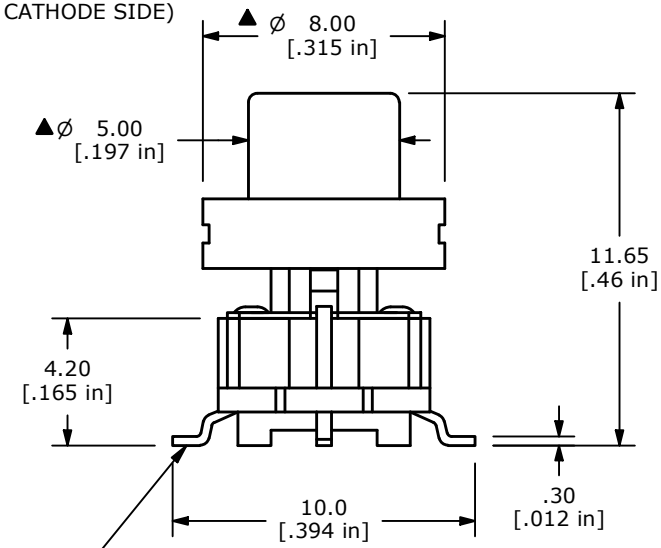

ALL TERMINALS TO BE
COPLANER WITHIN
0.1mm(0.004")

NOTES:
1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ±0.4
   X.XX = ±0.25
3. RATING: 12VDC @ 50mA
4. CONTACT RESISTANCE: 100mΩ MAX.
5. INSULATION RESISTANCE: 100MΩ MIN.
6. OPERATING FORCE: 160 ± 50gf
7. TRAVEL: 0.2 ± 0.1mm
8. OPERATING TEMPERATURE: -40˚C to 85˚C
9. OPERATING LIFE 500,000 CYCLES
▲10. LED COLOR: WHITE
11. ▲ DENOTED CRITICAL PARAMETER
▲12. PACKAGE: SWITCHES ARE 450 PIECES PER REEL
    BUTTONS WILL BE BAGGED SEPARATE
    450 BUTTONS PER BAG.
13. PART TO BE HALOGEN FREE.
14. BUTTONS TO BE ASSEMBLED ONTO THE SWITCH AFTER SOLDERING.

LED SPECS	UNITS	WHITE
FORWARD CURRENT	mA	20
FORWARD VOLTAGE	V	3.20 TYP. - 4.0 MAX
LUMINOUS INTENSITY	MCD	150 TYP.

REV	ECO NO	DESCRIPTION	DATE	BY
A	ECO-102883	RELEASE	07/26/24	JS

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E·SWITCH®

OBJECT ID 100127933

TITLE TL3265WQSCLR

SCALE	DATE	DR	DWG	REV
4:1	7/24/2024	JS	B200086	A