

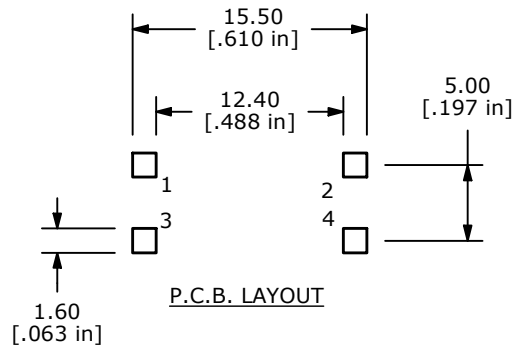
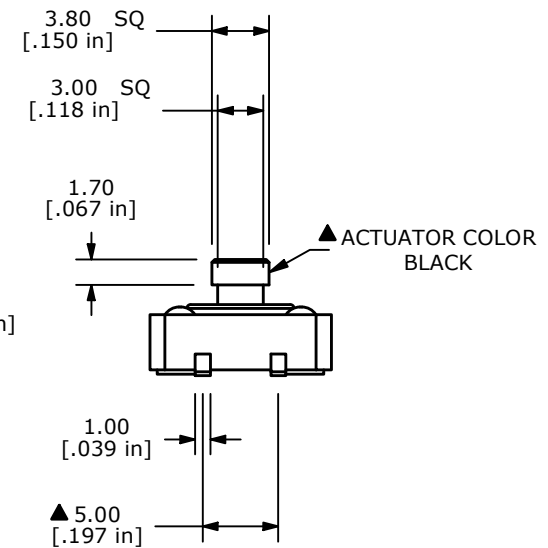
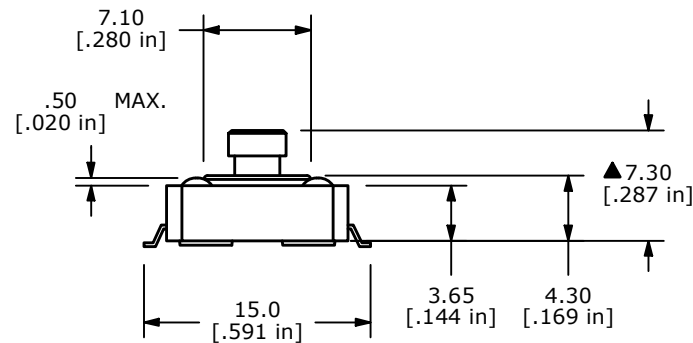


NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERM. NOS. FOR REFERENCE ONLY.
4. RATING: 50mA @ 12VDC
- ▲ 5. OPERATING FORCE: 130 ± 50 gms
6. TRAVEL: 0.35mm ±0.1
7. CONTACT RESISTANCE: 100 MILLI OHMS MAX. (INITIAL)
8. MECHANICAL/ELECTRICAL LIFE 200,000 CYCLES MIN.
9. INSULATION RESISTANCE: 100M OHMS MIN @ 500VAC
10. DIELECTRIC STRENGTH: 250VAC FOR 1 MINUTE.
11. PACKAGING: TAPE & REEL
12. ▲ DENOTES CRITICAL PARAMETER

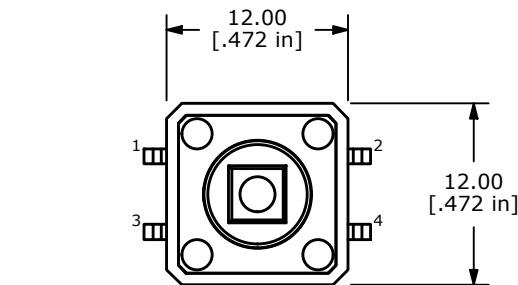

REV	ECO NO	DESCRIPTION	DATE	BY
A	ECO-102987	RELEASE	09/25/24	JS



E-SWITCH®

OBJECT ID
100128438

TITLE TL3300AF130Q				
SCALE 2:1	DATE 9/18/2024	DR JS	DWG N301116	REV A

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO
E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED