SHEET 1 OF 1

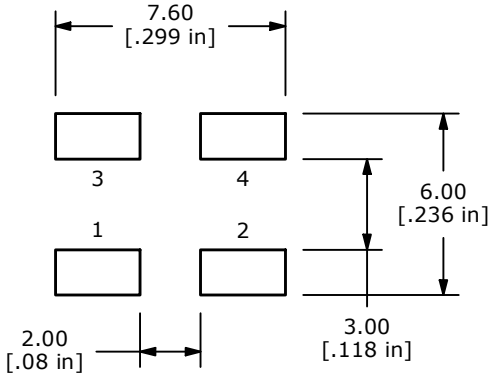

RECOMMENDED PCB LAYOUT

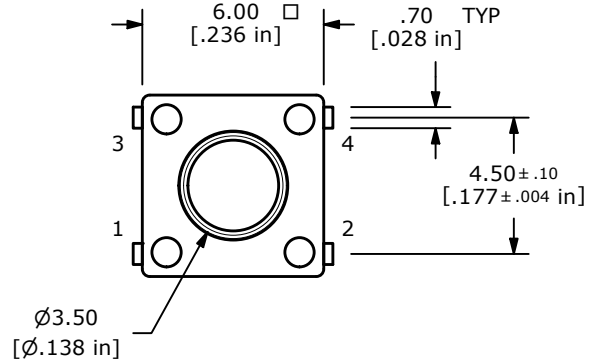





CIRCUIT: SPST

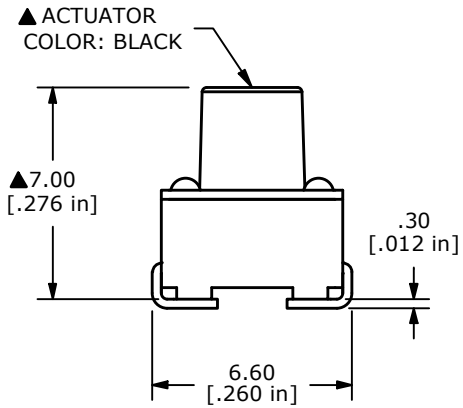

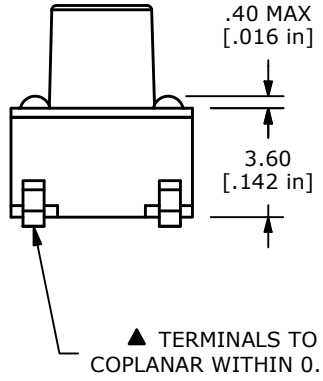

NOTES:
1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X=±0.4
   X.XX=±0.25
3. TERM. NOS. FOR REFERENCE ONLY.
4. RATING: 12VDC, 50mA
▲ 5. OPERATING FORCE: 160 ±50 GF
6. TRAVEL: 0.25MM +0.2/-0.1MM
7. CONTACT RESISTANCE: 100 MILLI OHMS MAX. (INITIAL)
8. MECHANICAL/ELECTRICAL LIFE 100,000 CYCLES MIN.
▲ 9. SILVER CONTACTS
▲ 10. PACKAGE:750 PCS PER TAPE AND REEL
11. ▲ DENOTES CRITICAL PARAMETER
12. OPERATING TEMP: -40°C TO 85°C

REV	ECO NO	DESCRIPTION	DATE	BY
B	ECO-103976	PRINT UPDATE	03/27/26	JS

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E·SWITCH®

OBJECT ID 000018020

TITLE TL3301FF160QJ

SCALE	DATE	DR	DWG	REV
4:1	9/27/2012	RC	P010831	B