


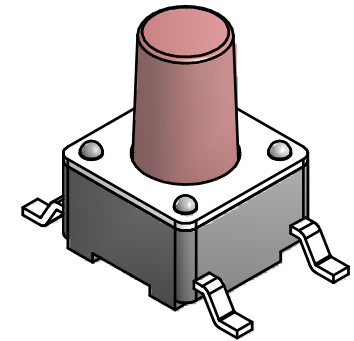
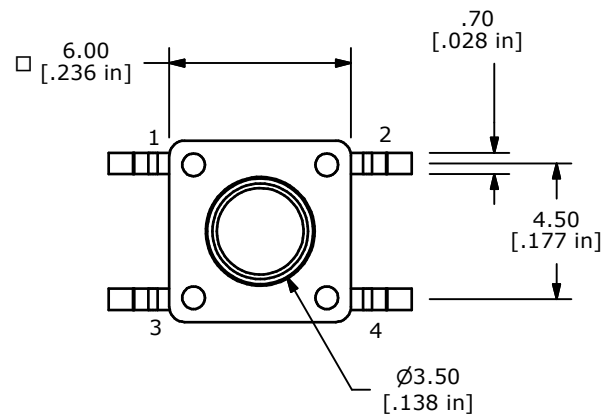



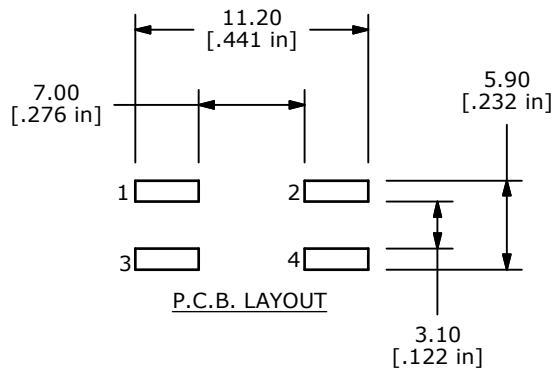

ISOMETRIC

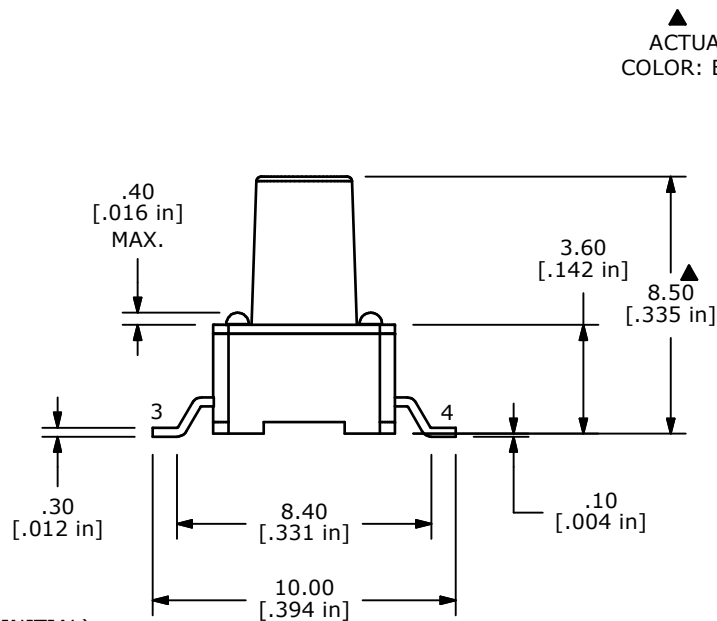

▲ ACTUATOR
COLOR: BROWN

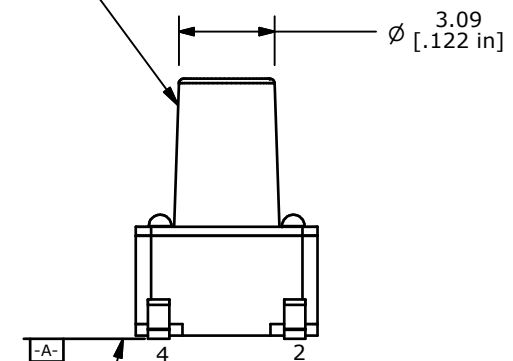

ALL (4) TERMINALS
COPLANAR WITHIN .10 (.004")

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X= ± 0.4
X.XX= ± 0.25
3. TERM. NOS. FOR REFERENCE ONLY.
- ▲ 4. RATING: 12VDC, 50mA
5. OPERATING FORCE: 100 ± 50 gf
6. TRAVEL: 0.25mm +0.2/-0.1mm
7. CONTACT RESISTANCE: 100 MILLI OHMS MAX. (INITIAL)
8. MECHANICAL/ELECTRICAL LIFE: 100,000 CYCLES.
- ▲ 9. CONTACT MATERIAL: SILVER
10. PACKAGING: TAPE AND REEL/650 PER REEL.
11. ▲ DENOTES CRITICAL PARAMETER
12. 2002/95/EC (ROHS) COMPLIANT



TITLE TL3301PF100QG

A	18303	RELEASE FOR PRODUCTION	11/18/08	BLR
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

SCALE 4:1

DATE 11/18/2008

DR BLR

DWG P010691

REV A