
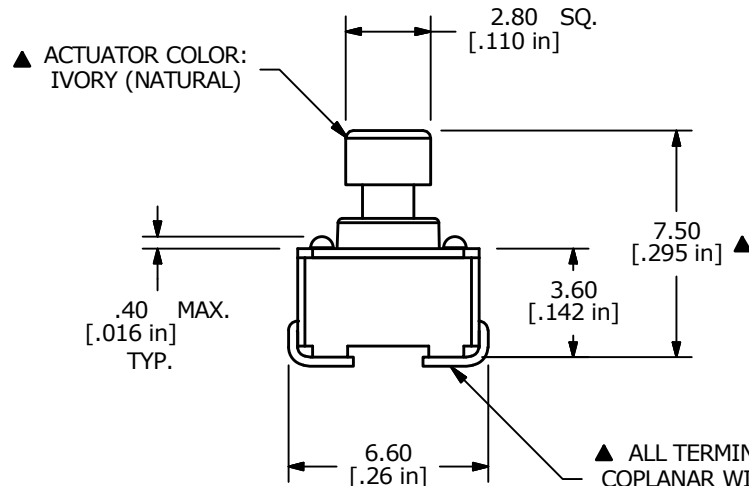


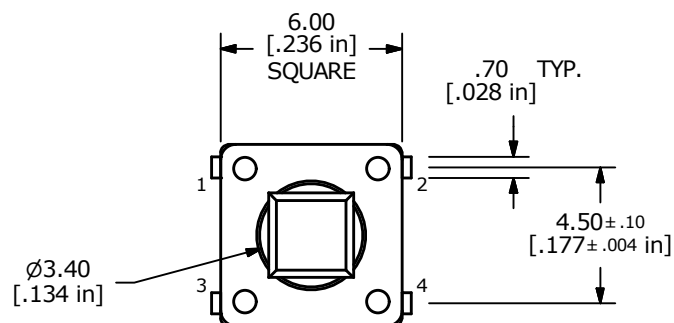


NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. TERM. NUMBERS FOR REFERENCE ONLY.
4. RATING: 50VDC, 50mA
- ▲ 5. OPERATING FORCE: 260 $\pm$ 50 gf
6. TRAVEL: 0.25mm +0.2/-0.1mm
7. CONTACT RESISTANCE: 100 MILLI OHMS MAX. (INITIAL)
8. MECHANICAL/ELECTRICAL LIFE 100,000 CYCLES MIN.
- ▲ 9. SILVER CONTACTS
- ▲ 10. PACKAGE: TAPE AND REEL, 750 PIECES PER REEL
11. ▲ DENOTES CRITICAL PARAMETER

▲ ALL TERMINALS MUST BE
COPLANAR WITHIN 0.10 [.004]
TOTAL

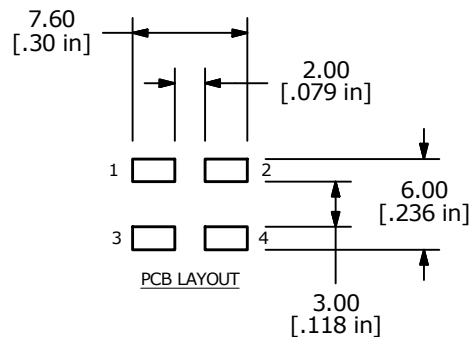

B	22187	UPDATED ACTUATOR COLOR TO IVORY	3/8/16	MR
A	22029	RELEASED FOR PRODUCTION	10/23/15	MW
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

TITLE TL3301SPF260QJ (TAPE and REEL)

SCALE 4:1

DATE 10/23/2015

DR MW

DWG P010888

REV B