


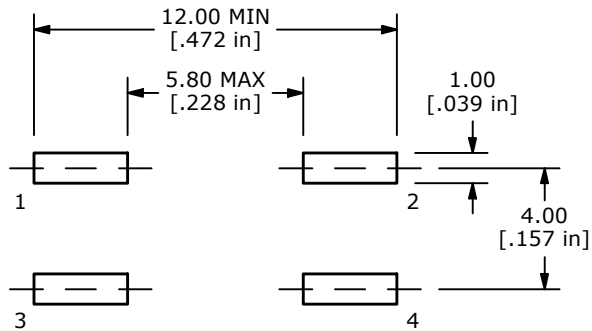




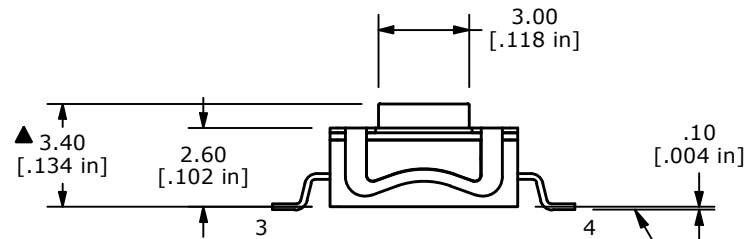

RECOMMENDED P.C.B. LAYOUT



CIRCUIT: SPST

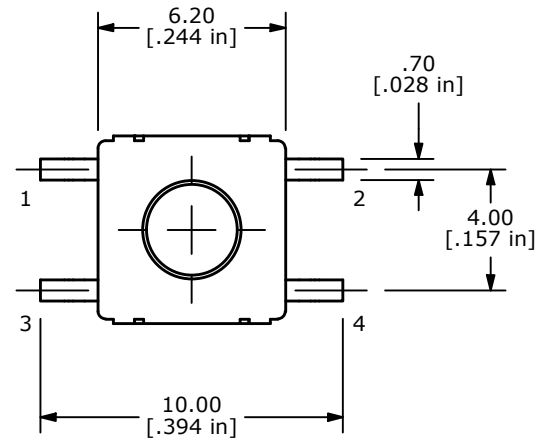

▲ ALL TERMINALS MUST BE CO-PLANAR
WITHIN 0.10 [.004] TOTAL

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: x.x = ± 0.4
x.xx = ± 0.25
3. TERM. NOS. FOR REF. ONLY
4. RATING: 50mA, @12V DC
- ▲ 5. OPERATING FORCE: 160 ± 50 gf
6. TRAVEL: $0.25 +0.2/-0.1$ MM
7. CONTACT RESISTANCE: 100 m Ω MAX.
8. PACKAGING: TAPE AND REEL, 1500 PCS PER REEL
- ▲ 9. CONTACT MATERIAL: SILVER
10. ▲ DENOTES CRITICAL PARAMETER
11. 2011/65/EU (ROHS) COMPLIANT
12. MECHANICAL/ELECTRICAL LIFE: 100,000 CYCLES
13. OPERATING TEMPERATURE: -20°C to 70°C

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
H	ECO-101319	TL3304 SERIES UPDATE	10/20/22	MR	TITLE TL3304AF160QG				000017861
					SCALE	DATE	DR	DWG	REV
					4:1	1/29/2013	EBP	P010538	H

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO
E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED