


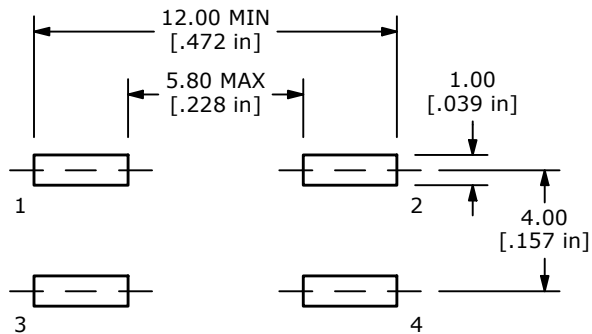




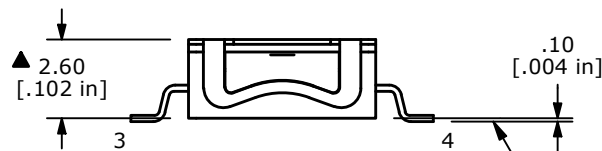

RECOMMENDED P.C.B. LAYOUT



CIRCUIT: SPST

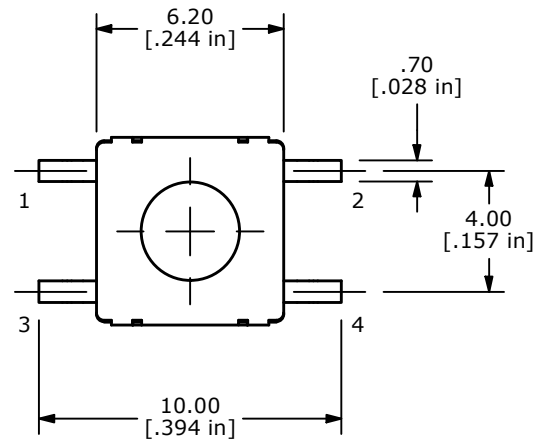

▲ ALL TERMINALS MUST BE CO-PLANAR
WITHIN 0.10 [.004] TOTAL

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: $x.x = \pm 0.4$
 $x.xx = \pm 0.25$
3. TERM. NOS. FOR REF. ONLY
4. RATING: 50mA, @12V DC
- ▲ 5. OPERATING FORCE: $160 \pm 50\text{gf}$
6. TRAVEL: $0.25 +0.2/-0.1\text{MM}$
7. CONTACT RESISTANCE: 100 mΩ MAX.
8. PACKAGING: TAPE AND REEL, 1500 PCS PER REEL
- ▲ 9. CONTACT MATERIAL: SILVER
10. ▲ DENOTES CRITICAL PARAMETER
11. 2011/65/EU (ROHS) COMPLIANT
12. MECHANICAL/ELECTRICAL LIFE: 100,000 CYCLES
13. OPERATING TEMPERATURE: -20°C to 70°C

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
C	ECO-101319	TL3304 SERIES UPDATE	10/20/22	MR	TITLE TL3304NF160QG				000017860
					SCALE	DATE	DR	DWG	REV
					4:1	11/15/2006	TN	P010537	C

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO
E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED