



CIRCUIT: SPST

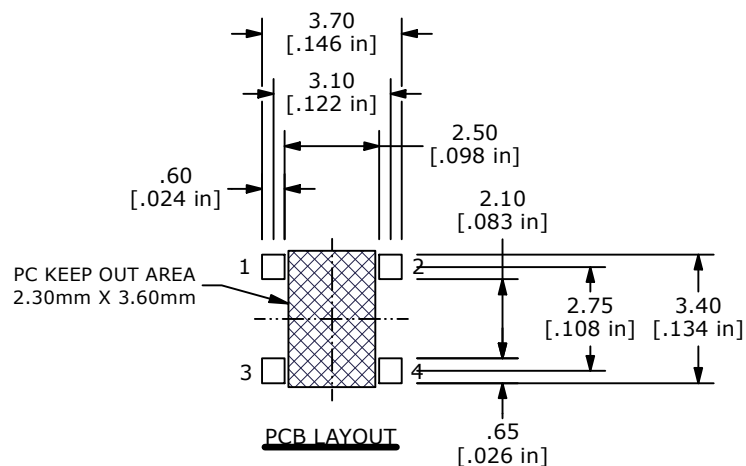

NOTE:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. TERMINAL NUMBERS FOR REF ONLY
4. CONTACT RATING: 12VDC @ 50mA
5. OPERATING LIFE: 100,000 CYCLES
6. CONTACT RESISTANCE: 100m OHMS MAX.
- ▲ 7. OPERATION FORCE: 235 +/-60gf
8. TRAVEL: 0.15mm
9. OPERATING/STORAGE TEMP.: -40°C to +85°C
9. ▲ DENOTES CRITICAL PARAMETER.
10. HALOGEN FREE
11. PACKAGING: TAPE & REEL 8000 PIECES PER REEL

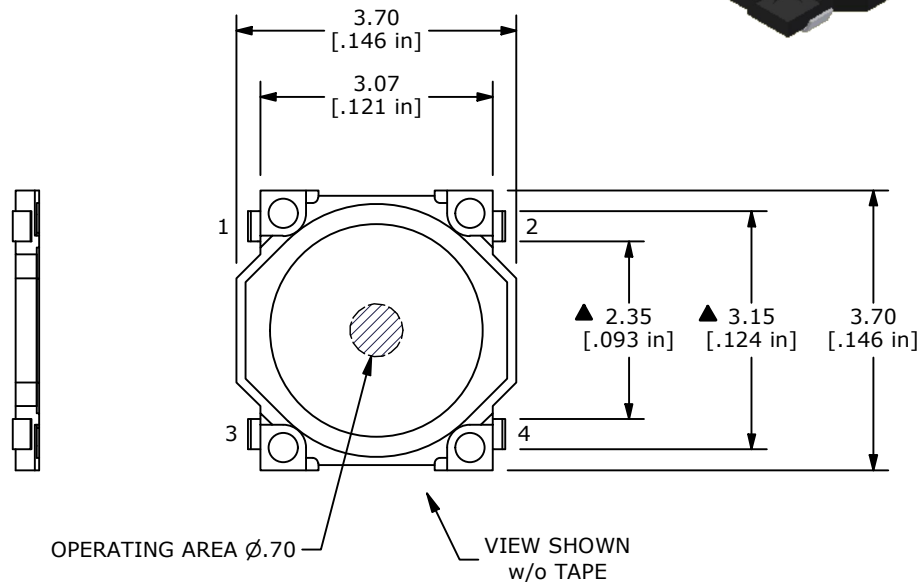

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
B	ECO-102913	NOTE 5: 100,000 WAS 50,000 CYCLES	08/08/24	JS	TITLE TL3312NF235Q				000016942
					SCALE	DATE	DR	DWG	REV
					10:1	6/7/2018	MW	N301202	B

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED