

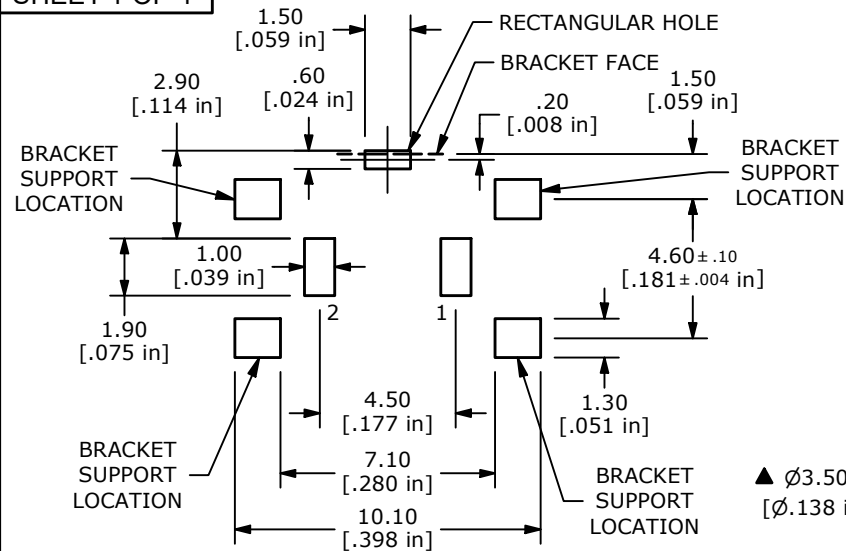
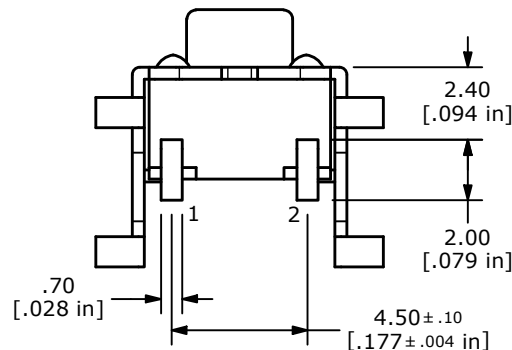
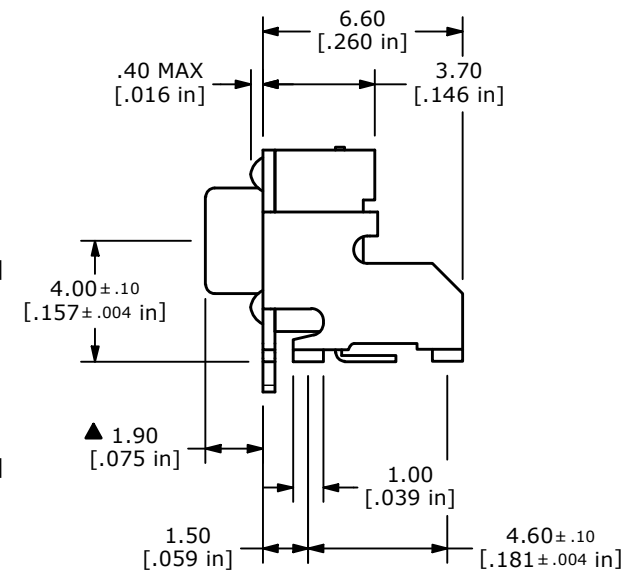
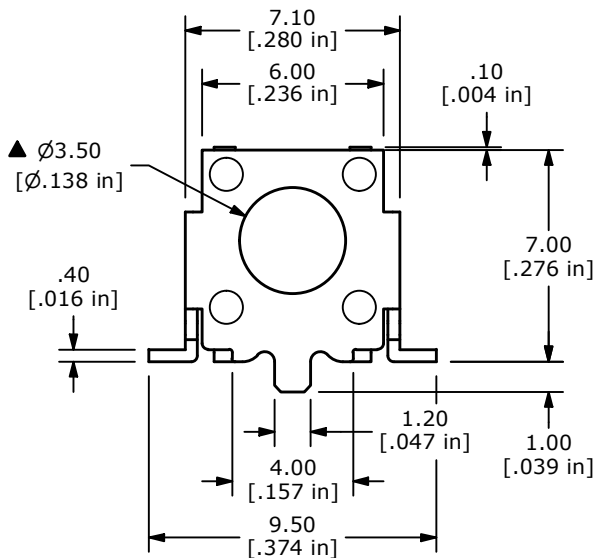


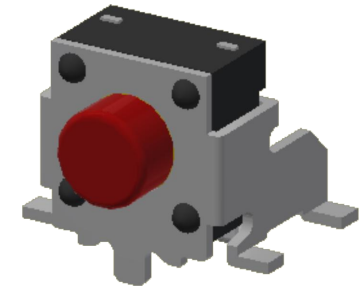

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. TERM. NUMBERS FOR REF. ONLY.
4. RATING: 50mA @12VDC
- ▲ 5. OPERATING FORCE: 260 ± 50 gf
6. TRAVEL: $0.35 + 0.2/-0.1$ mm
7. CONTACT RESISTANCE: 100m Ω MAX.
8. INSULATION RESISTANCE: 100M Ω min.
9. DIELECTRIC STRENGTH: 250V VAC for 1 min
10. ELECTRICAL LIFE: 100,000 CYCLES
- ▲ 11. CONTACT MATERIAL: SILVER
12. ACTUATOR MATERIAL: SILICON
13. ▲ DENOTES CRITICAL PARAMETER
14. OPERATING TEMP: -40°C to 85°C
15. PACKAGING: TAPE AND REEL (650 PER REEL)

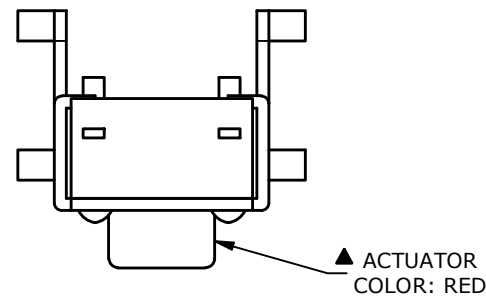

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
A	ECO-103321	Release	03/27/25	MW	TITLE TL3336AF260Q				100129964
					SCALE	DATE	DR	DWG	REV
					4:1	3/20/2025	MW	P158002	A

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO
E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED