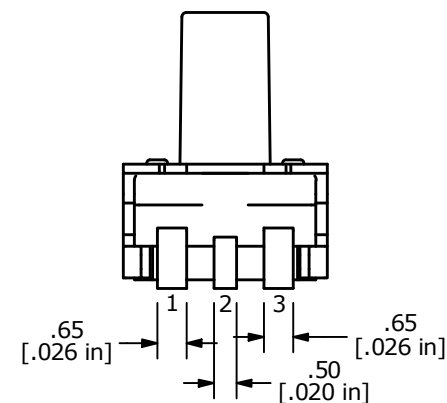
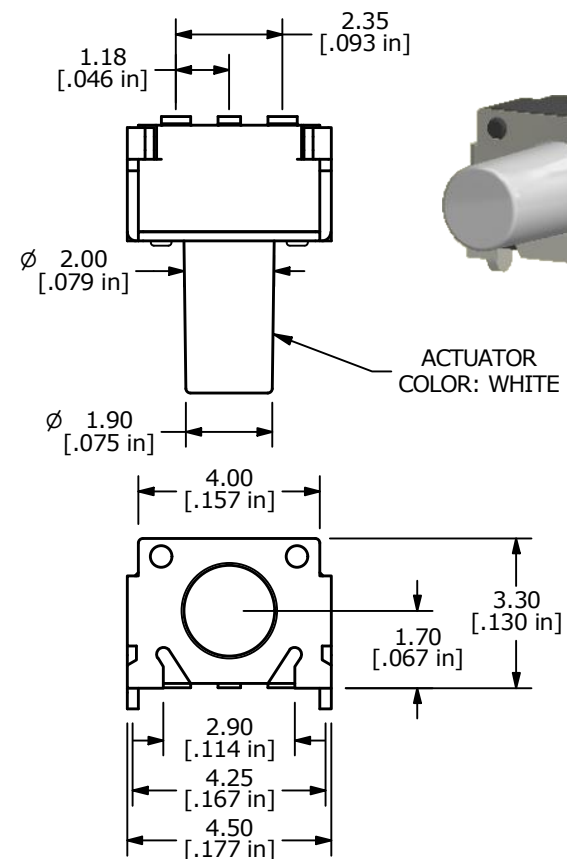
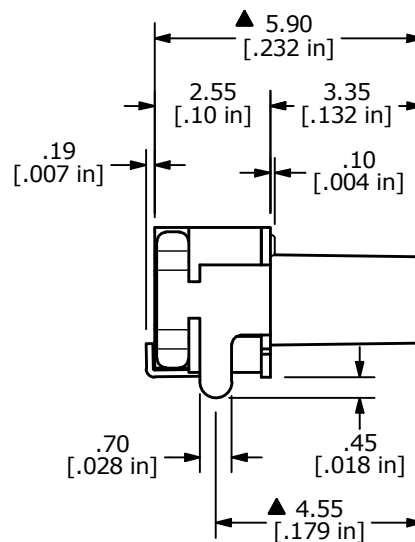
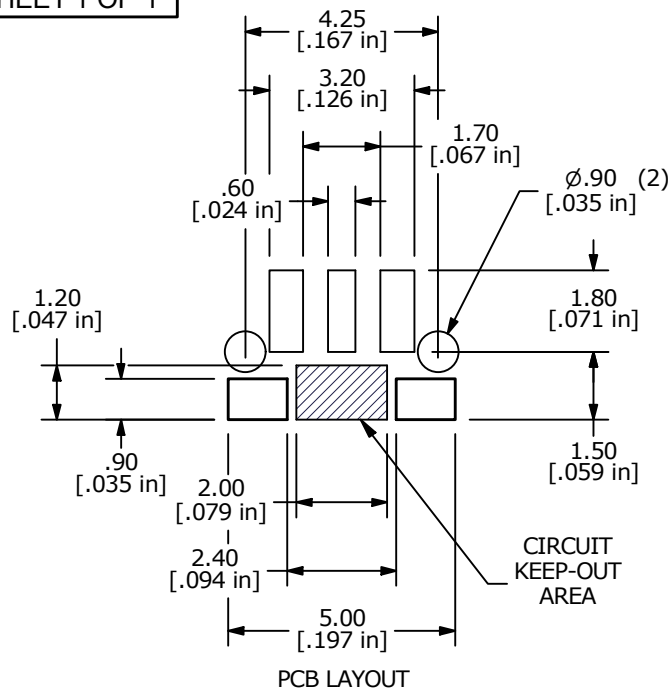


CIRCUIT: SPST
SCHEMATIC

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. TERM. NUMBERS FOR REFERENCE ONLY.
4. RATING: 12VDC, 50mA
- ▲ 5. OPERATING FORCE: 160 ± 50 gf
6. TRAVEL: 0.2mm ± 0.1
7. CONTACT RESISTANCE: 500 MILLI OHMS MAX. (INITIAL)
8. MECHANICAL/ELECTRICAL LIFE: 160g > 100,000 CYCLES
9. SILVER CONTACTS
10. PACKAGING: TAPE & REEL; 1000 PIECES PER REEL.
11. ▲ DENOTES CRITICAL PARAMETER

REV	ECO NO	DESCRIPTION	DATE	BY	 E-SWITCH®					OBJECT ID 100121867
B	ECO-101525	NOTE 10 1000 PIECES WAS 2000 PIECES	12/27/22	JS	TITLE TL3340BF160QG					
A	ECO-100947	Release	05/18/22	MW						
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED					SCALE 6:1	DATE 4/28/2022	DR MW	DWG P021303	REV B	