

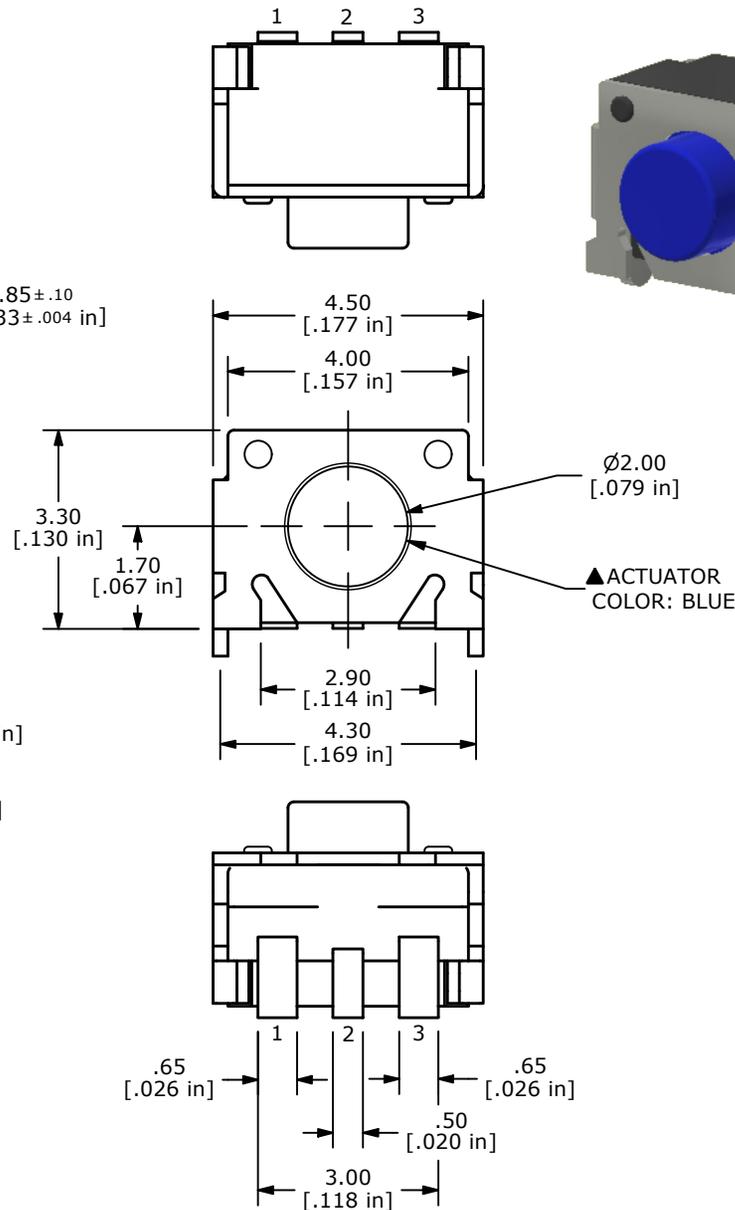


CIRCUIT: SPST

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X = ±0.4
X.XX = ±0.25
3. TERM. NOS. FOR REFERENCE ONLY.
4. RATING: 12VDC, 50mA
- ▲ 5. OPERATING FORCE: 160 ±50gf
6. TRAVEL: 0.25 ±0.1mm
7. CONTACT RESISTANCE: 500 MILLI OHMS MAX. (INITIAL)
8. MECHANICAL/ELECTRICAL LIFE: 300,000 CYCLES
9. SILVER CONTACTS
10. PACKAGING: TAPE & REEL
11. ▲ DENOTES CRITICAL PARAMETER

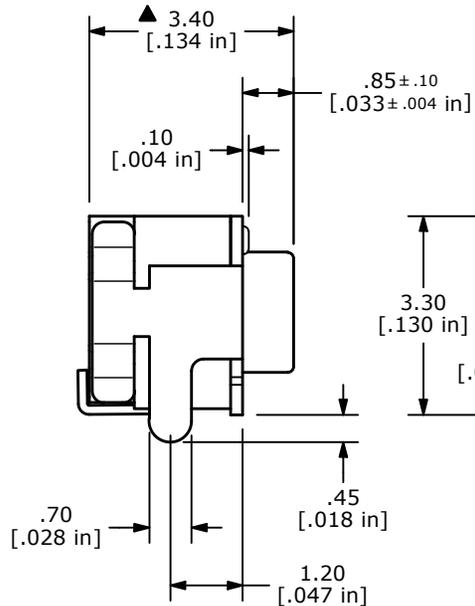

REV	ECO NO	DESCRIPTION	DATE	BY
A	ECO-102989	RELEASE	10/16/24	JS

			OBJECT ID
TITLE TL3340CF160QG			100128448
SCALE	DATE	DR	REV
8:1	9/19/2024	JS	A

SCALE	DATE	DR	DWG
8:1	9/19/2024	JS	P021310