



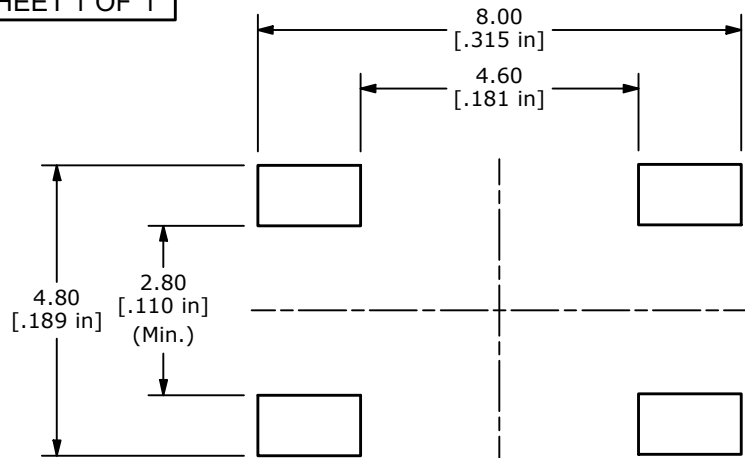





P.C. LAYOUT



CIRCUIT: SPST

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. TERM. NUMBERS FOR REFERENCE ONLY.
4. RATING: 12VDC @50 MILLI-AMPS
- ▲ 5. OPERATING FORCE: 100 ± 30 gf
6. TRAVEL: 0.25mm +0.1/-0.2mm
7. MECHANICAL/ELECTRICAL LIFE: 1,000,000 CYCLES
- ▲ 8. CONTACT MATERIAL: SILVER
9. CONTACT RESISTANCE: 100m Ohms max.
- ▲ 10. PACKAGE: TAPE AND REEL, 4000 PER REEL
11. ▲ DENOTES CRITICAL PARAMETER

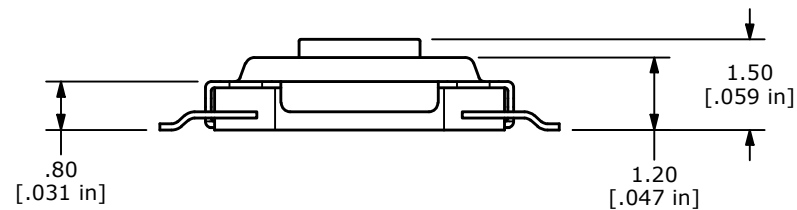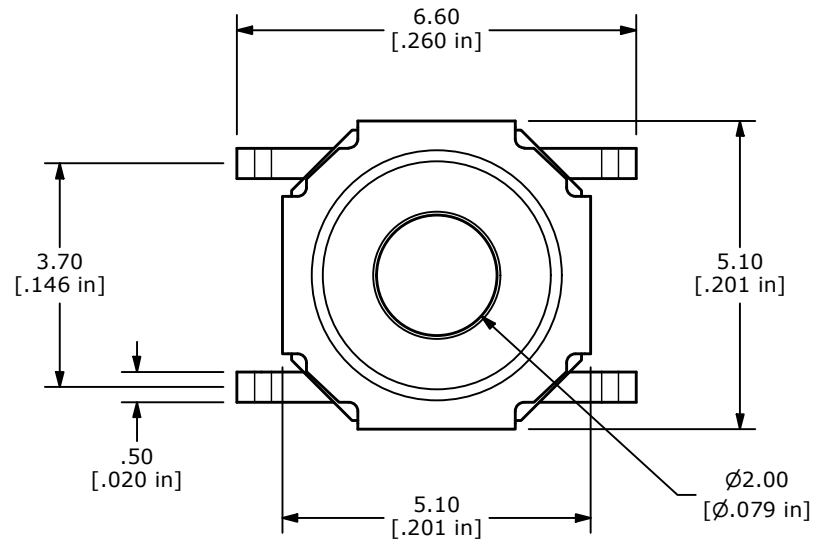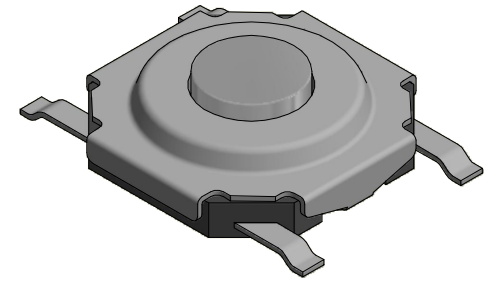

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
A	ECO-103561	Release	07/31/25	MW	TITLE TL3342F100QG				100130770
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED					SCALE	DATE	DR	DWG	REV
					8:1	7/29/2025	MW	P010699	A