
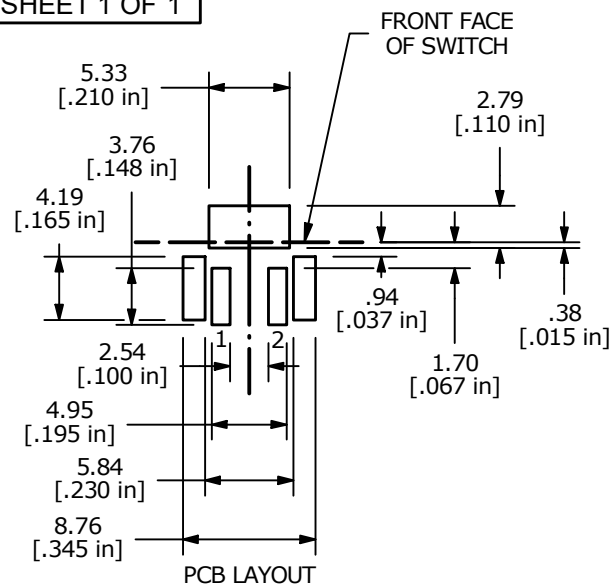
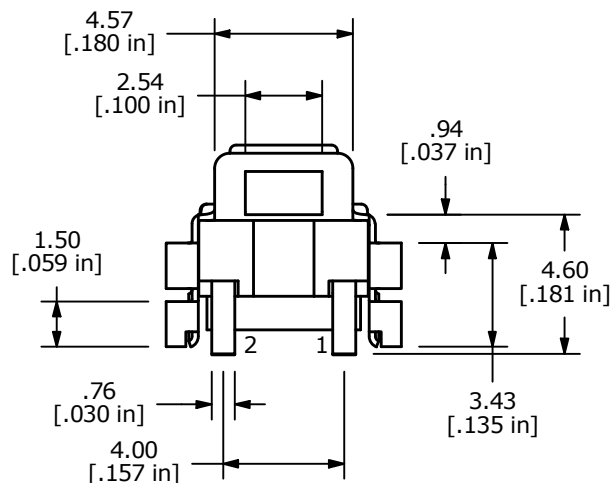
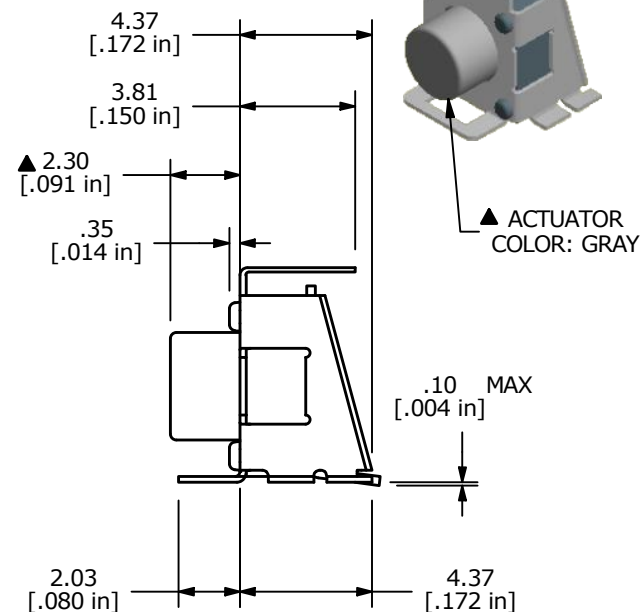


▲ SPST CIRCUIT

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.20
3. CONTACT RATING: 50mA @ 12VDC
4. CONTACT RESISTANCE: 100mΩ MAX.
5. INSULATION RESISTANCE: 10MΩ MIN @ 500VDC.
- ▲ 6. OPERATING FORCE: 185 ± 50gf
7. TRAVEL: 0.15 mm MINIMUM
8. OPERATING TEMPERATURE: -25°C TO + 70°C
- ▲ 9. OPERATING LIFE: 200,000 CYCLES
10. CONTACTS: GOLD
11. ▲ DENOTES CRITICAL PARAMETERS
12. PACKAGE: TAPE AND REEL - 550 PIECES PER REEL

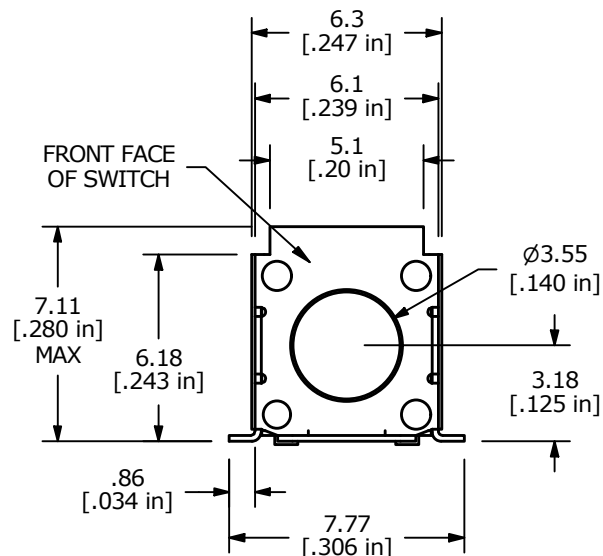

REV	ECO NO	DESCRIPTION	DATE	BY	 E-SWITCH®					OBJECT ID
B	ECO-101869	TRAVEL 0.15mm MINIMUM	05/03/23	JS	TITLE TL3360AF185KR					100122944
A	ECO-101300	RELEASE	11/07/22	JS						
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED					SCALE 4:1	DATE 10/26/2022	DR JS	DWG N330008	REV B	