



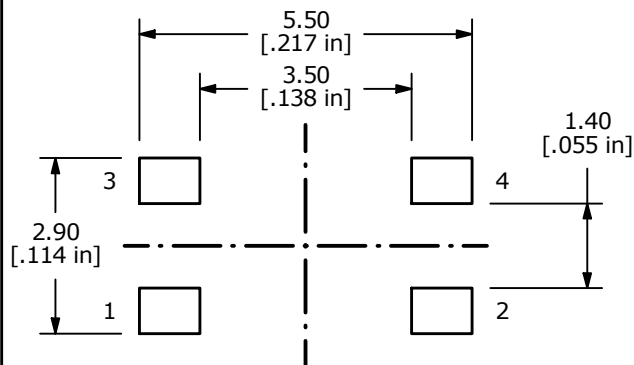





PCB LAYOUT



▲ CIRCUIT: SPST

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
 $x.x = \pm 0.4$
 $x.xx = \pm 0.25$
2. TERMINAL NUMBERS FOR REF. ONLY
3. CONTACT MATERIAL: SILVER
4. CONTACT RATING: 50 mA; 12 VDC
5. TRAVEL: 0.2 ± 0.1 mm
- ▲ 6. OPERATING FORCE: 250 ± 50 GRAMS
7. ELECTRICAL LIFE: 100,000 CYCLES
8. CONTACT RESISTANCE: $100m\Omega$ MAX.
9. ▲ DENOTES CRITICAL PARAMETER
10. INSULATION RESISTANCE: $100M\Omega$ MIN @ 100VDC.
11. DIELECTRIC STRENGTH: 250VAC FOR 1 MINUTE WITH NO BREAK DOWN

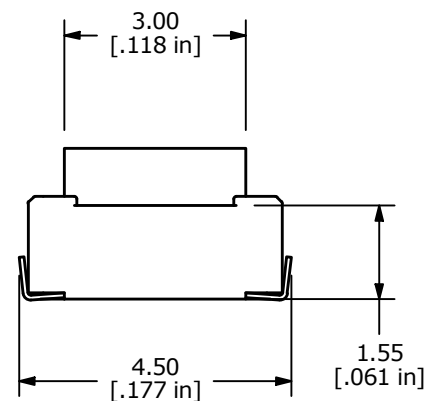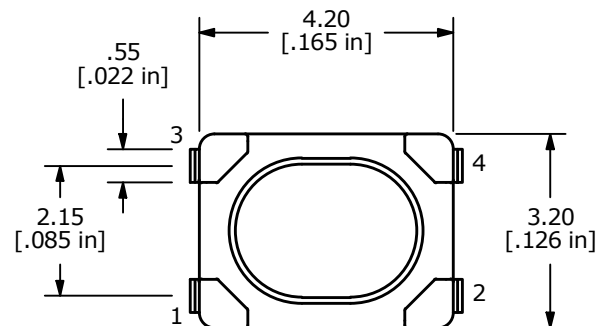

REV	ECO NO	DESCRIPTION	DATE	BY	 E-SWITCH®				OBJECT ID
A	ECO-101234	RELEASE	09/13/22	JS	TITLE TL3365AF250QG				100122710
					SCALE	DATE	DR	DWG	REV
					8:1	9/12/2022	JS	P003112	A

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED