

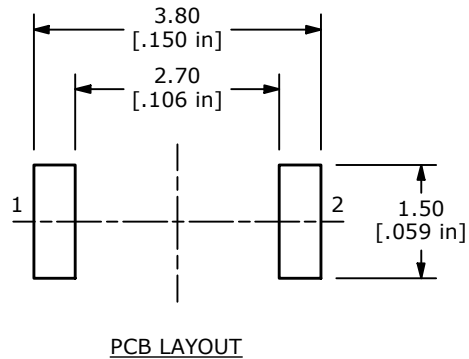

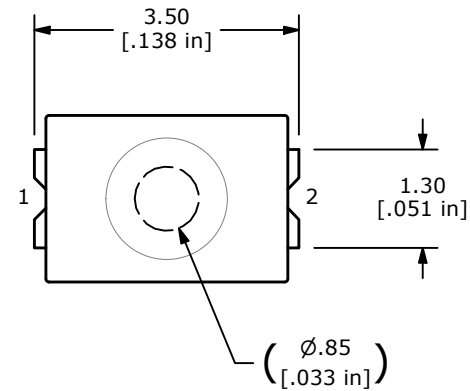


▲ CIRCUIT: SPST

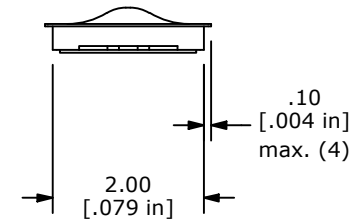

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: $x.x = \pm 0.4$
 $x.xx = \pm 0.25$
3. TERMINAL NUMBERS FOR REF. ONLY
4. CONTACT MATERIAL: SILVER
5. CONTACT RATING: 50mA; 12VDC
6. TRAVEL: 0.13 ± 0.05 mm
- ▲ 7. OPERATING FORCE: 330 ± 70 gf
8. ELECTRICAL LIFE: 300,000 CYCLES
9. CONTACT RESISTANCE: $500\text{m}\Omega$ MAX.
10. ▲ DENOTES CRITICAL PARAMETER
11. BOUNCE: 10m SECONDS MAX
12. INSULATION RESISTANCE: $50\text{M}\Omega$ MIN @ 100VDC.
13. DIELECTRIC STRENGTH: 250VAC FOR 1 MINUTE WITH NO BREAK DOWN
14. OPERATING TEMPERATURE: -40C to +85C

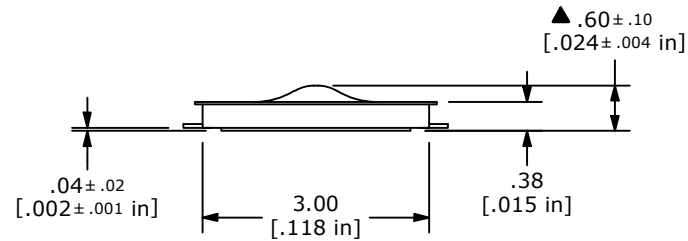

C	24479	Updated Terminals	9/9/20	MW	 E-SWITCH® OBJECT ID 000017310						
B	22666	Updated drawing title	1/9/17	rc	TITLE TL3780AF330QG						
A	22197	New Release	3/14/16	rc							
REV	PCR NO	DESCRIPTION	DATE	BY	SCALE 10:1		DATE 3/14/2016		DR rc	DWG P003021	REV C
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED											

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO
E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED