
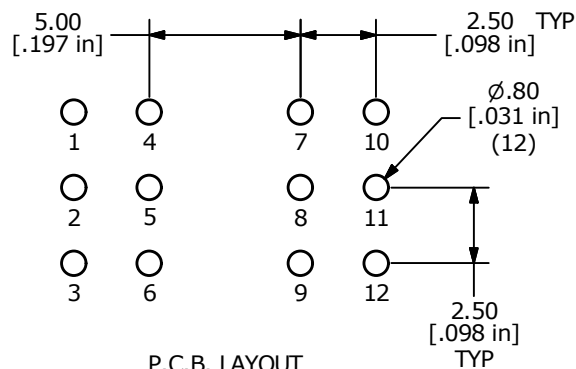
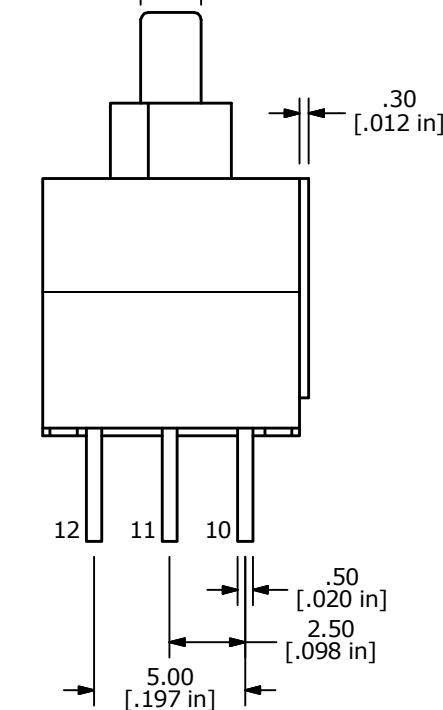
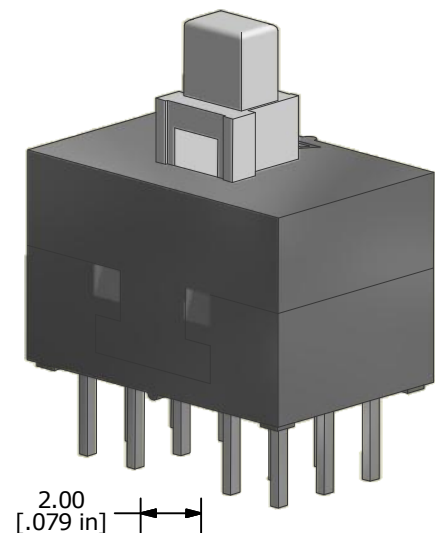
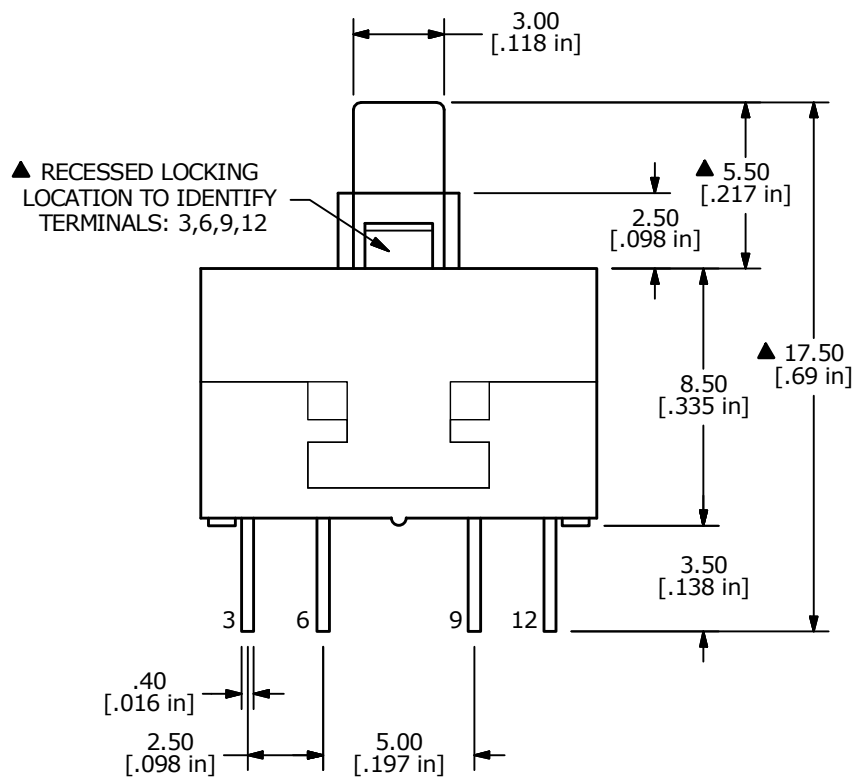


SWITCH FUNCTION	
POS. 1	POS. 2
ON	(ON)
1-2,4-5 7-8,10-11	2-3,5-6 8-9,11-12

(ON) = MOMENTARY

NOTES:

- ALL DIMENSIONS IN MM [INCH]
- GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
- TERMINAL NUMBERS FOR REF. ONLY
- RATING: 0.1A @ 30VDC
- TRAVEL: FULL = 2.5mm
- OPERATING FORCE: 300gf ± 70 gf
- ELECTRICAL LIFE: 10,000 CYCLES
- ▲ DENOTES CRITICAL PARAMETER
- CONTACT MATERIAL: SILVER
- INSULATION RESISTANCE: 100 M Ω MIN.
- DIELECTRIC STRENGTH: 500 VAC
- OPERATING TEMPERATURE: -30°C to +85°C

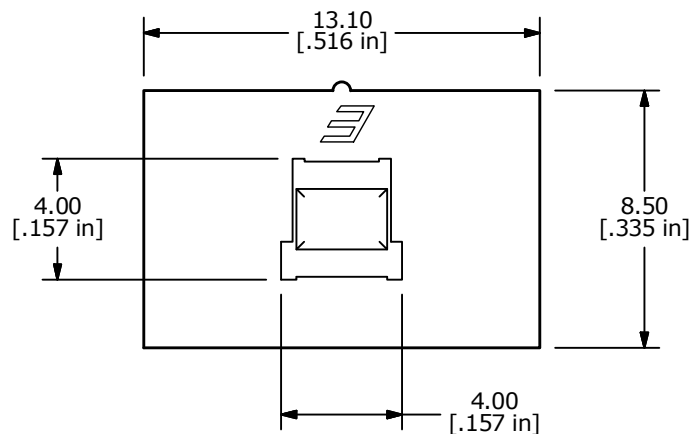

E-SWITCH®

C	24239	correct switch function to ON-(ON)	3/30/20	MW
B	19691	DRAWING UPDATE	2/18/11	BGL
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

TITLE TL4201OAXA

SCALE

4:1

DATE

2/18/2011

DR

BGL

DWG

P010881

REV

C