

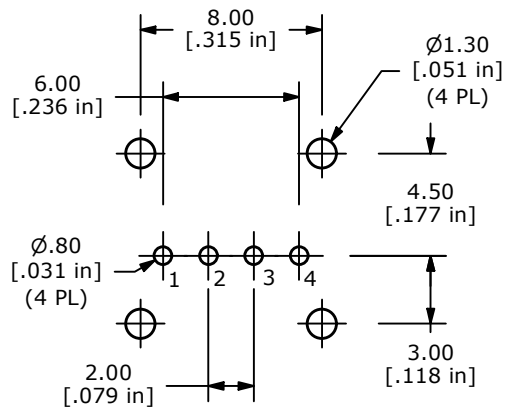
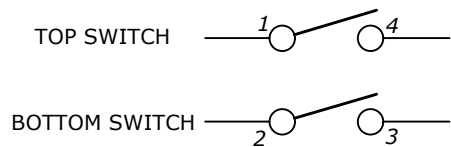


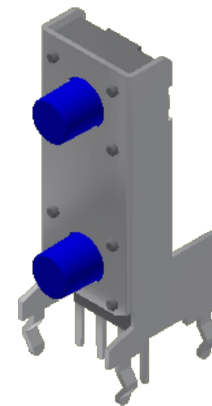



RECOMMENDED PCB LAYOUT



▲ SCHEMATIC

NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: $X.X = \pm 0.4$
 $X.XX = \pm 0.25$
3. TERM. NOS. FOR REFERENCE ONLY.
4. CONTACT RATING: 50mA @12VDC
5. TRAVEL: $0.25 + 0.2 / - 0.1$ mm
6. CONTACT RESISTANCE: 100 Milli-Ohms Max.
7. OPERATING FORCE: 160 ± 50 gf
8. OPERATING TEMP. -20°C TO 70°C
- ▲ 9. CONTACT MATERIAL: SILVER
- 10.▲ DENOTES CRITICAL PARAMETER.
- ▲ 11. PACKAGE: TRAY/ 200 PIECES PER

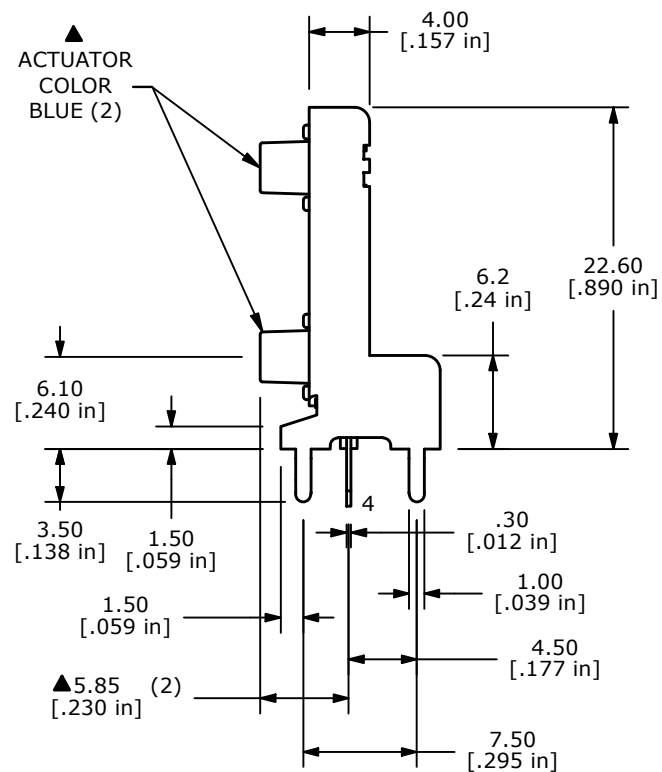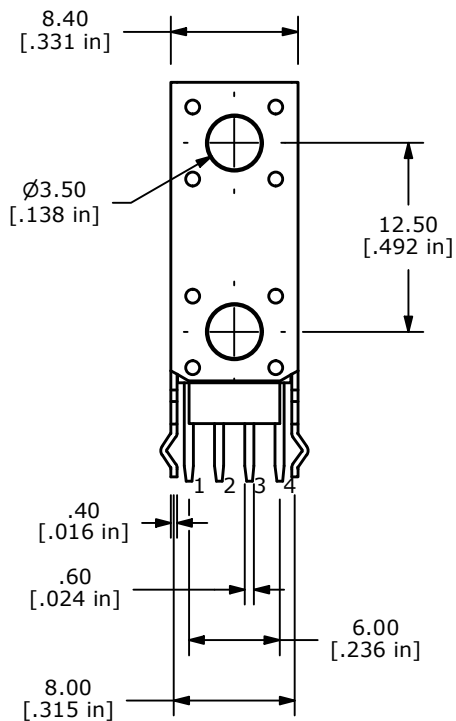

REV	ECO NO	DESCRIPTION	DATE	BY	 E-SWITCH®					OBJECT ID
D	ECO-102579	PRINT UPDATE	03/26/24	JS						000017909
					TITLE TL53BF160Q					
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED					SCALE 2:1	DATE 1/11/2011	DR BGL	DWG P010606	REV D	