




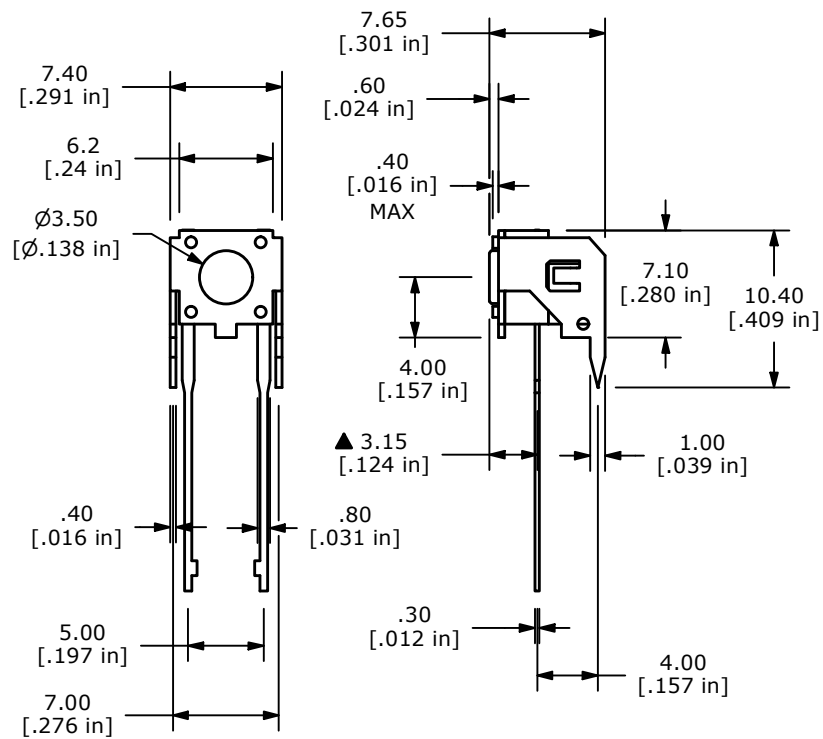


NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. TERMINAL NUMBERS FOR REF ONLY
4. CONTACT RATING: 20mA, @ 15VDC
- ▲ 5. OPERATING FORCE: 100 ± 30gf
6. TRAVEL: 0.25 + 0.2 / -0.1 mm
7. LIFE EXPECTANCY: 100,000 CYCLES
8. CONTACT RESISTANCE: 50 mΩ MAX.
- ▲ 9. CONTACT MATERIAL: SILVER
10. OPERATING TEMP.: -40° TO 85°C
11. INSULATION RESISTANCE: 100MΩ MIN.
12. ▲ DENOTES CRITICAL PARAMETER.

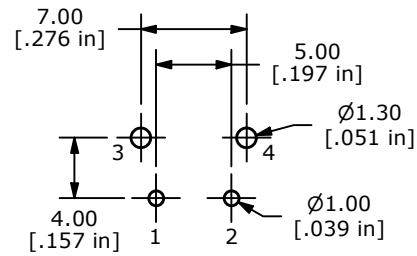

PCB LAYOUT

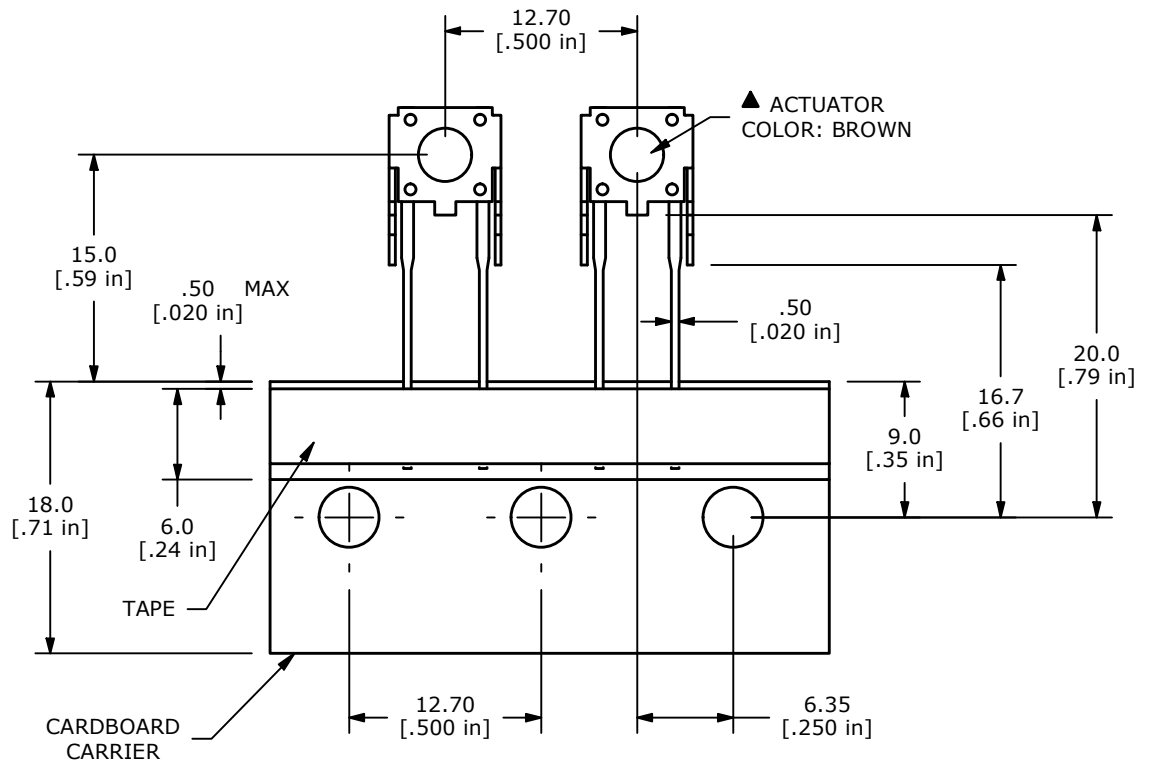

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
D	ECO-102452	UPDATE PRINT TO CURRENT STANDARDS	03/29/24	JS	TITLE TL58WF100Q				000017912
					SCALE	DATE	DR	DWG	REV
					2:1	2/23/2010	BLR	P010610	D

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED