






PCB LAYOUT

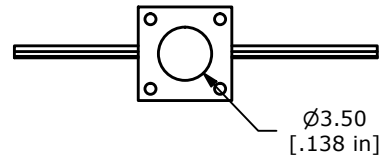

SCHEMATIC

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=± 0.4mm
X.XX=± 0.25mm
3. CONTACT RATING: 50mA @ 12VDC
4. CONTACT MATERIAL: SILVER
- ▲ 5. OPERATING FORCE: 260± 50gf
6. TRAVEL: 0.25 +0.2/-0.1mm
7. CONTACT RESISTANCE: 100mΩ MAX.
8. ELECTRICAL LIFE: 100,000 CYCLES
9. PACKAGING: CARRIER IS FOLDED EVERY 25 PITCHES
(24) SWITCHES PER FOLD. 1,000 SWITCHES PER BOX.
10. OPERATING TEMP: -40°C TO 85°C
11. ▲ DENOTES CRITICAL PRAMETERS.

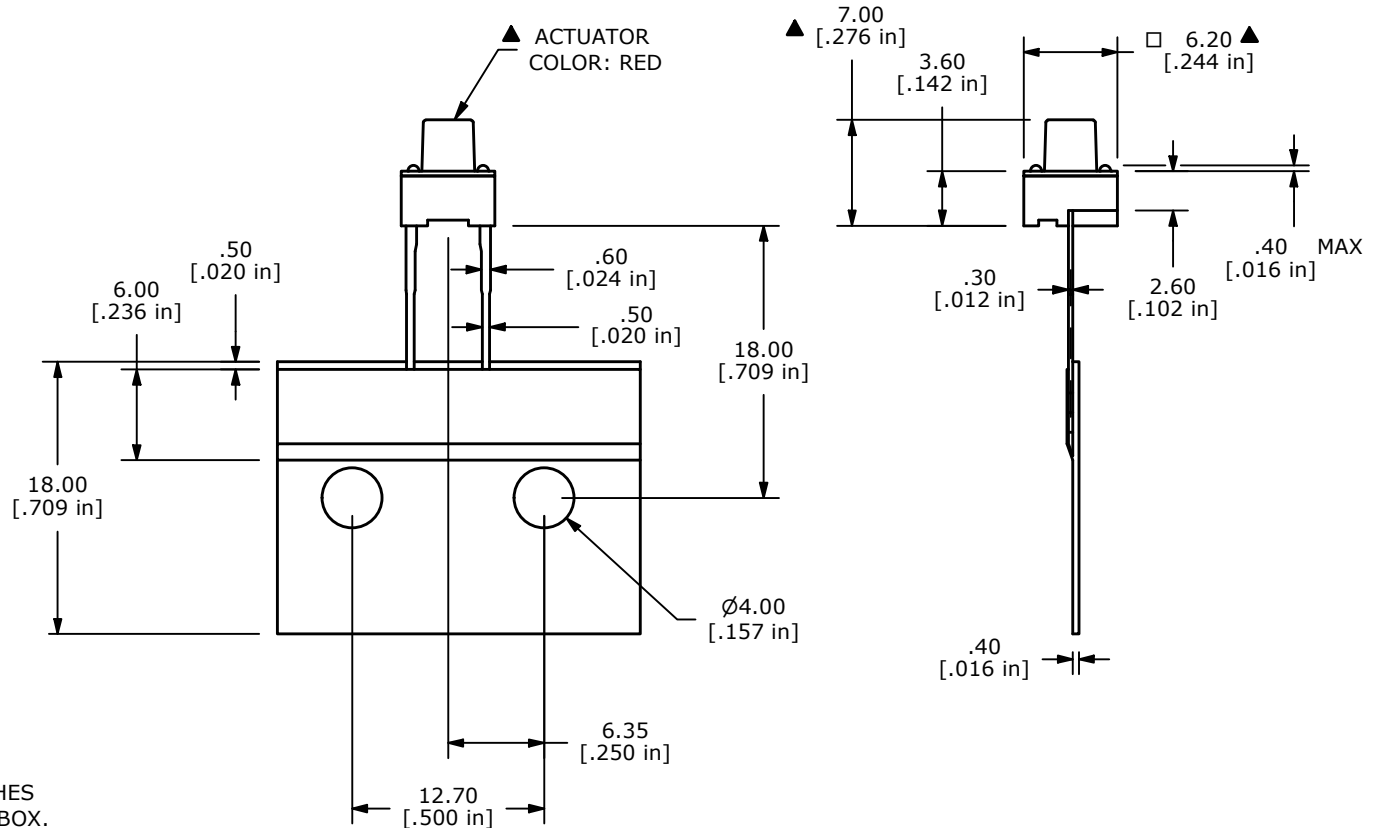

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
C	ECO-102541	PRINT UPDATED TO CURRENT STANDARDS	05/01/24	JS	TITLE TL59FF260Q				000017882
					SCALE	DATE	DR	DWG	REV
					2:1	2/12/1996	MM	P010564	C

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO
E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED