
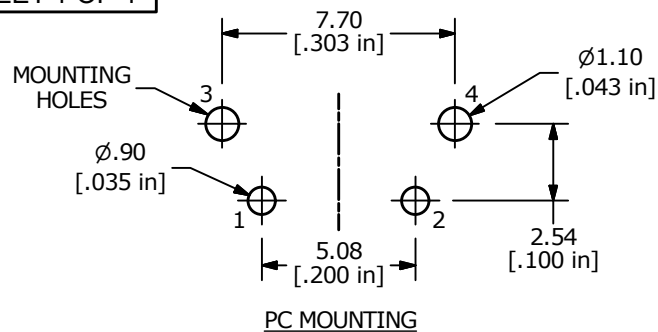
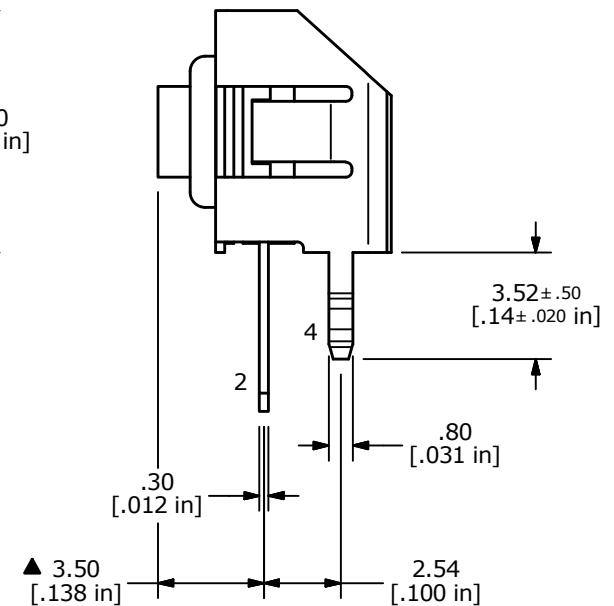
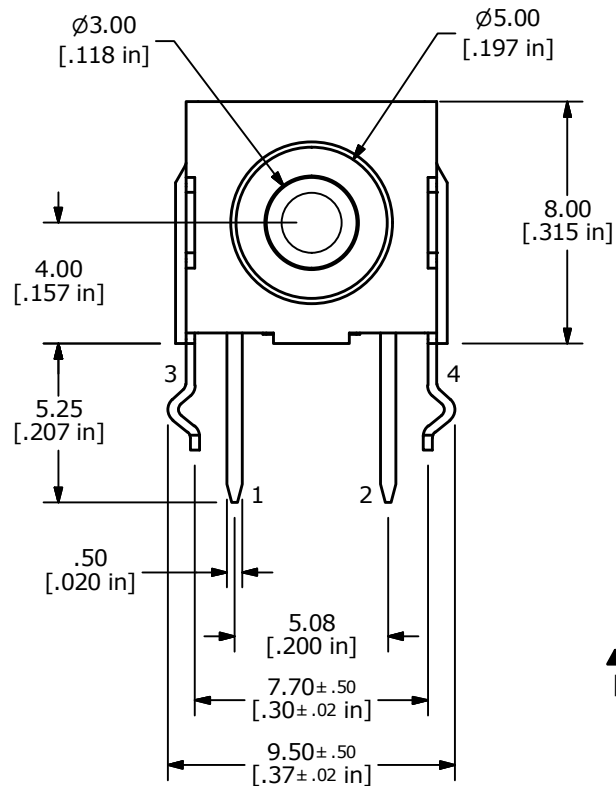
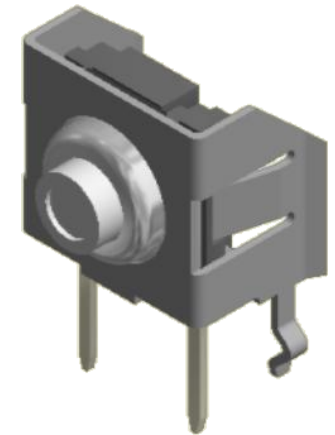


NOTES

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. TERMINAL NUMBERS FOR REF. ONLY.
- ▲ 4. OPERATING FORCE: $500 \pm 100\text{gf}$
5. OPERATING LIFE: 200,000 CYCLES
6. TRAVEL: $0.5 \pm 0.15\text{mm}$
7. CONTACT RATING: 12VDC @ 50mA
8. CONTACT RESISTANCE: $100\text{m} \Omega$ MAX
9. INSULATION RESISTANCE: $100\text{M} \Omega$ MIN @ 100VDC
- ▲ 10. CONTACT MATERIAL: SILVER
11. OPERATING TEMPERATURE: -40°C to 85°C
12. PACKAGING: TUBE 52 PCS. PER TUBE
13. ▲ DENOTES CRITICAL PARAMETER

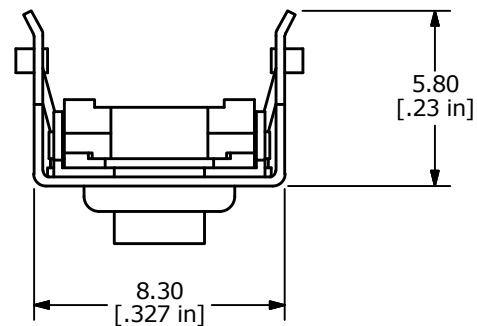

C	23559	update drawing	9/10/18	MW
B	21552	CORRECT NOTED TOLERANCE	8/19/14	EBP
A	21167	New Release	6/18/13	rc
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED



E-SWITCH®

TITLE TL6110AF500QP

SCALE
4:1DATE
6/18/2013DR
rcDWG
T351010REV
C