
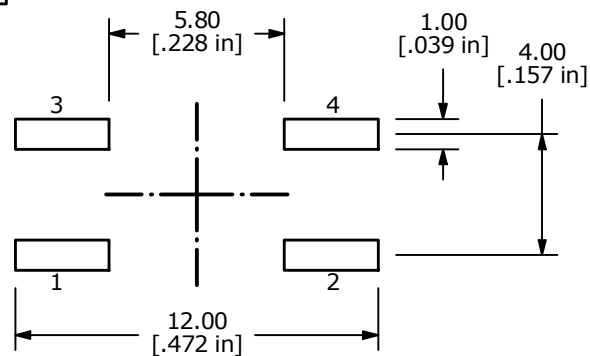
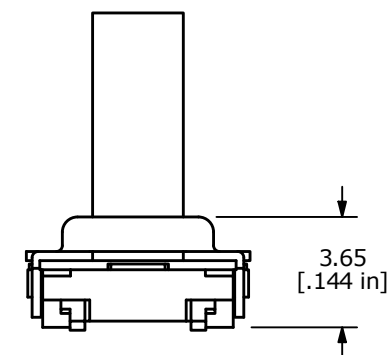
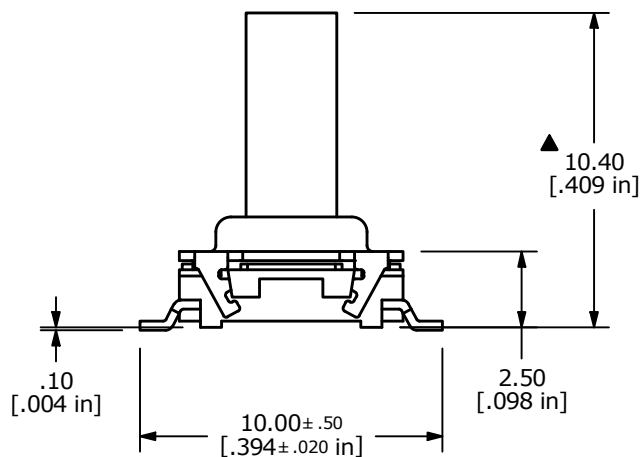
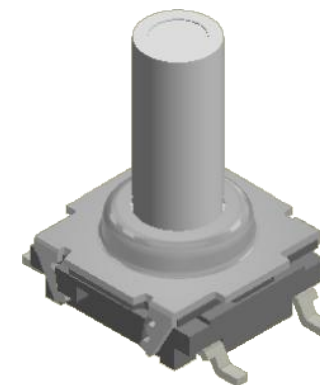


▲ CIRCUIT: SPST

NOTES

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X = ± 0.4
X.XX = ± 0.25
3. TERMINAL NUMBERS FOR REF. ONLY.
- ▲ 4. OPERATING FORCE: $130 \pm 50\text{gf}$
5. OPERATING LIFE: 1,000,000 CYCLES
6. TRAVEL: $0.5 \pm 0.15\text{mm}$
7. CONTACT RATING: 12VDC @ 50mA
8. CONTACT RESISTANCE: $100\text{m}\Omega$ MAX
9. INSULATION RESISTANCE: $100\text{M}\Omega$ MIN @ 100VDC.
- ▲ 10. CONTACT MATERIAL: SILVER
11. OPERATING TEMPERATURE: -40°C TO 85°C
12. PACKAGING: TAPE & REEL, 350 PCS. PER REEL
13. ▲ DENOTES CRITICAL PARAMETER

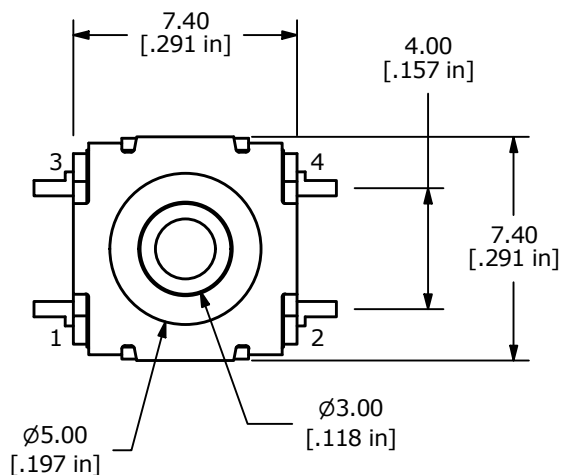

REV	ECO NO	DESCRIPTION	DATE	BY	E-SWITCH®				OBJECT ID
A	ECO-101942	RELEASE	05/30/23	JS	TITLE TL6120DF130QG				100124711
					SCALE	DATE	DR	DWG	REV
					4:1	5/17/2023	JS	T351527	A

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED